OVERVIEW OF FEATURES FINEA LIGHT CHANNEL CONFIGURATION

TRILUX
SIMPLIFY YOUR LIGHT.

LIGHT QUALITY MEETS DESIGN
With TRILUX ConVision® technology, FINEA ensures maximum visual comfort and pampers the viewer with expressive aesthetics.

VERSATILE – FOR HOLISTIC LIGHTING CONCEPTS
Whether recessed in the ceiling, surface-mounted, suspended or with track adapter – FINEA responds to all building conditions and offers planning freedom.

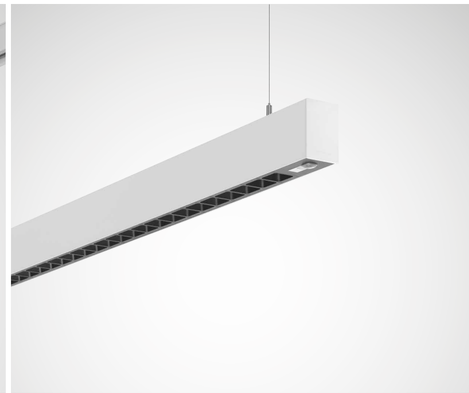

FULLY INTEGRATED AND CONFIGURABLE
Whether continuous line or individual luminaire – light management systems embed themselves seamlessly into the FINEA system architecture.

ATTRACTIVE ALL ALONG THE LINE
Used as a wall light with direct or direct/indirect light distribution, vertical surfaces can be perfectly emphasised and accentuated.

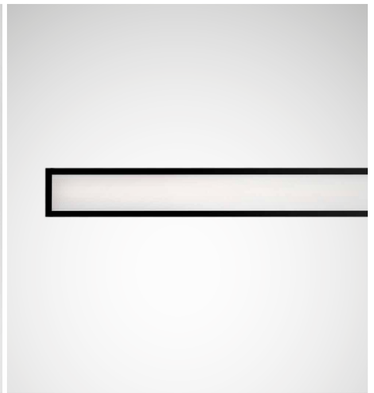

PURE MINIMALISM
FINEA effortlessly guides you through the depth of the room and remains discreetly in the background.

System form	Profile width	Profile colours	Light distribution specs / Optics	Kelvin	CRI	Max. system lumen		Mounting options	Step lengths 70 mm	Light strip	LiveLink	3h	UR	Conduit conduction	Switching	Suspension	Electrical feeding
	35 mm 50 mm 70 mm		ConVision®, 30° ConVision®, 60° Prismatic (CDP) Opal diffuser Black diffuser Wallwasher Blind segments	2,700 K 3,000 K 4,000 K HCL ACTIVE	CRI 80+ CRI 90+		2,000 lm/m 2,500 lm/m 3,500 lm/m 4,500 lm/m	recessed, with trim	✓	✓	✓	✓	✓	Quick contact plug 5 pol 5+2 pol	ET ETDD ETDD ETDD	2,000 mm 3,000 mm 5,000 mm	terminal block 100 cm lead + Wieland 1GST3 100 cm lead + Wieland 1GST5
								surface mounted	✓	✓	✓	✓	✓				
								conductor rail adapter	✓								
								suspended, direct	✓	✓	✓	✓	✓				
								suspended, direct/indirect	✓	✓	✓	✓	✓				
								wall mounted, direct	✓								
								wall mounted, direct/indirect	✓								