


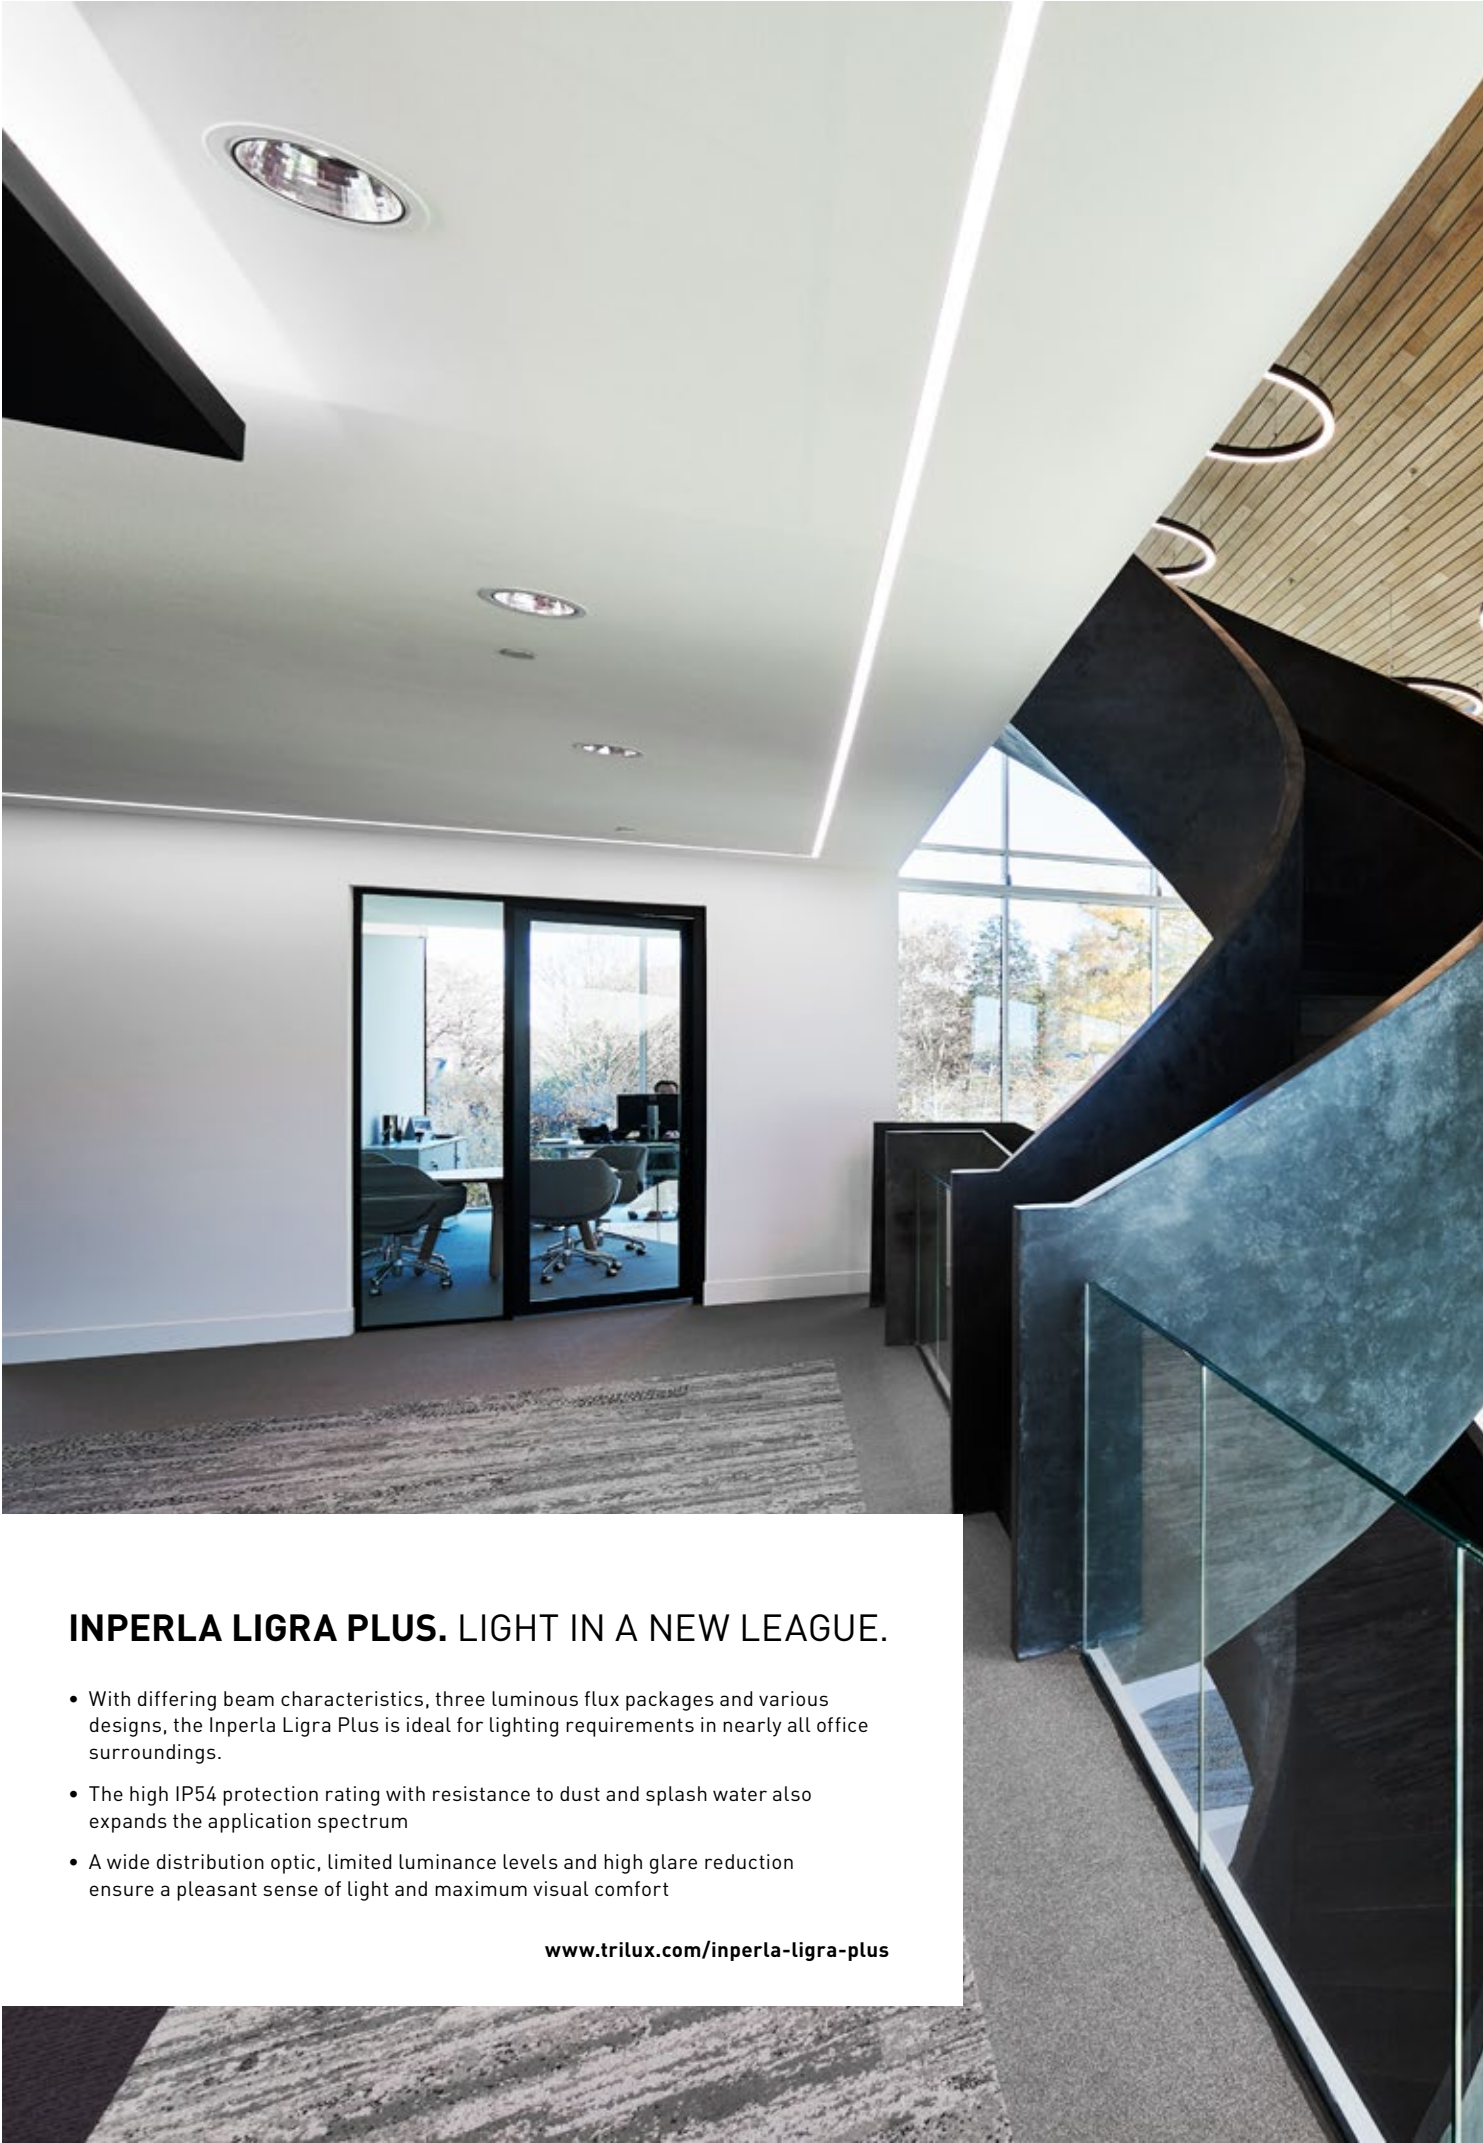

INPERLA LIGRA PLUS. LIGHT IN A NEW LEAGUE.

- With differing beam characteristics, three luminous flux packages and various designs, the Inperla Ligra Plus is ideal for lighting requirements in nearly all office surroundings.
- The high IP54 protection rating with resistance to dust and splash water also expands the application spectrum
- A wide distribution optic, limited luminance levels and high glare reduction ensure a pleasant sense of light and maximum visual comfort

www.trilux.com/inperla-ligra-plus

Detailed product information:
www.trilux.com/inperla-ligra-plus



Inperla Ligra Plus	
	Mounting type Recessed
	Mounting location Ceiling Ceiling with casting box Ceiling with panel system System ceiling with exposed grids System ceiling with concealed grids
	Design round
	Size 140 mm
	Beam characteristic wide
	Luminaire luminous flux 1,000 - 2,700 lm
	Colour rendering index Light colour Ra > 80, Ra > 90 3,000 K 4,000 K
	Service life L85 = 50,000 h L80 = 70,000 h
	Luminaire colour white silver-grey
	Operating mode switchable and DALI dimmable (ETDD) switchable (ET)
	Additional equipment Single battery system, 3 hours
	Accessories Concrete casting box Decorative covers Decorative covers (IP54) made of glass Decorative rings Decorative cylinders Mounting cases for panel ceilings Mounting plates Refurbishment plates



INPERLA LIGRA PLUS

DOWNLIGHTS

Photometric and decorative accessories



Refurbishment

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.