


Detailed product information: www.trilux.com/quira www.trilux.com/quira-plus



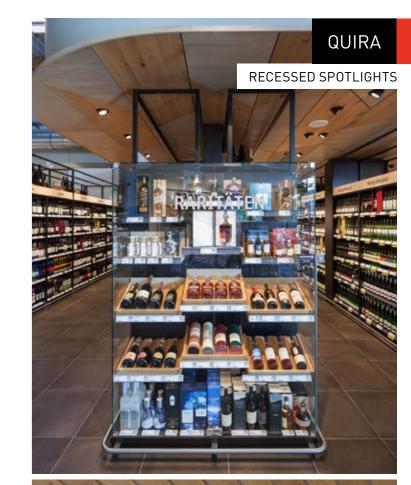

Quira Quira Plus

Mounting type

Recessed

✓ Functions

General lighting Accent lighting

Light point height 2.8 - 4.5 m

🚡 Beam characteristic

spot medium flood flood wide flood very wide flood

Luminaire luminous flux
1,500 lm - 5,000 lm (Quira)
2,000 lm - 7,000 lm (Quira Plus)

-Ò- Colour rendering index | Light colour

Ra > 80 2,700 K 3,000 K 3,500 K 4,000 K Ra > 90 4,000 K - Efficient Cool (EC)

2,700 K - Brilliant Food (BF) 3,100 K - Brilliant Colour (BC) 3,200 K - Efficient White (EW)

Meat (M) Meat + Fish (M+F) Tunable White Tunable Meat

① Service life L80 = 50,000 h

C Luminaire colour


black silver-grey white

□ Operating mode

switchable and DALI dimmable (ETDD)
Bluetooth Low Energy (ETBLE) switchable (ET)

((j)) Connectivity Casambi capable



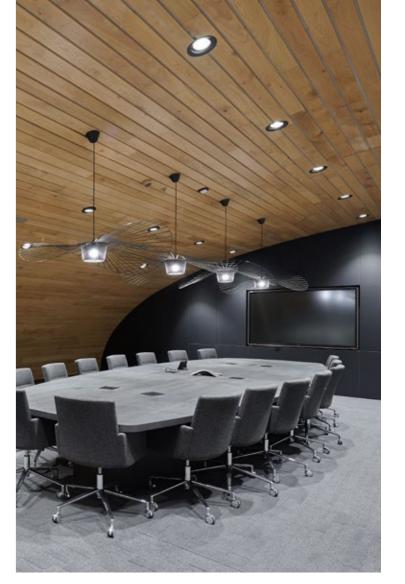

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43