


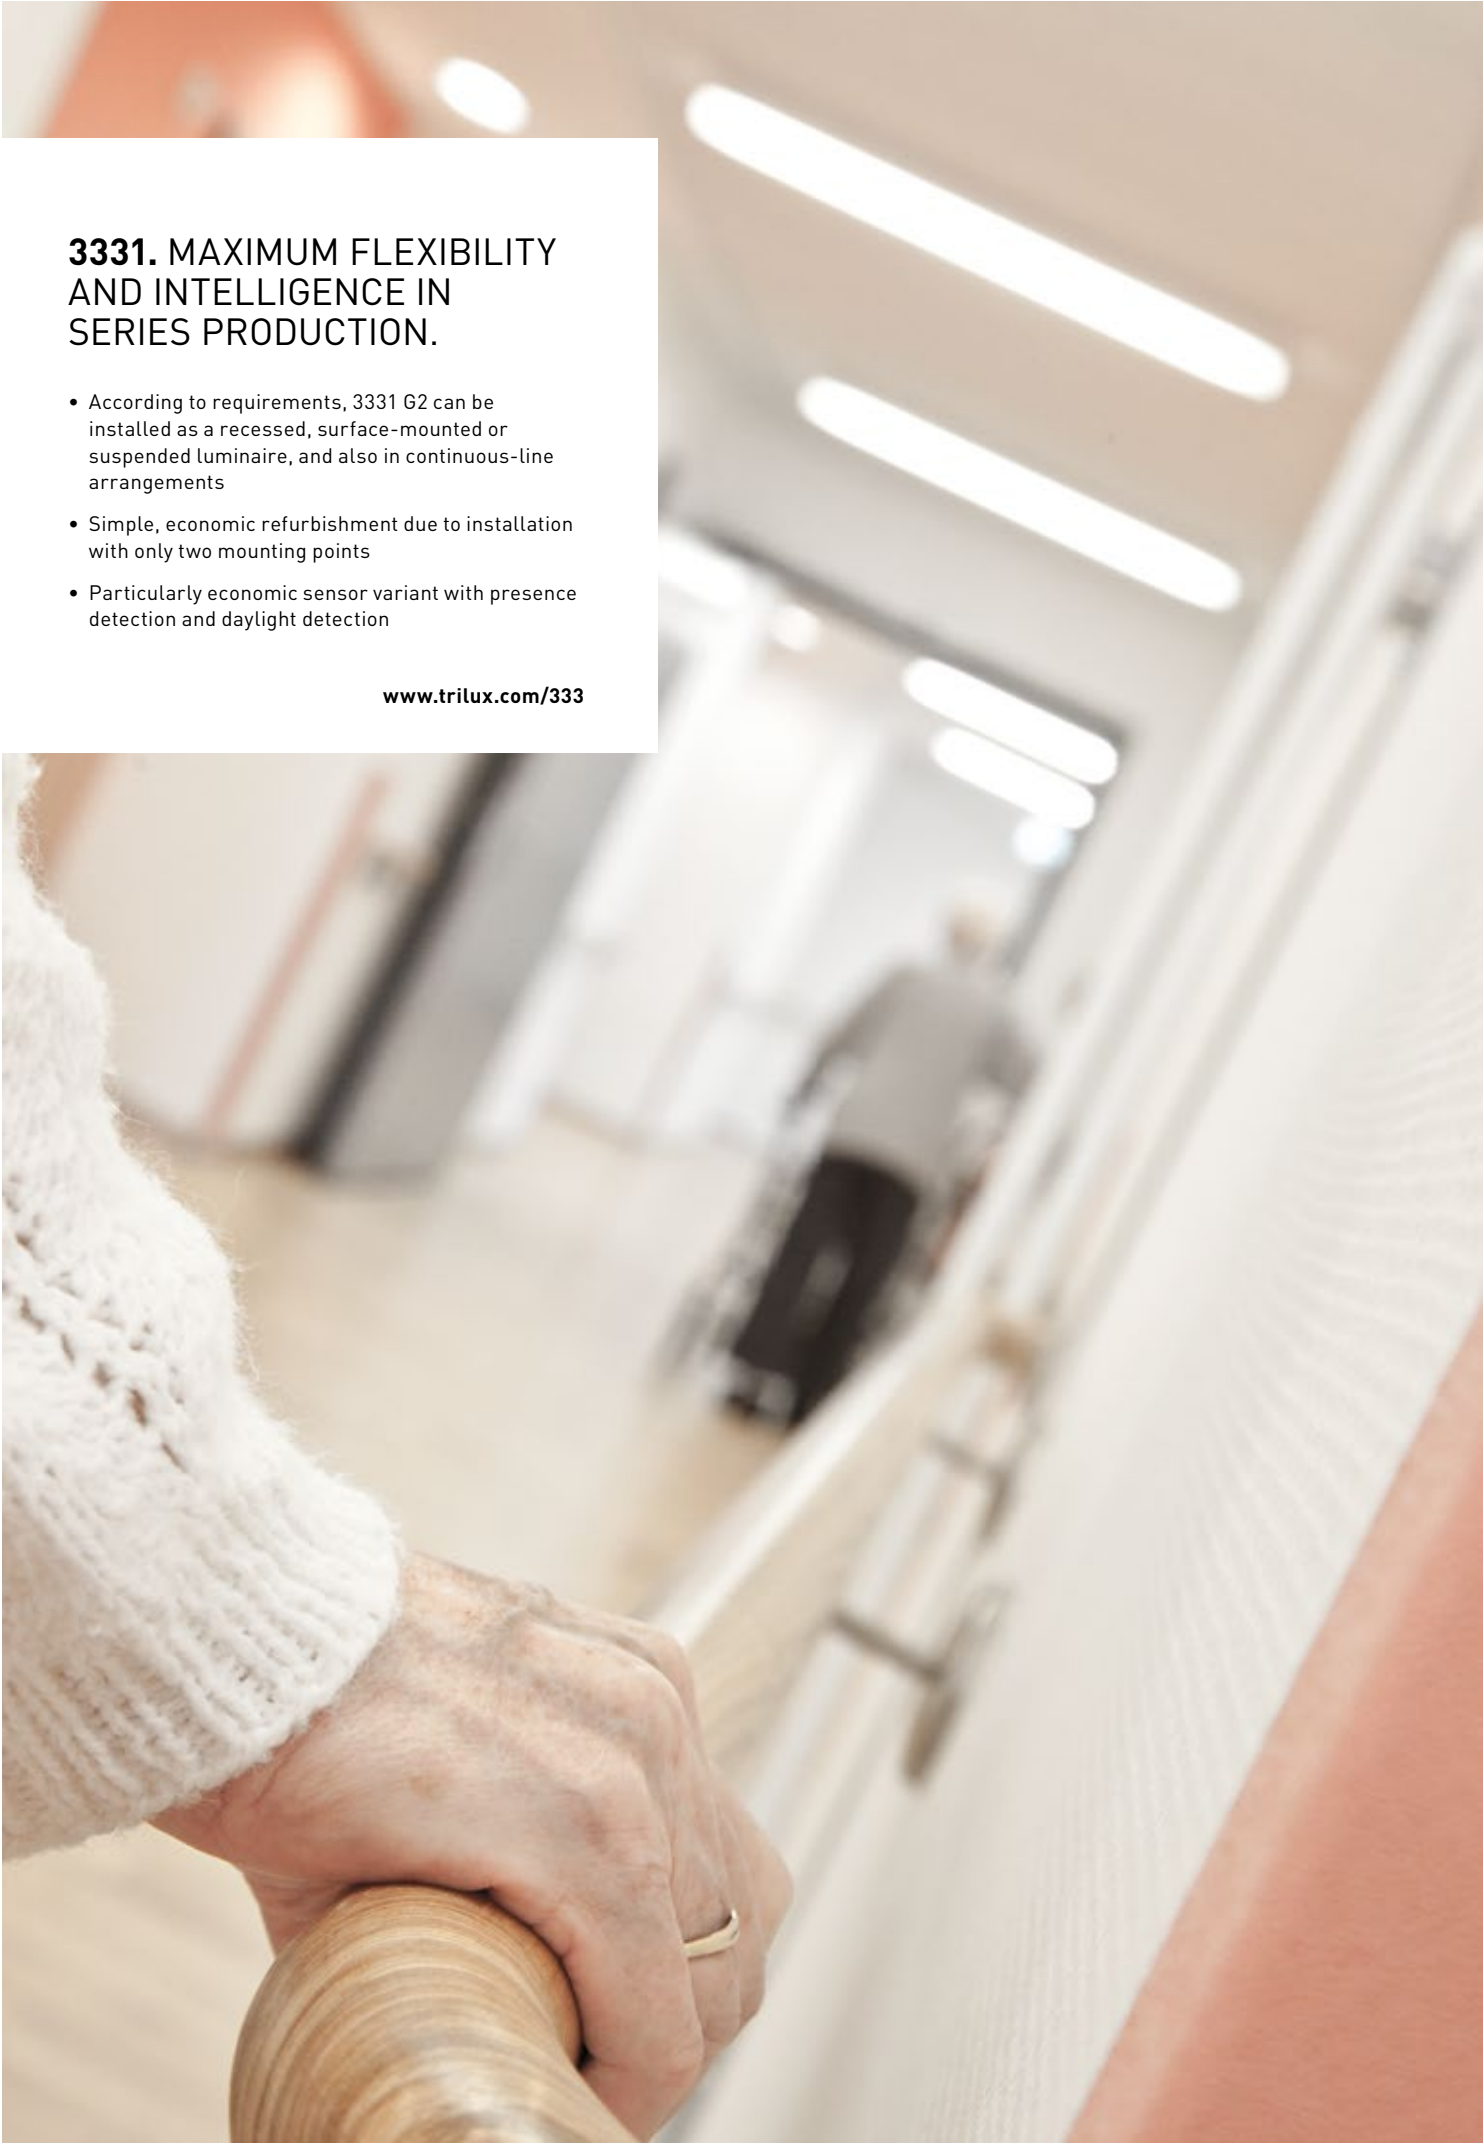

3331. MAXIMUM FLEXIBILITY AND INTELLIGENCE IN SERIES PRODUCTION.

- According to requirements, 3331 G2 can be installed as a recessed, surface-mounted or suspended luminaire, and also in continuous-line arrangements
- Simple, economic refurbishment due to installation with only two mounting points
- Particularly economic sensor variant with presence detection and daylight detection

www.trilux.com/333

Detailed product information:
www.trilux.com/333



3331 G2	
	Mounting type Recessed (via accessories) Surface-mounted Suspended (via accessories)
	Mounting location Ceiling
	Beam characteristic lambertian asymmetric wide
	Luminaire luminous flux 1,200 - 5,000 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K Tunable White 2,700 K – 6,500 K
	Service life L80 = 50,000 h
	Luminaire colour silver-grey white
	Operating mode switchable and DALI dimmable (ETDD) switchable (ET)
	Connectivity LiveLink integrated LiveLink WiFi integrated
	Additional equipment Motion sensor Single battery system, 3 hours
	Accessories Fixing accessories Infeed accessories for wire suspension Luminaire couplings Continuous-line couplings Wire suspensions Sensor remote control Trunking mountings Supply tubes for wire suspension

      IP50



3331

SURFACE-MOUNTED LUMINAIRES

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.