



BELVISO D. THE STANDARD FOR EFFICIENCY AND LIGHT AESTHETICS.

- Completely uniform illumination creates a feel-good atmosphere for workstations
- Exclusive light frame creates an unmistakable light aesthetics with a soft transition to the ceiling
- Coloured light guides enable individual lighting moods

www.trilux.com/belvisod

Detailed product information:
www.trilux.com/belvisod




Belviso D	
	Mounting type Surface-mounted
	Mounting location Ceiling
	Design square linear
	Beam characteristic wide
	Luminaire luminous flux 3,700 - 4,050 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K Tunable White 2,700 K – 6,500 K Further light colours on request
	Service life L80 = 70,000 h
	Luminaire colour white
	Operating mode switchable and DALI dimmable (ETDD) switchable (ET)
	Additional equipment with coloured light frame

     IP20

BELVISO D

SURFACE-MOUNTED LUMINAIRES

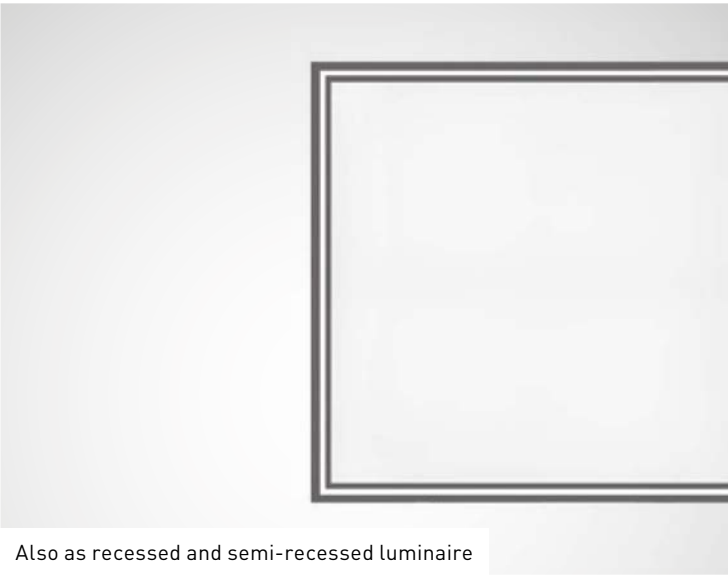

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.