



**MONDIA G3. FUNCTIONALITY
IN A TIMELESS DESIGN.**

- Rapid installation, low maintenance and energy efficiency
- Low investment costs with quick payback
- Flexible uses as ceiling or wall luminaire, in three diameters and three luminous flux packages – switchable and dimmable
- Equally ideal for office, education, health and care applications


www.trilux.com/mondia

Detailed product information:
www.trilux.com/mondia



Mondia G3	
	Mounting type Surface-mounted
	Mounting location Ceiling Wall
	Beam characteristic Lambertian
	Luminaire luminous flux 1,300 - 3,200 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K
	Service life L80 = 50,000 h
	Luminaire colour White
	Operating mode Switchable and DALI dimmable (ETDD) Switchable (ET)
	Additional equipment Motion sensor Single battery system, 3 hours
	Accessories Decorative attachments

CE UK   IP40

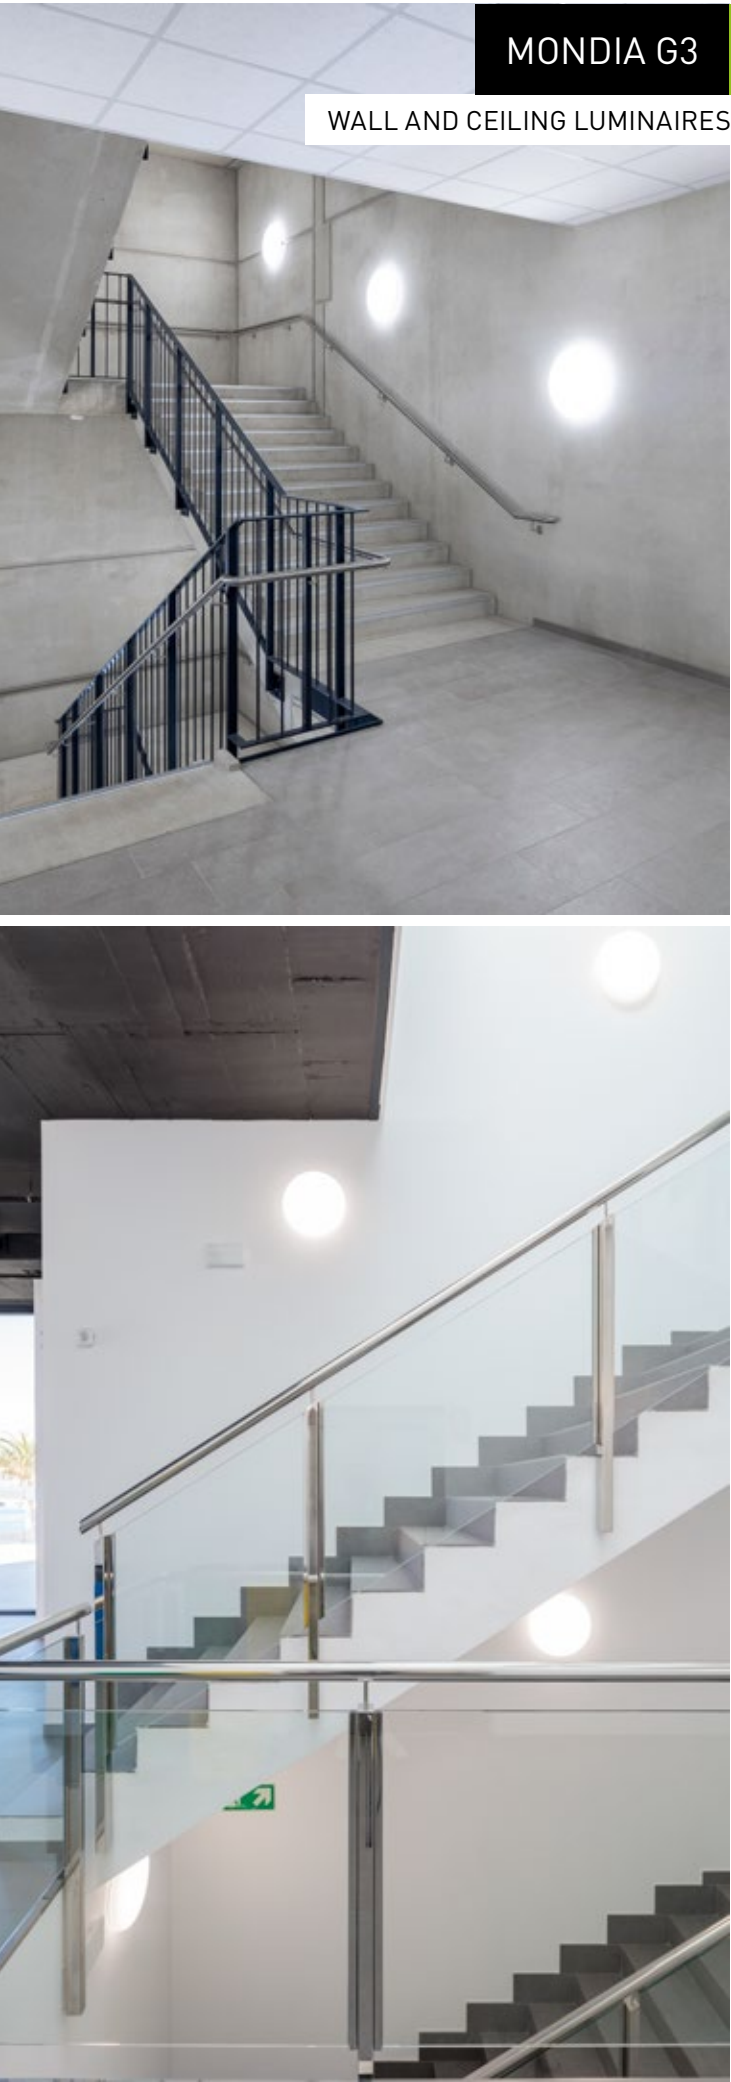

MONDIA G3

WALL AND CEILING LUMINAIRES

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.