

SUSPENDED LUMINAIRES










Also available as recessed and surface-mounted version

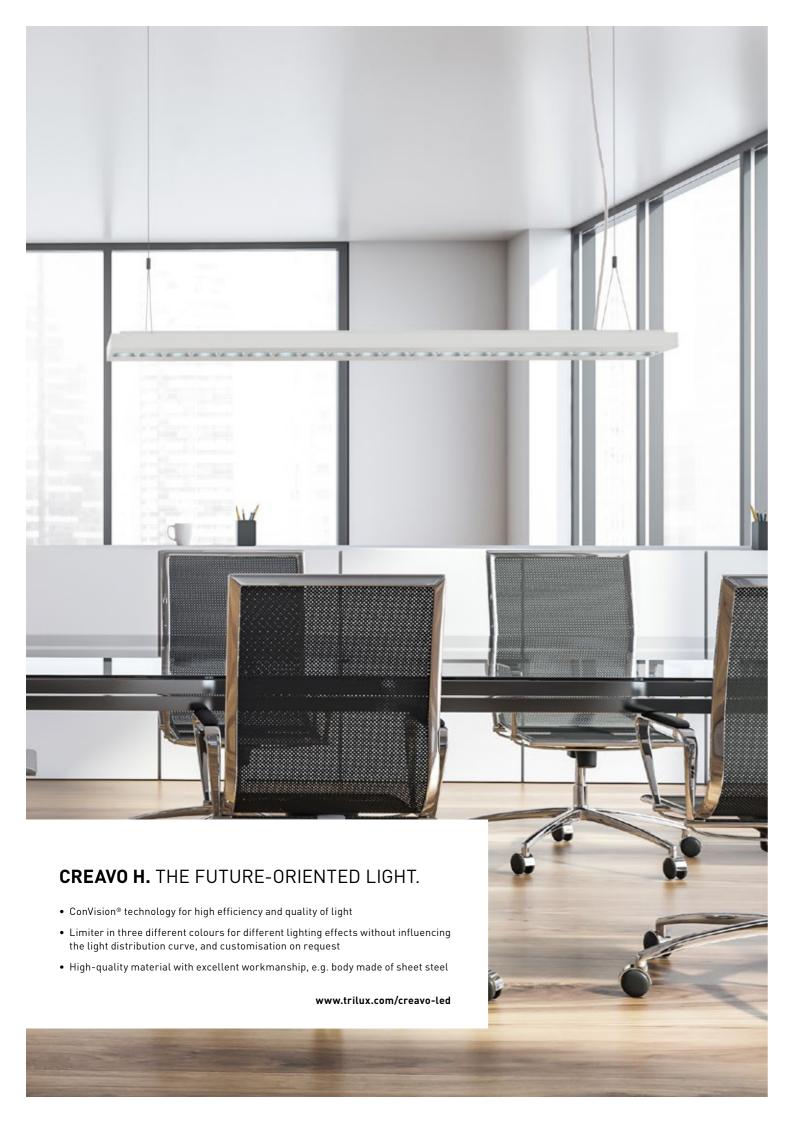

Creavo H

✗ Mounting type Suspended

& Mounting location Ceiling

Size

linear

Beam characteristic wide (also in UGR16) direct-indirect

 Luminaire luminous flux 4,600 - 8,900 lm

Octour rendering index | Light colour Ra > 80, Ra > 90

3,000 K 4,000 K

Tunable White 2,700 K – 6,500 K

L90 = 50,000 h L80 = 90,000 h

Service life

C Luminaire colour white with anthracite limiter white with white limiter white with black limiter

Uperating mode switchable and DALI dimmable (ETDD) switchable (ET)

(()) Connectivity LiveLink integrated Casambi capable

🌣 Additional equipment LiveLink Sensor IR Micro for

daylight-dependent control and presence detection Single battery system, 3 hours Beacon for location-based services

Accessories

End caps without function Continuous-line couplings Ceiling roses Ceiling roses with LiveLink Wire suspensions Connection cables Through-wirings



CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43