


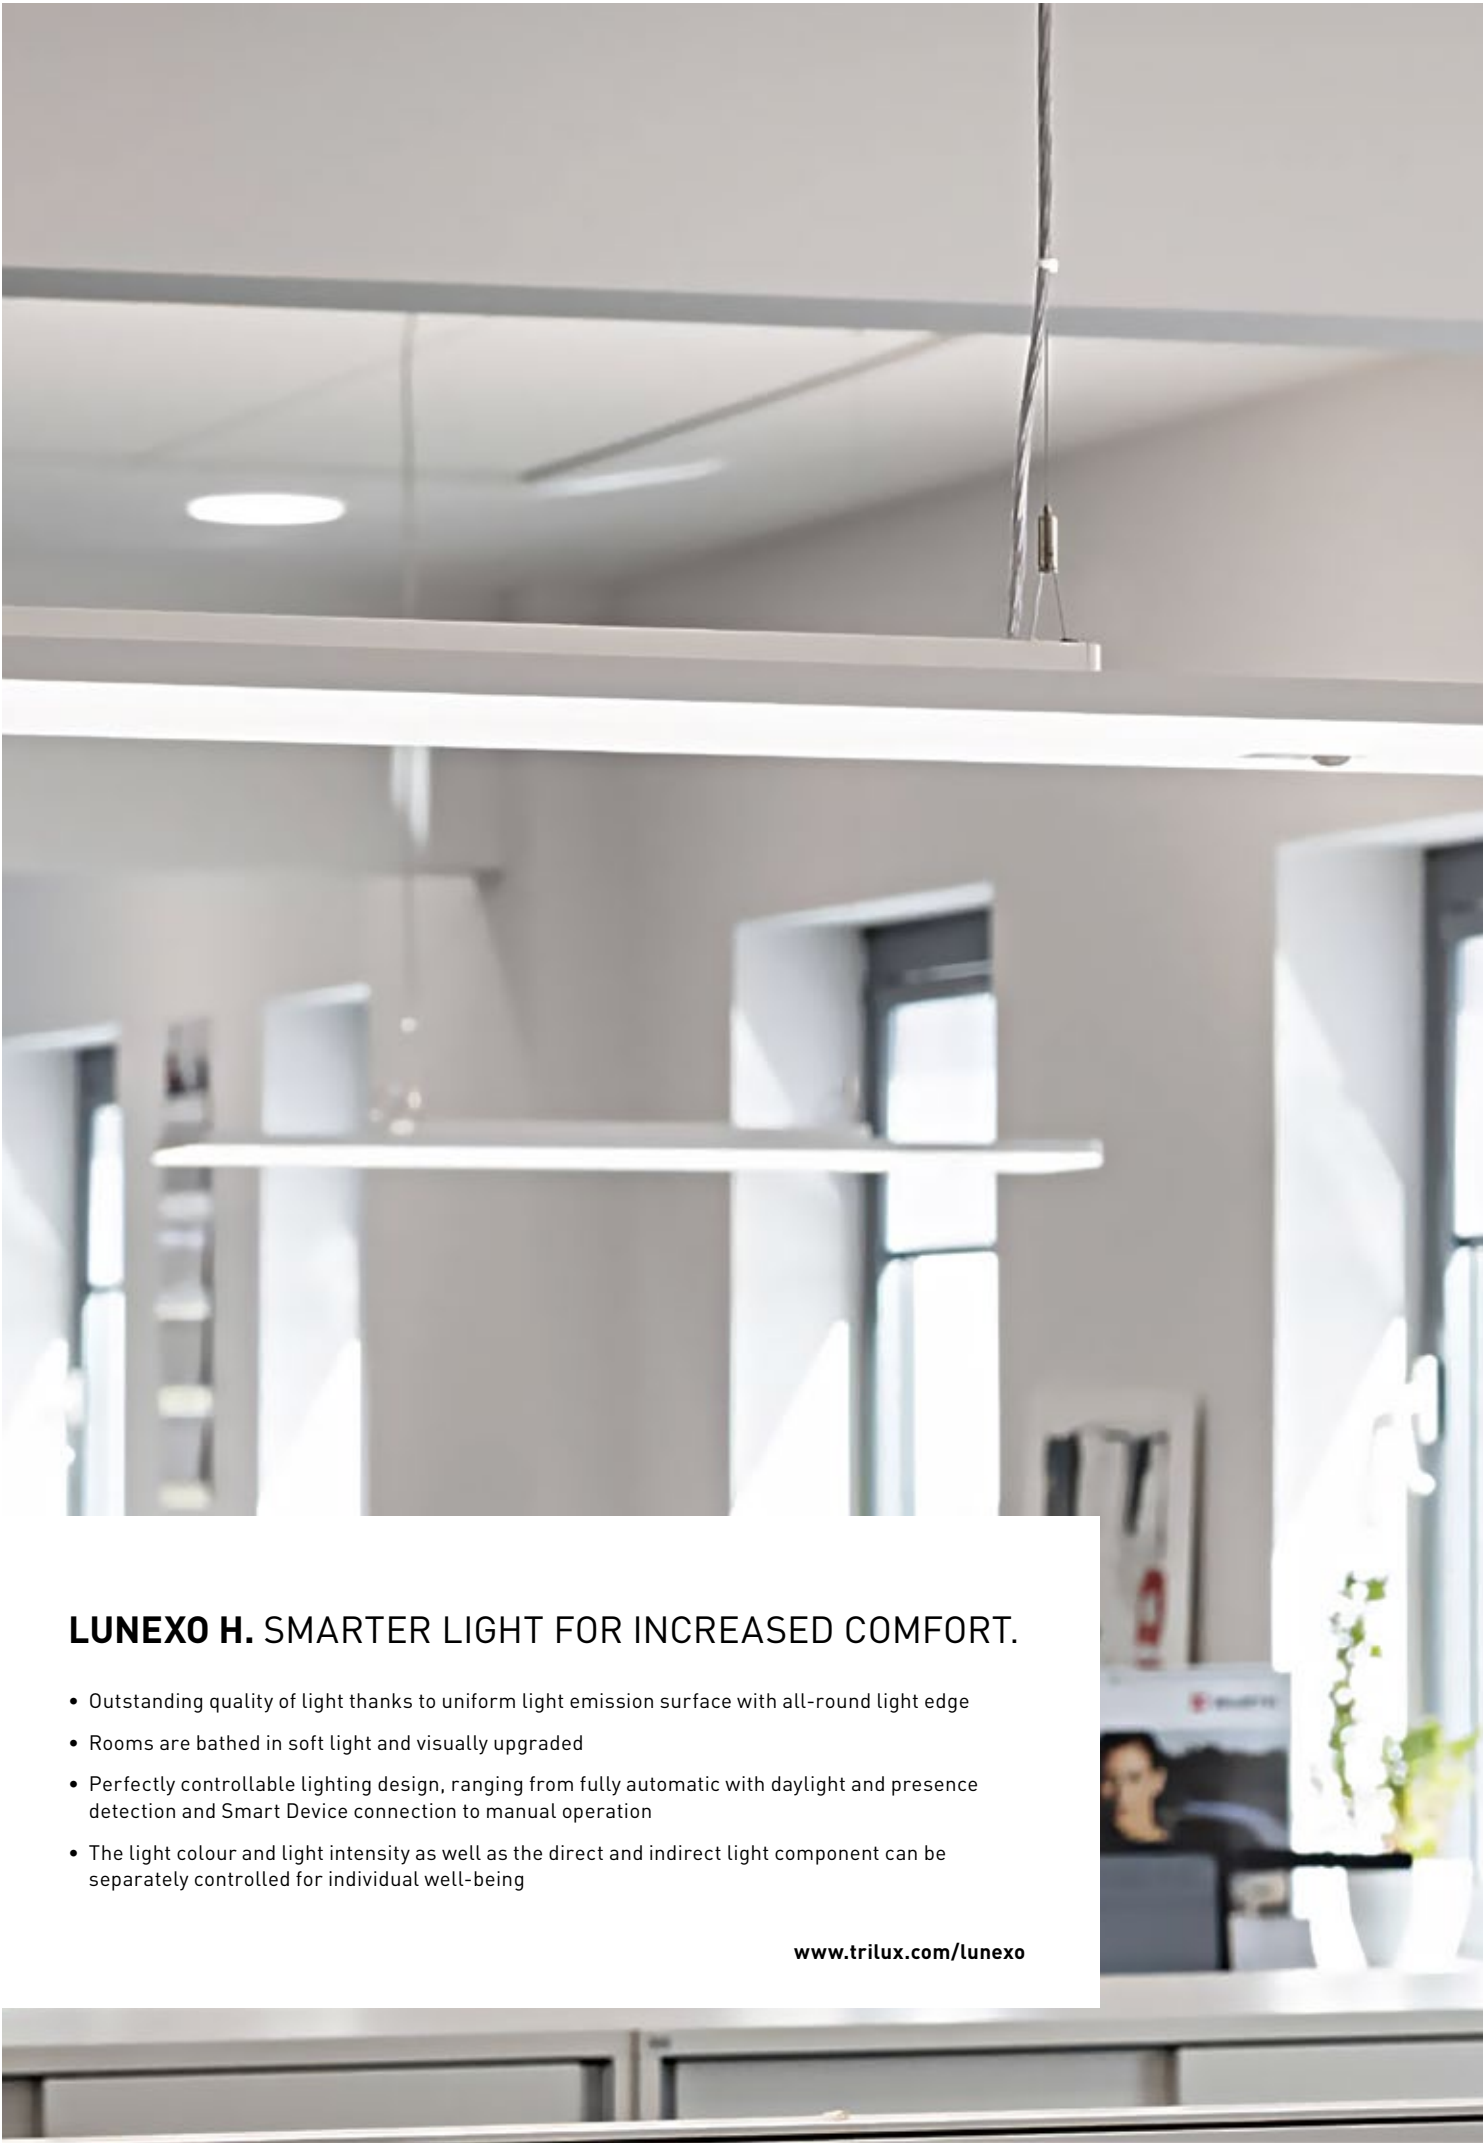

LUNEXO H. SMARTER LIGHT FOR INCREASED COMFORT.


- Outstanding quality of light thanks to uniform light emission surface with all-round light edge
- Rooms are bathed in soft light and visually upgraded
- Perfectly controllable lighting design, ranging from fully automatic with daylight and presence detection and Smart Device connection to manual operation
- The light colour and light intensity as well as the direct and indirect light component can be separately controlled for individual well-being

www.trilux.com/lunexo

Detailed product information:
www.trilux.com/lunexo



Lunexo H	
	Mounting type Suspended
	Mounting location Ceiling
	Size linear
	Beam characteristic wide direct-indirect
	Luminaire luminous flux 6,500 - 8,800 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K Tunable White 2,700 K – 6,500 K
	Service life L80 = 70,000 h
	Luminaire colour silver-grey white
	Operating mode switchable and DALI dimmable (ETDD)
	Connectivity LiveLink integrated Casambi capable
	Additional equipment LiveLink sensor IR Micro for daylight-dependent control and presence detection
	Accessories Ceiling roses Ceiling roses with LiveLink

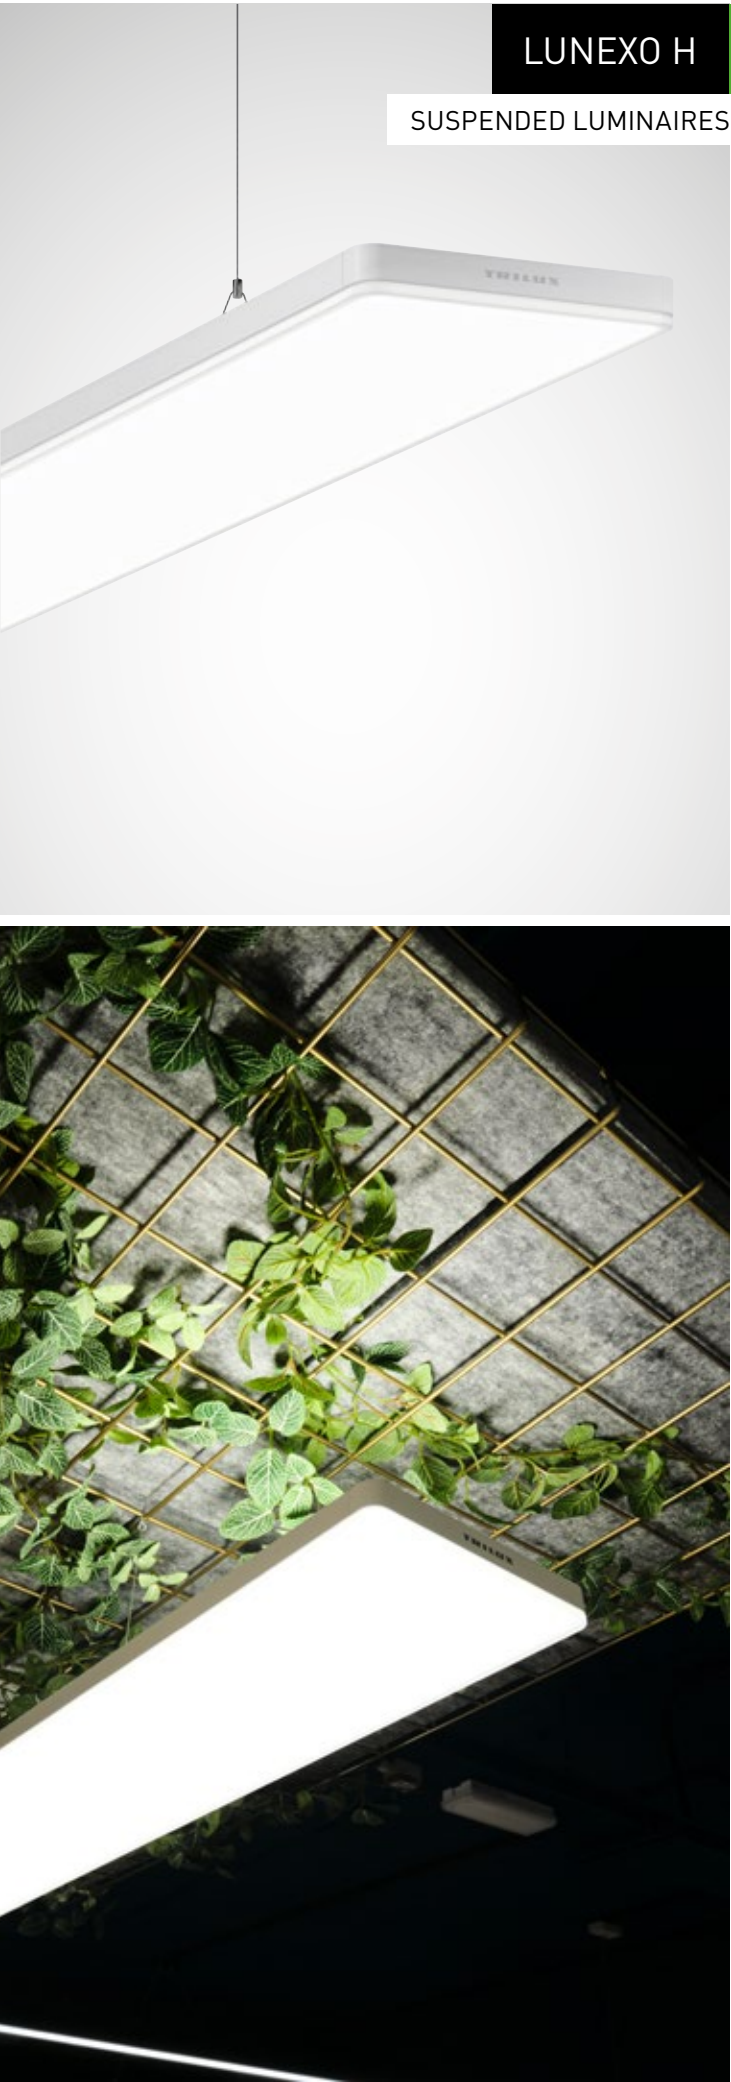

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.