



ACTISON FIT



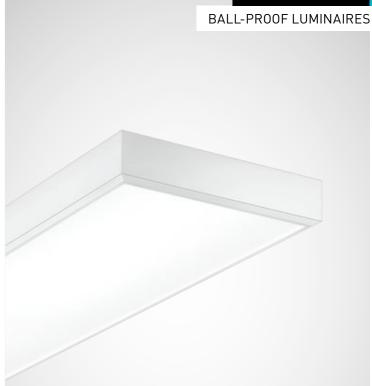



Mounting type Suspended

Surface-mounted Recessed

& Mounting location Ceiling

🚡 Beam characteristic wide

Luminaire luminous flux 9,300 - 20,000 lm

Ra > 80 Ra > 90 4,000 K

① Service life L80 (tq 35 °C) = 100,000 h

C Luminaire colour white

('j') Connectivity
LiveLink integrated
Monitoring Ready

Accessories
Ball safety shield Through-wiring Suspensions Recessing accessory Mounting accessories






ACTISON FIT. THE COMPETITIVE ATHLETE AMONG SPORTS

• A broad portfolio of luminous flux packages, sizes and mounting methods for all common sports halls

• Homogeneous light, high colour rendering, excellent glare control and uniformity, no flicker

HALL LUMINAIRES.

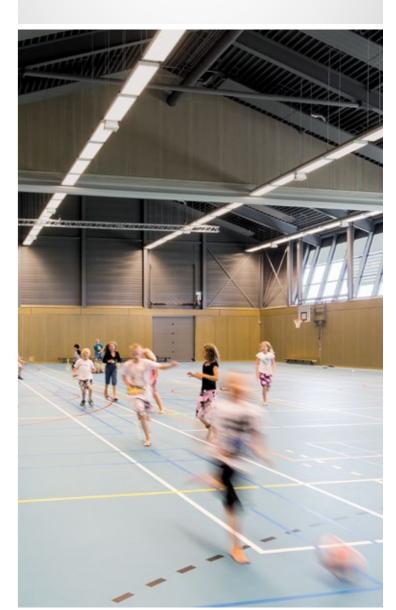

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43