



DEVEO FIT. A ROBUST WEATHER-PROOF ENTRY-LEVEL LED LUMINAIRE.

- Ideal for quick installation, with easy replacement of many conventional weather-proof luminaires thanks to maximum flexibility when attaching the fixing clips
- Intuitive quick connection system for maximum time savings during installation
- Basic solution with low investment and operating costs
- Gas-resistant solutions for more demanding applications available in the portfolio
- PMMA versions enable use in aggressive environments with gases and vapours, and ensure robustness when treated with cleaning agents

www.trilux.com/deveo



Detailed product information:
www.trilux.com/deveo




Deveo Fit	
	Mounting type Suspended Surface-mounted
	Mounting location Ceiling Wall Outdoor wall, canopied Outdoor ceiling Outdoor, not canopied (IP69K)
	Beam characteristic lambertian
	Luminaire luminous flux 2,100 - 6,000 lm
	Colour rendering index Light colour Ra > 80 4,000 K
	Service life L80 = 50,000 h
	Luminaire colour light grey
	Operating mode switchable and DALI dimmable (ETDD) switchable (ET)
	Additional equipment Through-wiring IP69K
	Accessories Mounting accessories

   IP66 IP69K

DEVEO FIT

LUMINAIRES WITH HIGHER PROTECTION RATING

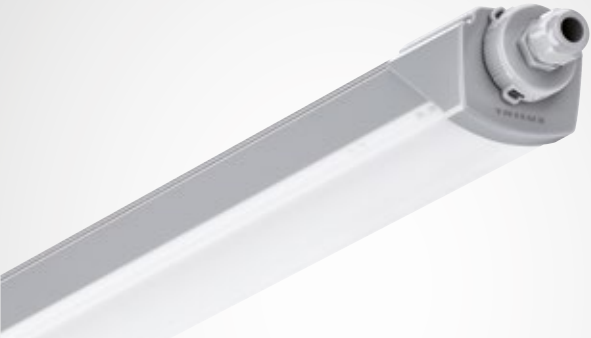

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.