



DUROXO G2. GAS-RESISTANT SOLUTION FOR SPECIAL AREAS.

- Gas-resistant lighting solution for use in gaseous or solvent-containing atmospheres as caused by sulphur fumes or ammonia fumes
- Ideal for e.g. tyre warehouses, non-canopied outdoor areas and special industrial areas
- Extremely long service life of 100,000 h (L80 at tq 35°C)
- Robust PMMA housing, protection rating IP69K, extremely high impact resistance

www.trilux.com/duroxo-led

Detailed product information:
www.trilux.com/duroxo-led




Duroxo G2	
	Mounting type Surface-mounted Suspended
	Mounting location Wall Ceiling Outdoor wall, canopied Outdoor ceiling Outdoor, not canopied
	Beam characteristic wide
	Luminaire luminous flux 6,700 lm
	Colour rendering index Light colour Ra > 80 4,000 K
	Operating mode switchable and DALI dimmable (ETDD) switchable (ET)
	Accessories Fixing accessories

    IP69K

DUROXO G2

LUMINAIRES WITH HIGHER PROTECTION RATING

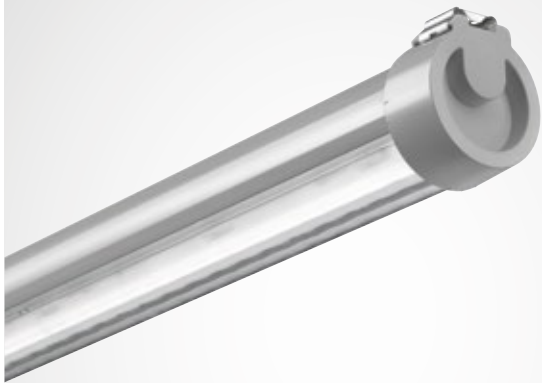

Completely gas-tight lighting solution

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.