





### Mounting type

Surface-mounted Suspended

### & Mounting location

Ceiling

# 🚡 Beam characteristic

wide narrow

## Luminaire luminous flux

15,000 - 35,000 lm

### -Ò- Colour rendering index | Light colour

Ra > 80 4,000 K 6,500 K

Service life
L80 (tq 50 °C) = 70,000 h

# **○** Luminaire colour

white

• Operating mode switchable and DALI dimmable (ETDD) switchable (ET)


## ((j)) Connectivity

Monitoring ready Smart lighting ready

# Accessories

Fixing hardware Fixing bracket Chains Reflectors

# 

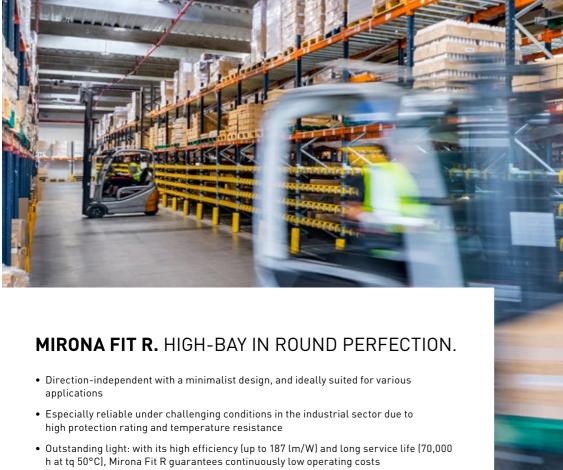

www.trilux.com/mirona-fit-led



# **CONTACTS**

### TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

### SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43