




Complete range, also available as bollard luminaires

8841 LS. AN ELEGANT LIGHT COLUMN FOR PRESTIGIOUS TASKS.

- On the slender light column, the transitions between supporting column and luminaire head are hardly visible
- \bullet Thanks to innovative MLT $^{\rm IQ}$ technology, the light effects can be individually adapted to on-site needs via the light distribution properties
- The light column is optionally available with a height of 2.60 m or 3.60 m
- The 8841 LS is part of an overall product range also containing bollards and wall solutions
- A version with continuous underground support provides additional protection from vandalism

www.trilux.com/8841LS

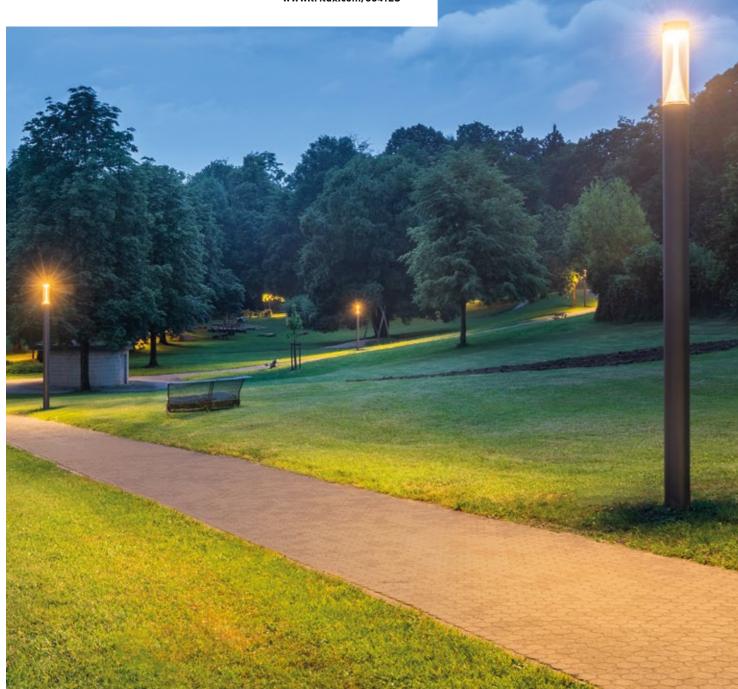

8841 LS

Mounting type
Outdoor free-standing mounting

Mounting location
Outdoor ground

Beam characteristic asymmetric wide rotationally symmetric wide

 Luminaire luminous flux 1,000 - 3,500 lm

-Ò: Colour rendering index | Light colour Ra > 70 3,000 K 4,000 K

Service life L80 = 80,000 h

○ Luminaire colour anthracite

Operating mode switchable (ET)

Accessories Underground supports

C € K □ IP65

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43