


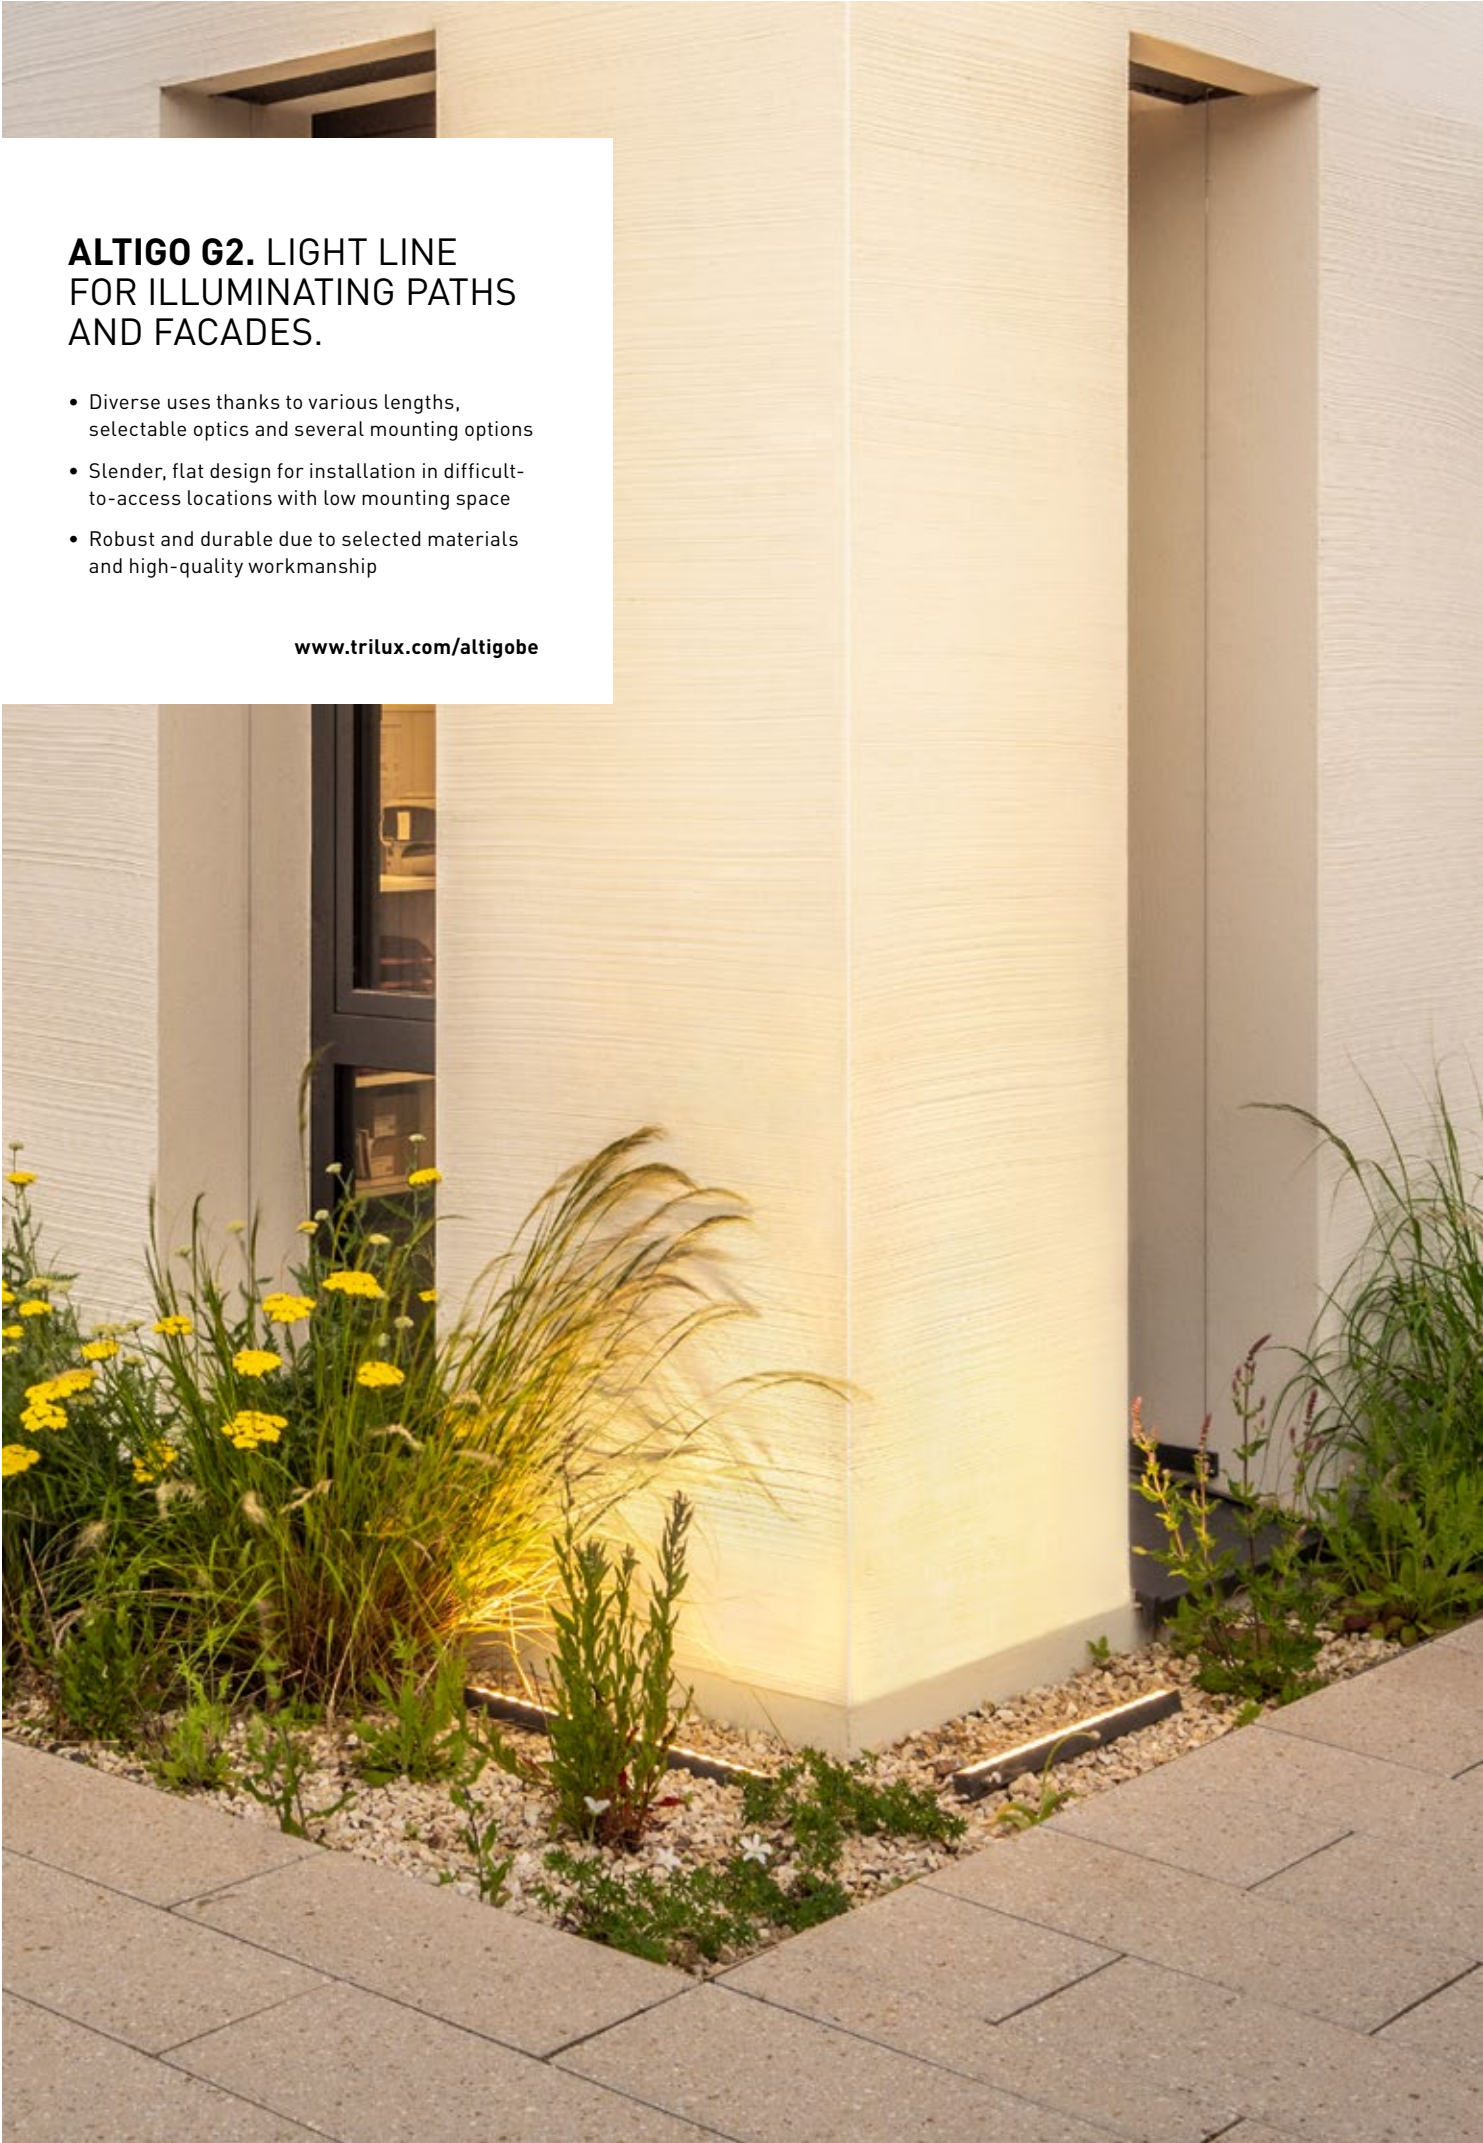

ALTIGO G2. LIGHT LINE
FOR ILLUMINATING PATHS
AND FACADES.

- Diverse uses thanks to various lengths, selectable optics and several mounting options
- Slender, flat design for installation in difficult-to-access locations with low mounting space
- Robust and durable due to selected materials and high-quality workmanship

www.trilux.com/altigobe

Detailed product information:
www.trilux.com/altigobe



Altigo G2	
	Mounting type Outdoor ground-recessed
	Mounting location Outdoor ground
	Beam characteristic asymmetric medium-wide rotationally symmetric wide rotationally symmetric narrow rotationally symmetric medium wide symmetric narrow
	Luminaire luminous flux 350 - 4,000 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K
	Service life L80 = 50,000 h
	Luminaire colour anthracite
	Accessories Connection sockets Control units Mounting enclosure

CE UK IP67




ALTIGO G2

GROUND-RECESSED LUMINAIRES



Mounting enclosure

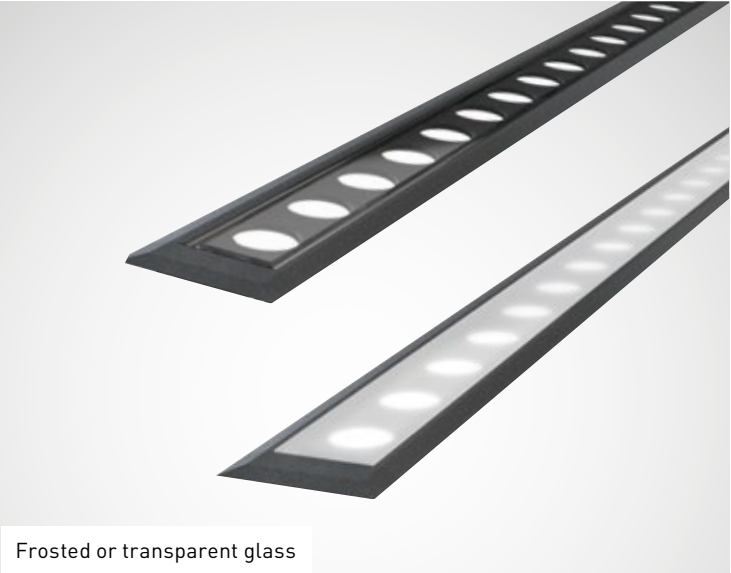

Frosted or transparent glass

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.