



OSIDO

LIGHT UP THE DARK SIDE

OSIDO. LIGHT UP THE DARK SIDE.

- Thanks to a minimalist, modern design and an intelligent housing concept without visible screws, the luminaires blend harmoniously into the overall picture
- With their innovative mounting system, Osido luminaires can be conveniently installed by one person via Plug & Play
- Application-specific MLT¹⁰ optics direct the light only to where it is needed

www.trilux.com/osido

Detailed product information:
www.trilux.com/osido




Osido	
	Mounting type Surface-mounted
	Mounting location Outdoor wall
	Design square rectangular round oval
	Cover Frosted glass PMMA diffuser
	Beam characteristic wide wide-wide wide-narrow narrow narrow-narrow
	Luminaire luminous flux up to 4,000 lm
	Colour rendering index Light colour Ra > 80 2,700 K 3,000 K 4,000 K
	Service life L80 = 50,000 h
	Luminaire colour anthracite also available in special colours on request
	Operating mode switchable and DALI dimmable (ETDD) Bluetooth Low Energy (ETBLE) switchable (ET)
	Connectivity Casambi capable
	Additional equipment Emergency light monitoring modules

CE UK IP65

OSIDO

WALL AND CEILING LUMINAIRES

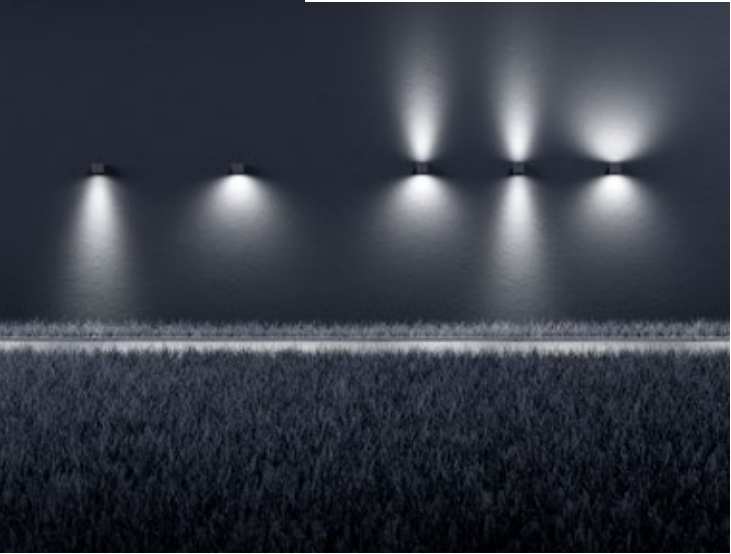

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.