



SKEO PURA. FLAT SQUARES FOR ATTRACTIVE FACADE LIGHTING.

- A flat design in a square shape for illuminating prestigious facades
- Resistant against dust and water jets with IP65 protection rating due to coated die-cast aluminium body
- The uniformly illuminated cover panel generates pleasant, atmospheric light – ideal for prestigious areas


www.trilux.com/skeopura

Detailed product information:
www.trilux.com/skeopura



Skeo Pura	
	Mounting type Surface-mounted
	Mounting location Outdoor wall Outdoor ceiling
	Beam characteristic Lambertian
	Luminaire luminous flux 500 - 1,650 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K
	Service life L80 = 50,000 h
	Luminaire colour anthracite
	Operating mode switchable (ET)
	Accessories House number labelling Accessory frames

CE UK IP65

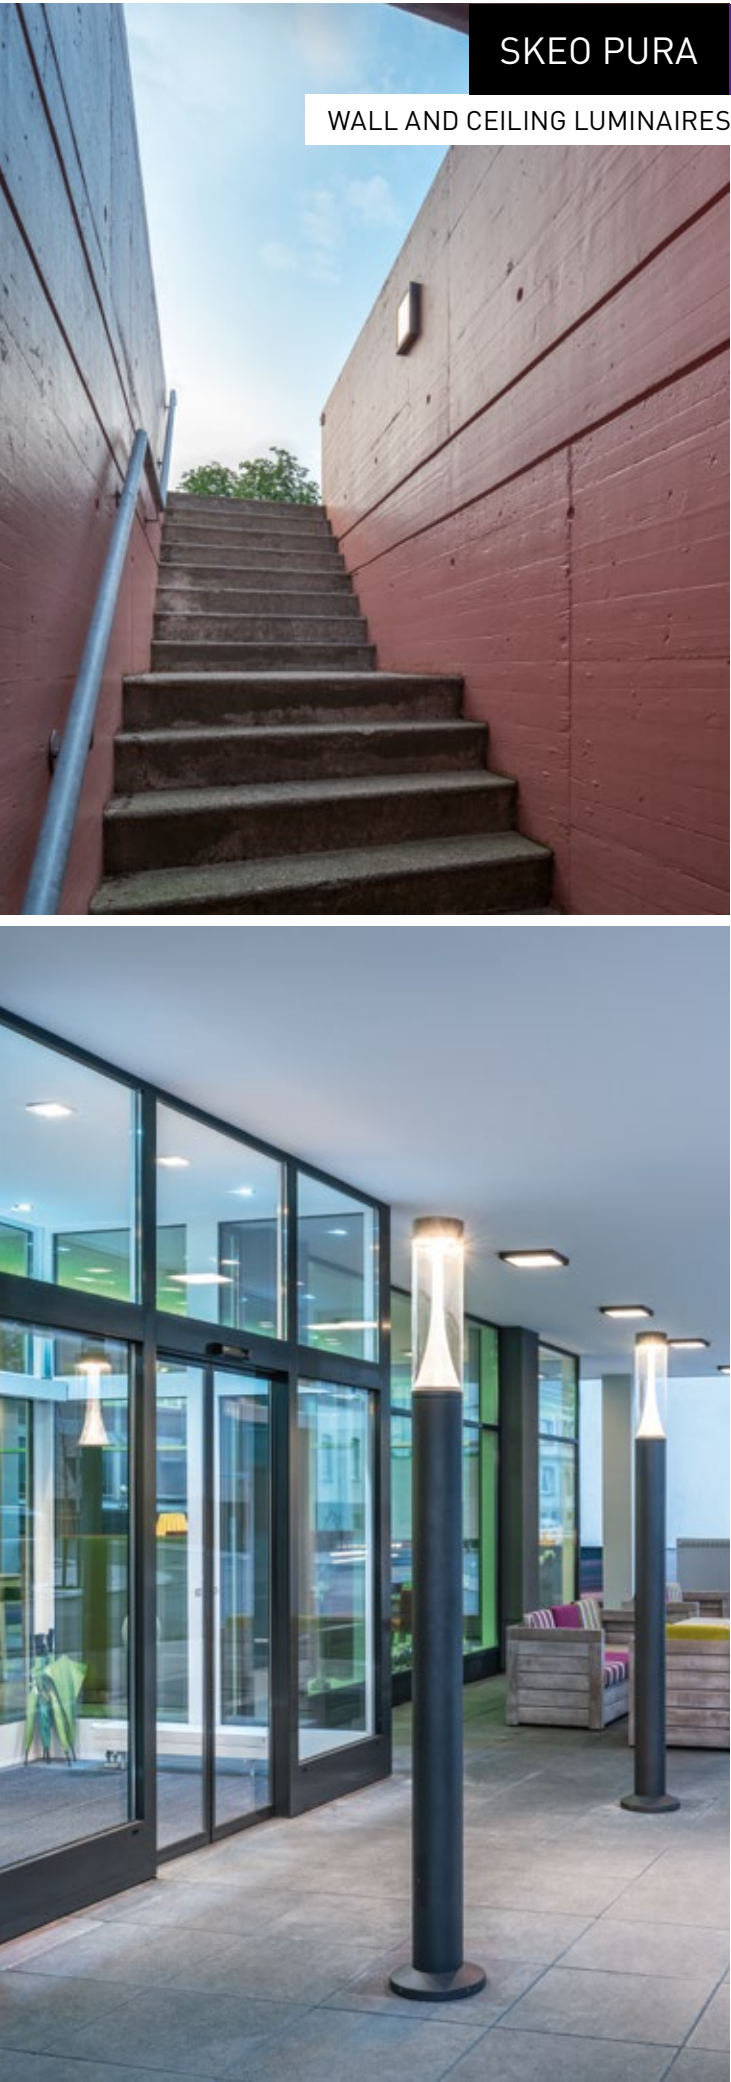

SKEO PURA

WALL AND CEILING LUMINAIRES

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.