


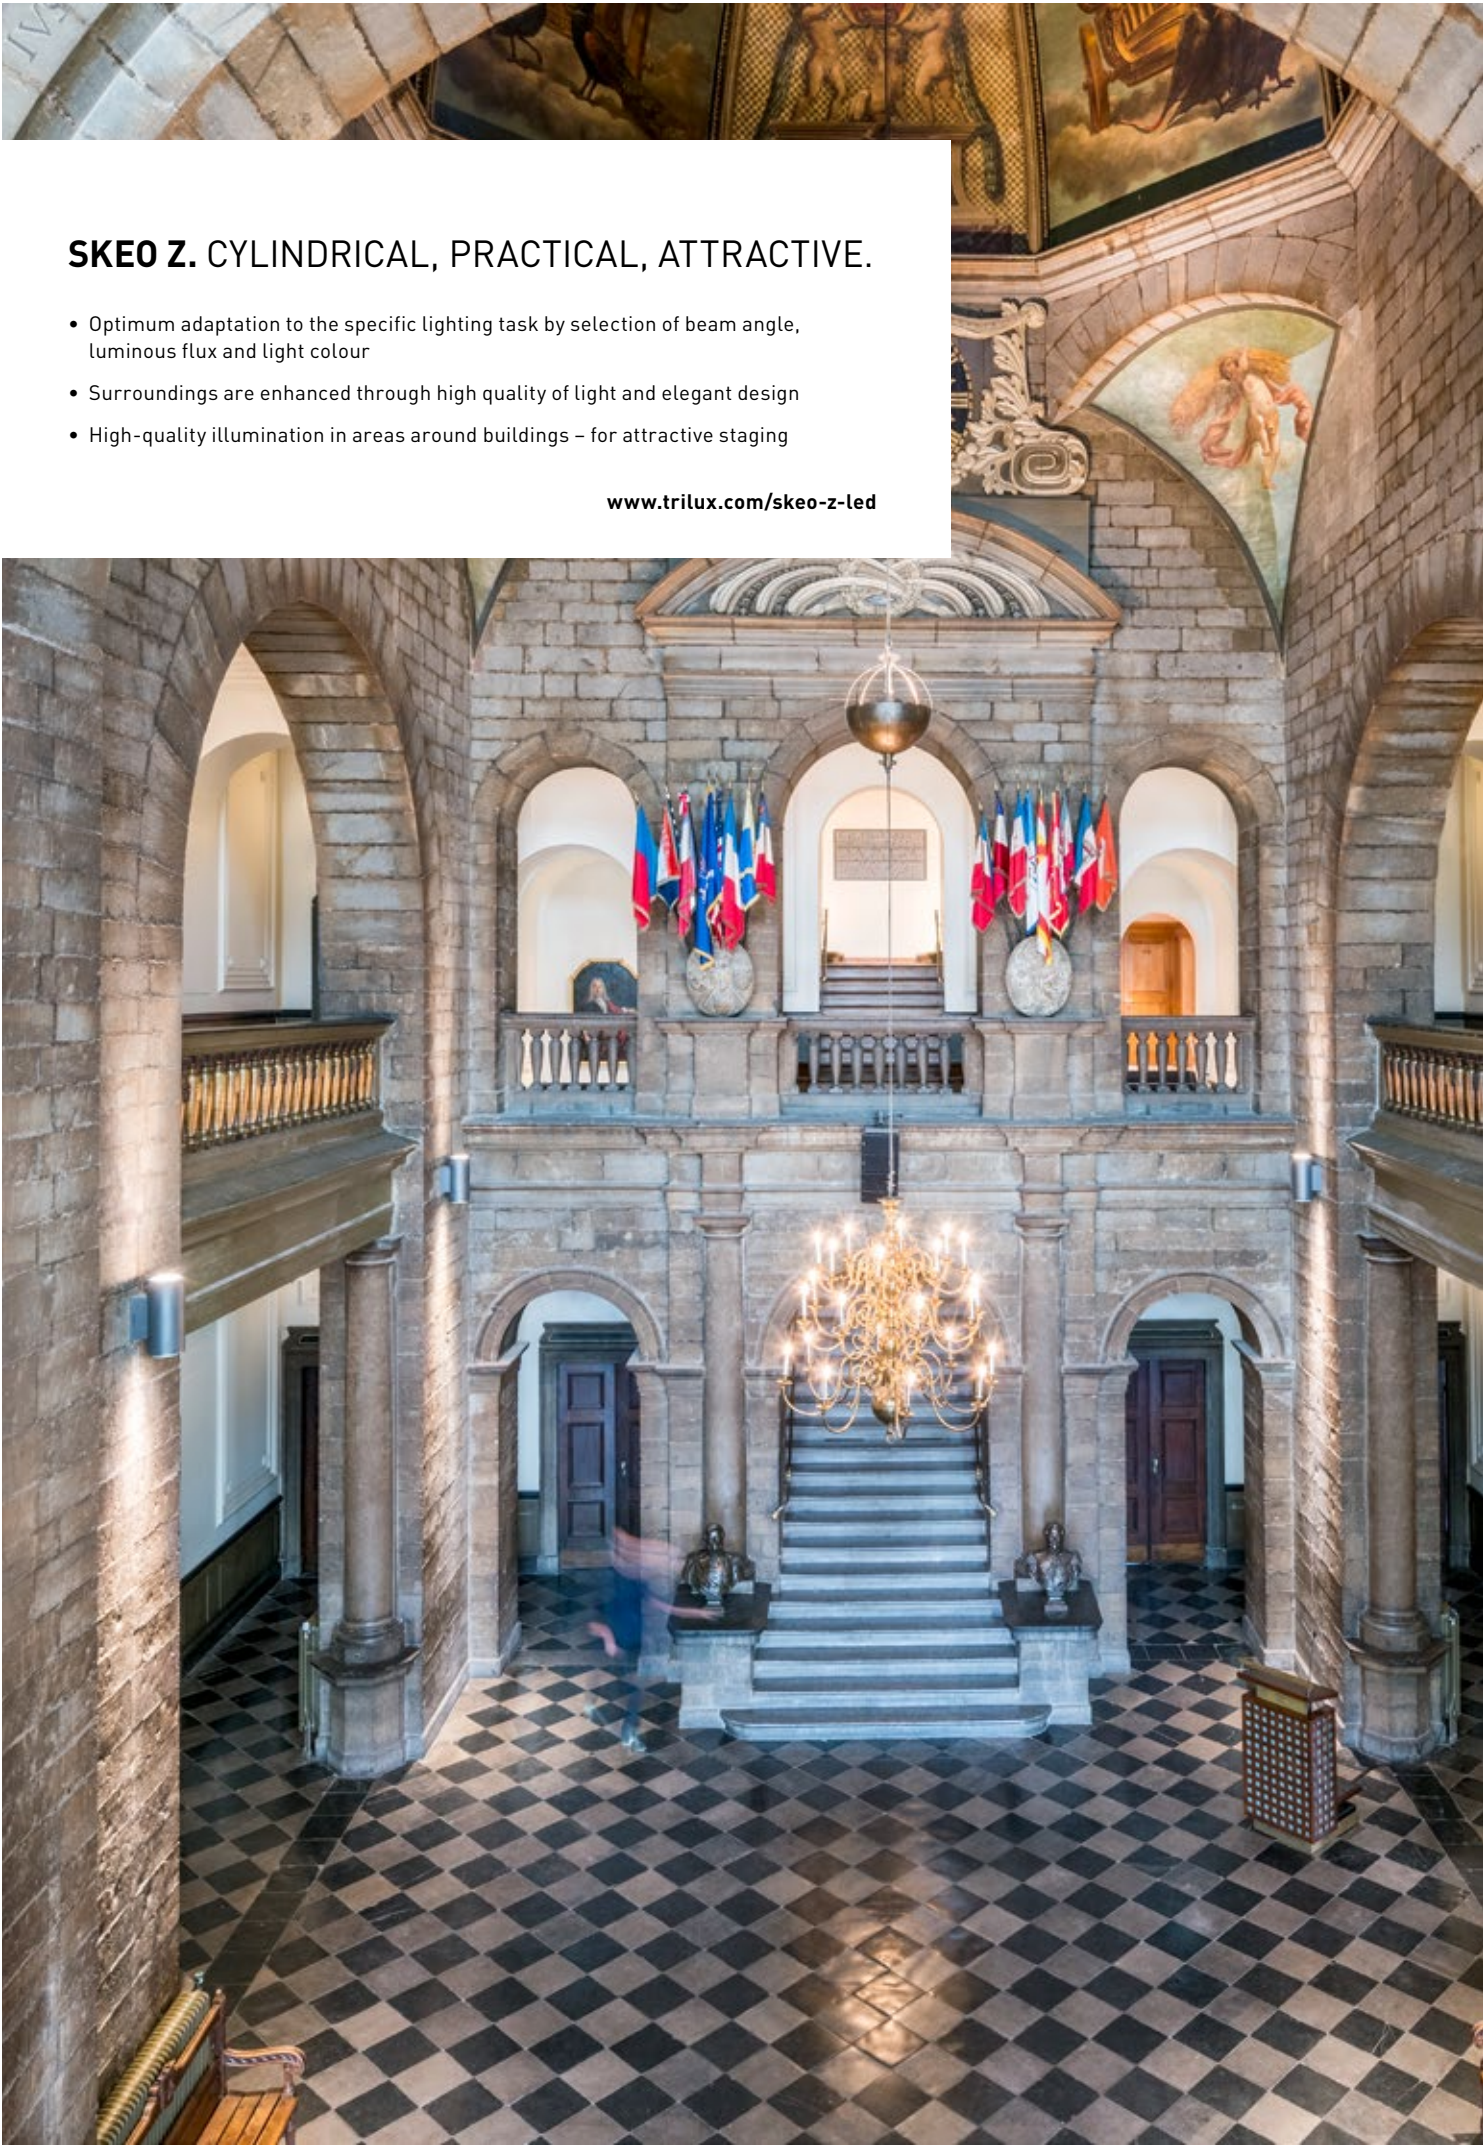

SKEO Z. CYLINDRICAL, PRACTICAL, ATTRACTIVE.

- Optimum adaptation to the specific lighting task by selection of beam angle, luminous flux and light colour
- Surroundings are enhanced through high quality of light and elegant design
- High-quality illumination in areas around buildings – for attractive staging

www.trilux.com/skeo-z-led

Detailed product information:
www.trilux.com/skeo-z-led



SKEO Z

WALL AND CEILING LUMINAIRES

Skeo Z

Mounting type
Surface-mounted

Mounting location
Outdoor wall

Beam characteristic
rotationally symmetric wide
rotationally symmetric narrow

Luminaire luminous flux
500 - 2,000 lm

Colour rendering index | Light colour
Ra > 80
3,000 K
4,000 K

Service life
L80 = 50,000 h

Luminaire colour
anthracite

Operating mode
switchable (ET)

CE UK IP65

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.