


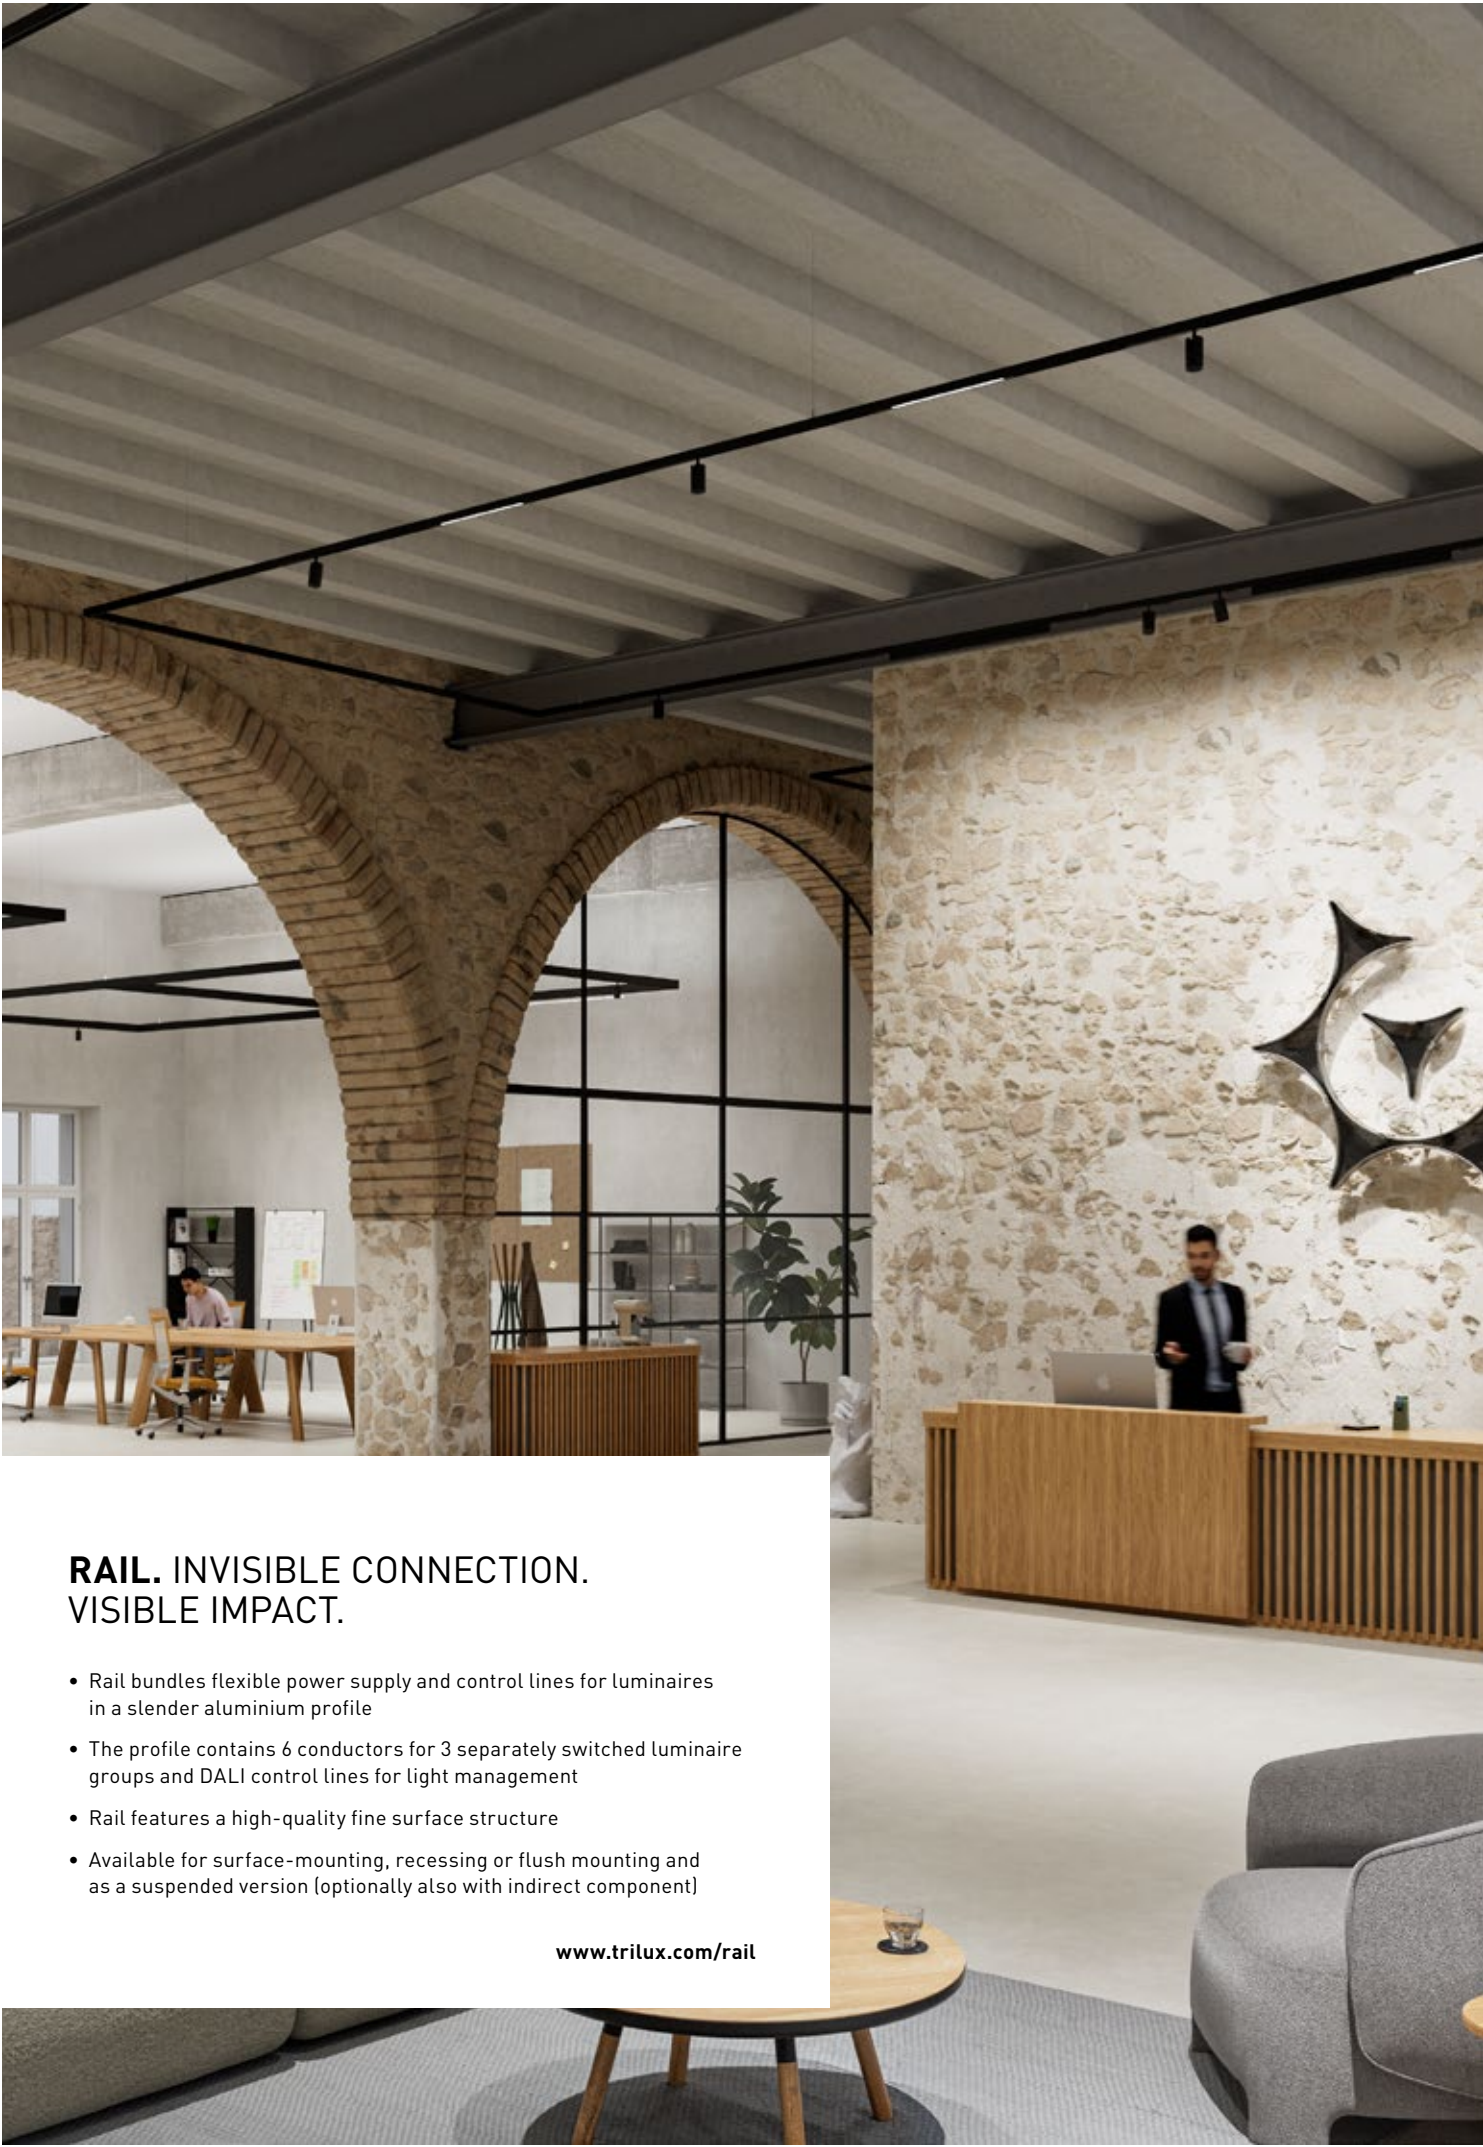

**RAIL. INVISIBLE CONNECTION.
VISIBLE IMPACT.**


- Rail bundles flexible power supply and control lines for luminaires in a slender aluminium profile
- The profile contains 6 conductors for 3 separately switched luminaire groups and DALI control lines for light management
- Rail features a high-quality fine surface structure
- Available for surface-mounting, recessing or flush mounting and as a suspended version (optionally also with indirect component)

www.trilux.com/rail

Detailed product information:
www.trilux.com/rail



Rail	
	Mounting type Surface-mounted Recessed Flush-mounted Suspended
	Length <u>Surface-mounted Recessed </u> <u>Flush-mounted</u> 1,000 mm 2,000 mm 3,000 mm 4,000 mm <u>Suspended</u> 1,405 mm 1,500 mm with feeder 2,810 mm 2,905 mm with feeder
	Mounting location Ceiling
	Track colour white black further colours on request
	Operating mode switchable and DALI dimmable (ETDD)
	Accessories Covers Fixing accessories Blanking covers Ceiling roses Sealings Feed-in accessories End caps Couplings Mounting accessories Pendant suspensions Wire suspensions Track connector Sealing caps

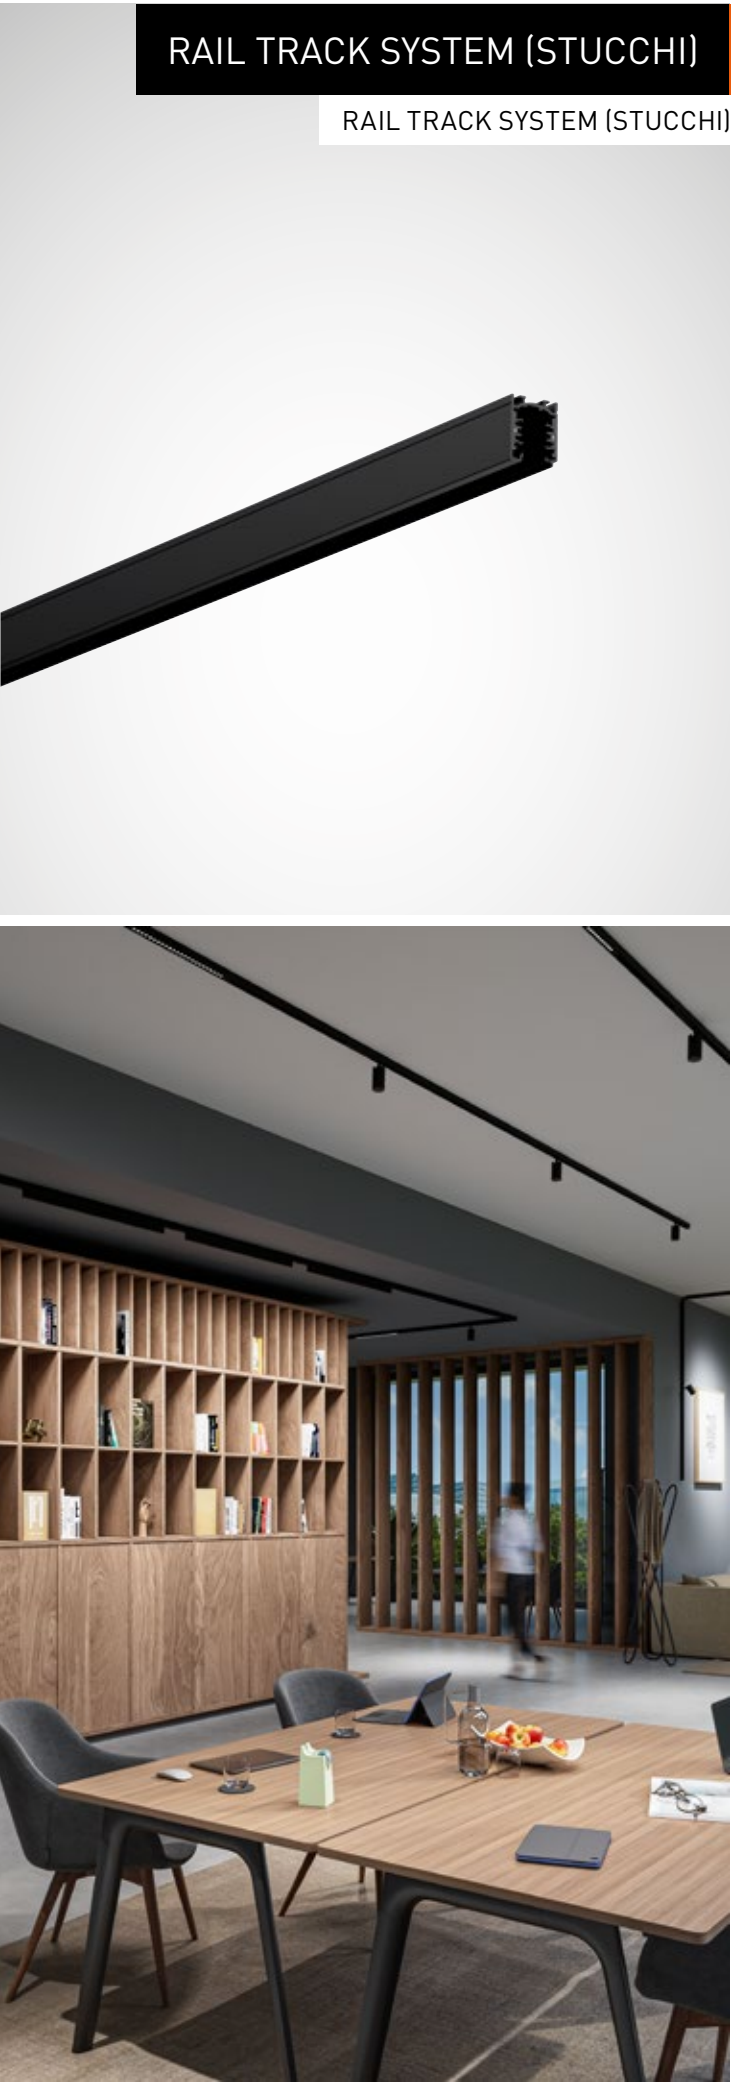

RAIL TRACK SYSTEM (STUCCHI)

RAIL TRACK SYSTEM (STUCCHI)

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.