




LENTY.
PREMIUM CONCENTRATED ILLUMINATION.

- A versatile spotlight for retail, office and architecture with various beam characteristics
- Focused, glare-free light thanks to TRILUX ConVision® technology
- Three beam characteristics with luminous intensities from 1,000 lm to 2,000 lm
- Wide selection of light colours with a CRI > 90, ideal for a wide range of merchandise types
- Suitable for smart light management, either with control line or wireless
- The spotlight head swivels out to 50° and rotates through 355°

www.trilux.com/lenty-recessed

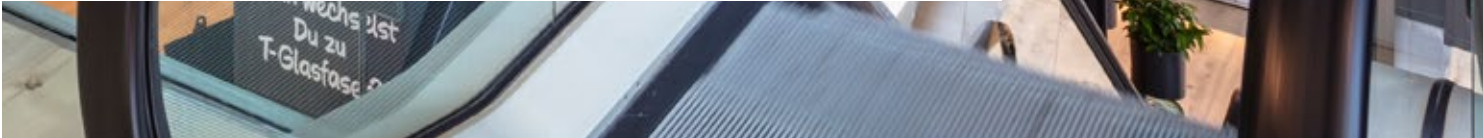

Detailed product information:
www.trilux.com/lenty-recessed



Lenty	
 Mounting type	Recessed
 Functions	Accent lighting General lighting
 Light point height	2.8 - 4.5 m
 Beam characteristic	spot medium flood flood
 Luminaire luminous flux	1,000 lm - 2,000 lm
 Colour rendering index Light colour	Ra > 90 2,700 K 3,500 K 2,700 K - Brilliant Food (BF) 3,100 K - Brilliant Colour (BC) 3,200 K - Efficient White (EW) 4,000 K - Efficient Cool (EC)
 Service life	L80 = 50,000 h
 Luminaire colour	black white
 Operating mode	switchable and DALI dimmable (ETDD) Bluetooth Low Energy (ETBLE) switchable (ET)
 Connectivity	Casambi capable

CE UK IP20



Also as a track spotlight

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.