


Detailed product information: www.trilux.com/belviso-c1 www.trilux.com/belviso-c2



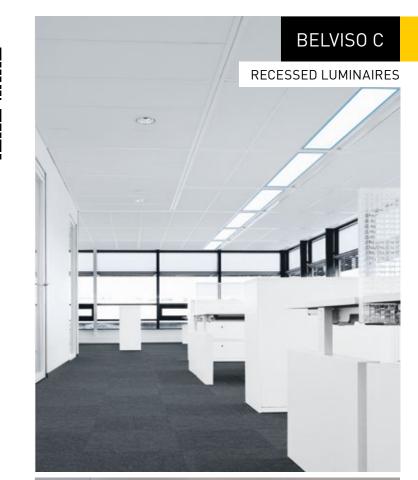

#### Belviso C

### Mounting type

Recessed Semi-recessed

#### 🚨 Mounting location

System ceiling with exposed grids
System ceiling with concealed grids (M84) Ceiling

#### 🕮 Design

square linear

#### A Beam characteristic

# Q Luminaire luminous flux 3,900 - 4,050 lm

#### -Ò: Colour rendering index | Light colour

Ra > 80 3,000 K

Tunable White 3,000 K - 6,500 K Further light colours on request

#### Service life L80 = 70,000 h

C Luminaire colour

switchable (ET)

# Additional equipment with coloured light frame


### • Accessories Fixing accessories









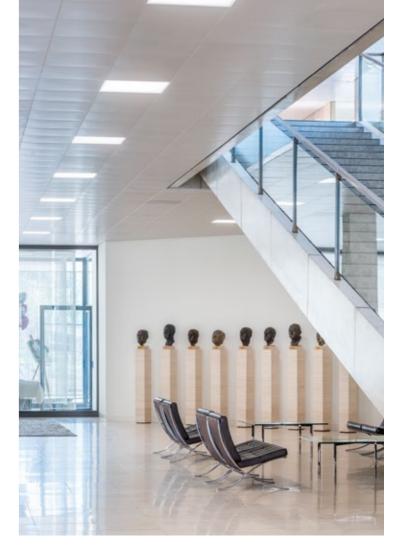

129

### **CONTACTS**

#### TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

#### SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43