FREE-STANDING AND DESKTOP LUMINAIRES



Setting of light via app





Mounting type Positioning

Mounting location

Table and surface

A Beam characteristic

Indirect component: lambertian with Triple Glare Control System (TGCS) Direct component: asymmetric wide

Luminaire luminous flux indirect 5,000 lm direct 500 lm

-O- Colour rendering index | Light colour Ra > 80

Tunable White 2,700 K - 6,000 K

L80 = 50,000 h C Luminaire colour

Service life

black silver-grey white

♥ Operating mode

switchable and DALI dimmable (ETDI)

((†)) Connectivity

LiveLink Workplace Networking via BLE network

🌣 Additional equipment

Three different versions (Comfort, Smart Single, Smart Connect) Height-adjustable luminaire head USB charging port or inductive charging function Variants with table clamp Direct and indirect components separately controllable


Accessories

Wireless external push-button







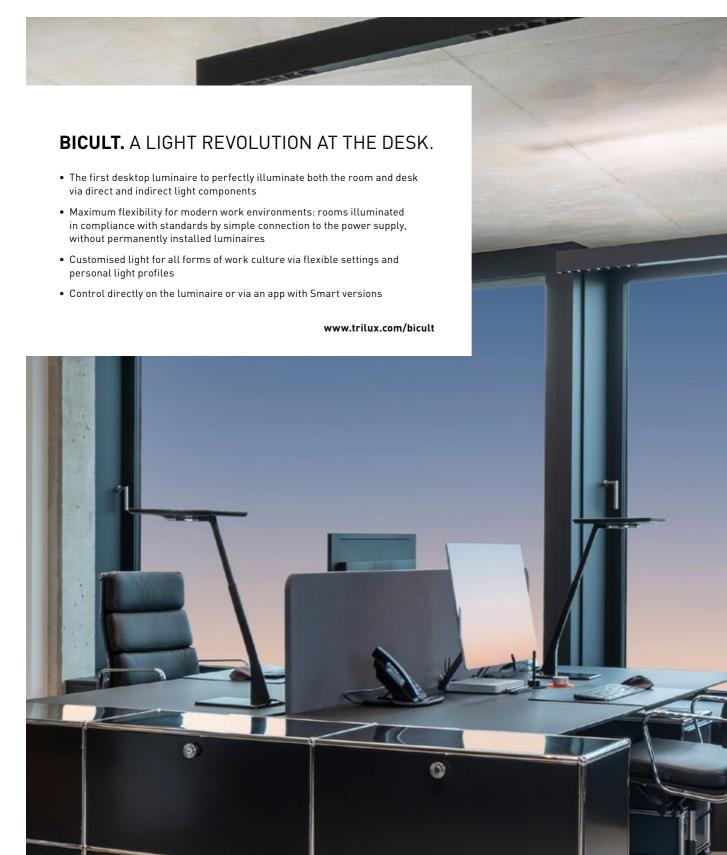

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43