


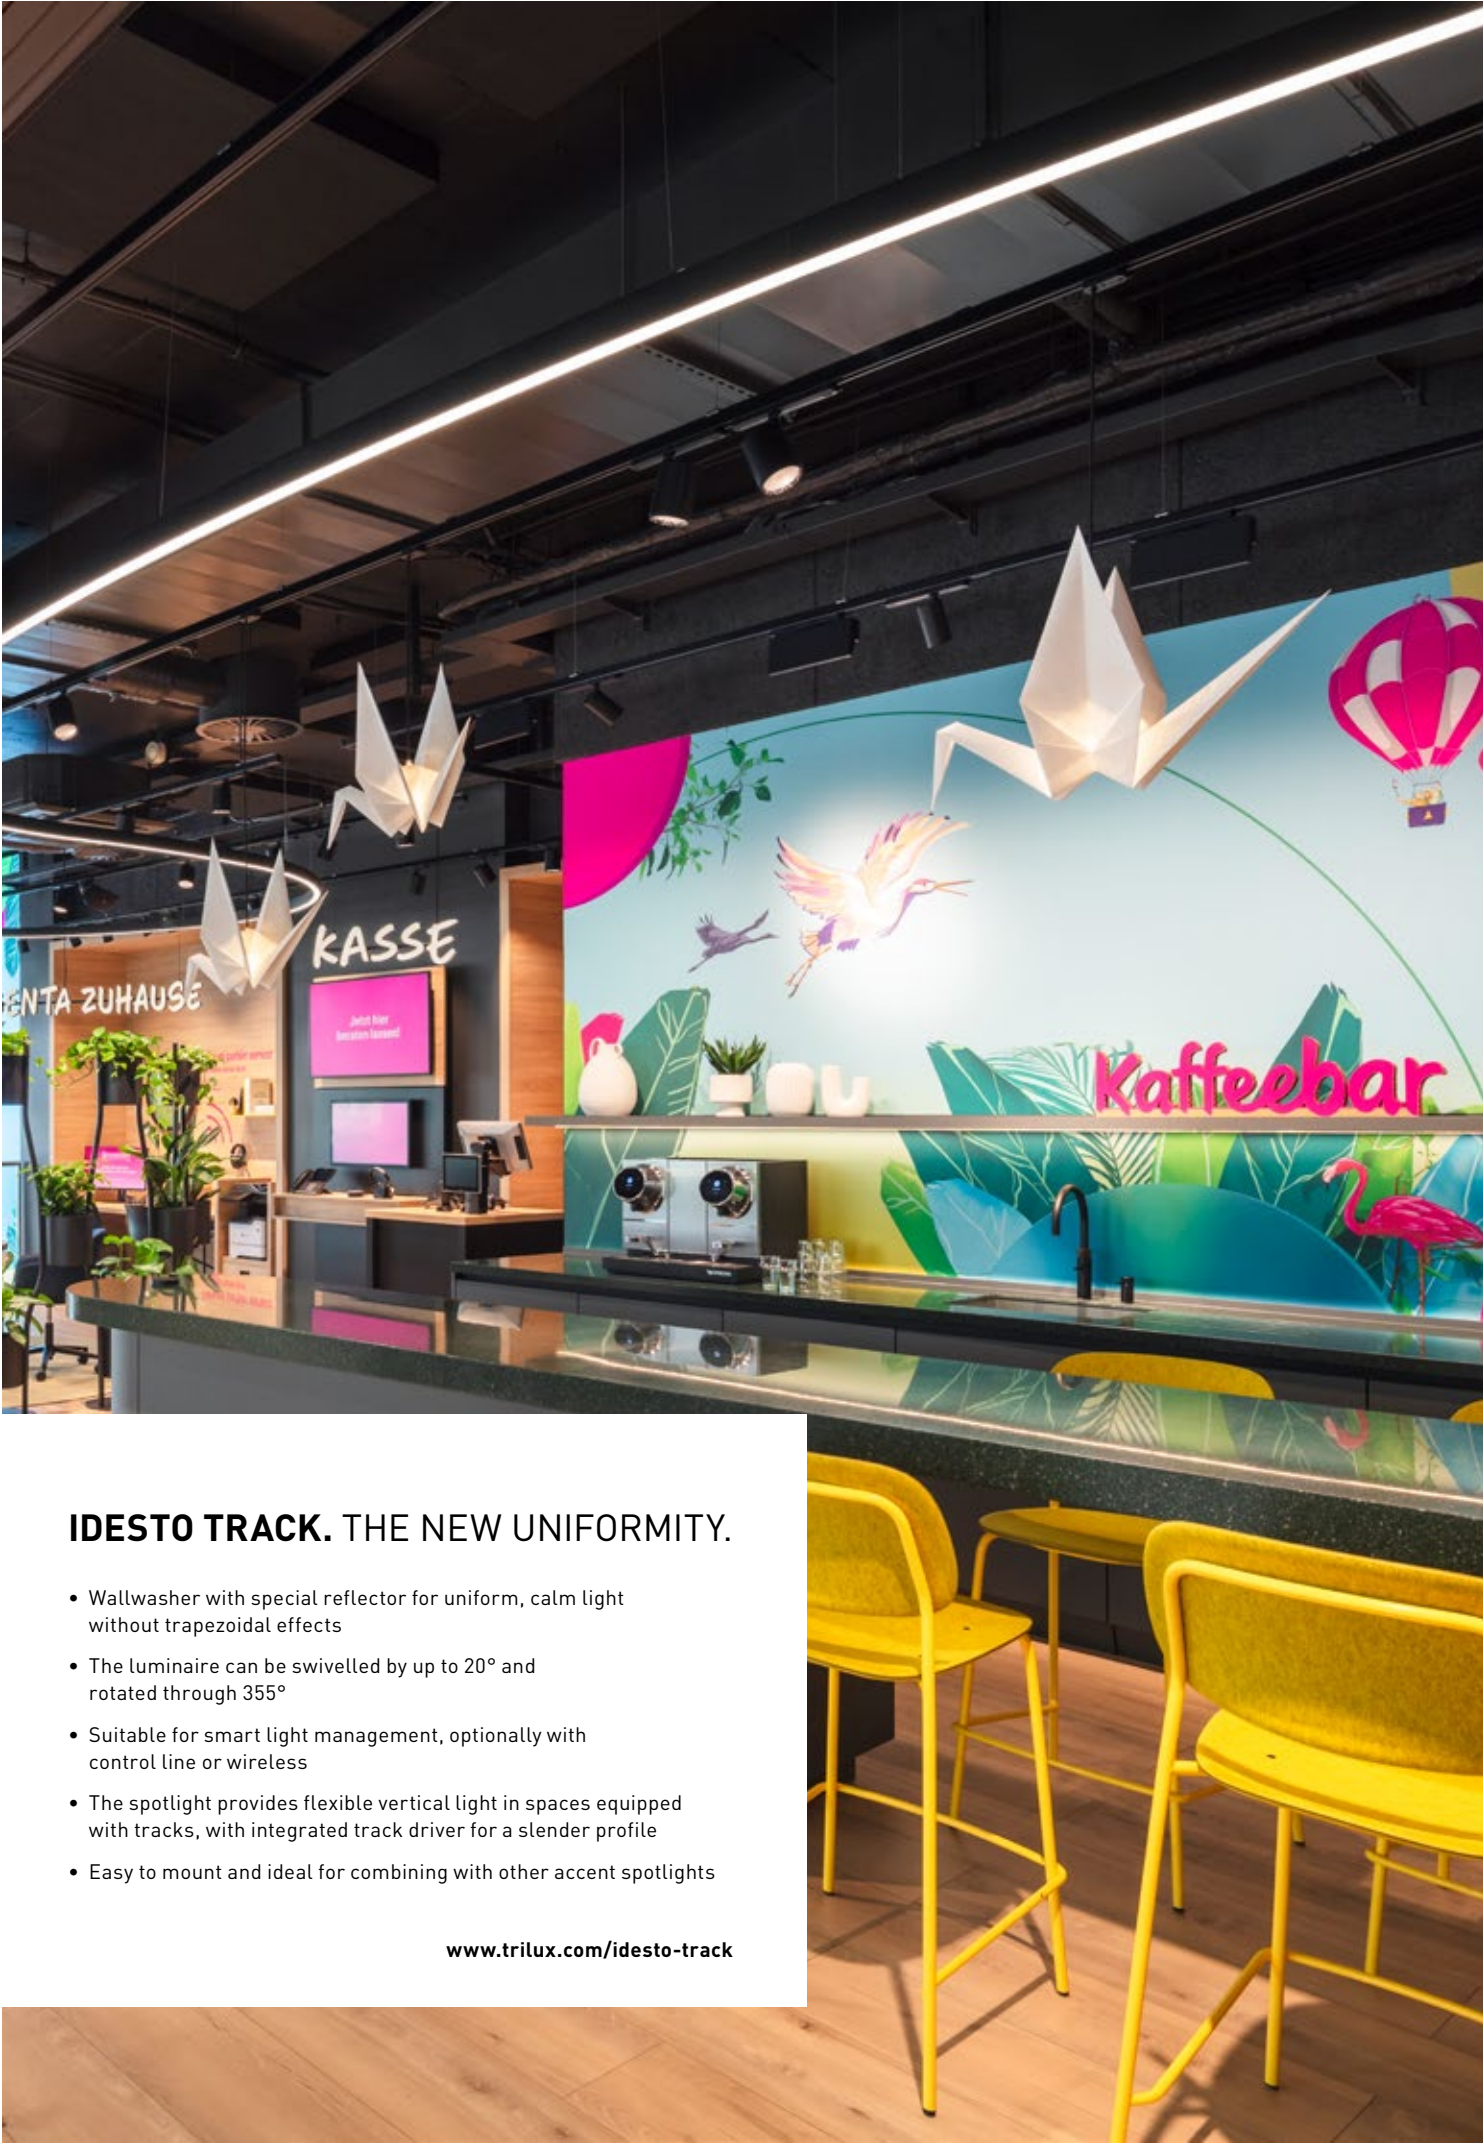

IDESTO TRACK. THE NEW UNIFORMITY.

- Wallwasher with special reflector for uniform, calm light without trapezoidal effects
- The luminaire can be swivelled by up to 20° and rotated through 355°
- Suitable for smart light management, optionally with control line or wireless
- The spotlight provides flexible vertical light in spaces equipped with tracks, with integrated track driver for a slender profile
- Easy to mount and ideal for combining with other accent spotlights

www.trilux.com/idesto-track

Detailed product information:
www.trilux.com/idesto-track




Idesto Track	
	Mounting type Track
	Functions Wall illumination
	Light point height 2.8 - 4.5 m
	Beam characteristic wallwasher
	Luminaire luminous flux 2,000 lm - 5,000 lm
	Colour rendering index Light colour Ra > 80 2,700 K 3,000 K 3,500K 4,000 K Ra > 90 2,700 K - Brilliant Food (BF) 3,100 K - Brilliant Colour (BC) 3,200 K - Efficient White (EW) 4,000 K - Efficient Cool (EC) Meat (M) Meat + Fish (M+F)
	Service life L80 = 50,000 h
	Luminaire colour black white
	Operating mode switchable and DALI dimmable (ETDD) Bluetooth Low Energy (ETBLE) switchable (ET)
	Connectivity Casambi capable

CE IP20

IDESTO TRACK

NORDIC TRACK SYSTEM

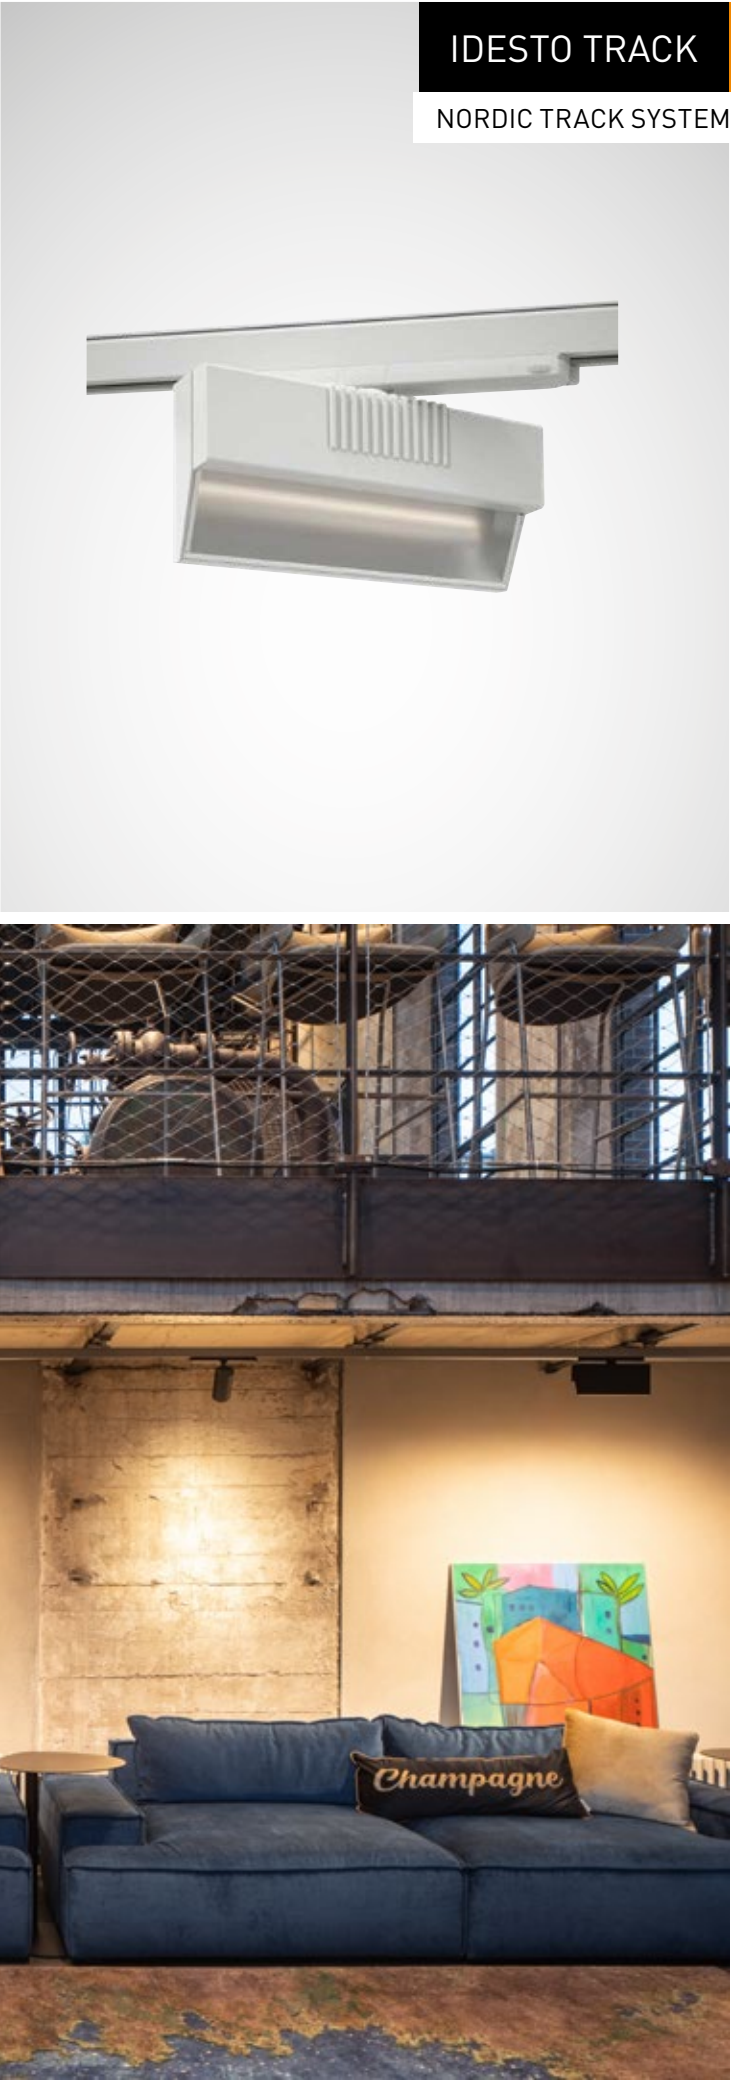

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.