



LIGHTPANEL. QUALITY OF LIGHT AND EFFICIENCY IN A FLAT DESIGN.

- Flat panel luminaires for mounting to track, parallel or rotated by 90°, for versatile retail lighting
- ConVision® technology ensures glare-free light and optimised visual comfort with brilliant merchandise display
- The lens optic enables extreme efficiency of up to 170 lm/W with up to 12,000 lm – ideal for sustainable lighting concepts
- Suitable for smart light management, optionally with control line or wireless
- High quality of light with CRI > 90 for all available light colours
- Suitable for merchandise aisles, checkout areas and promotional areas


www.trilux.com/lightpanel-nordic
www.trilux.com/lightpanel-convision-nordic

Detailed product information:
www.trilux.com/lightpanel-nordic
www.trilux.com/lightpanel-convision-nordic



Lightpanel Lightpanel ConVision®	
	Mounting type Track
	Functions General lighting Aisle zone lighting
	Light point height 2.8 - 4.5 m
	Beam characteristic <u>Lightpanel</u> wide very wide asymmetric wide asymmetric narrow <u>Lightpanel ConVision®</u> wide asymmetric wide asymmetric narrow
	Luminaire luminous flux 4,500 lm - 12,000 lm (Lightpanel) 4,000 lm - 8,000 lm (Lightpanel ConVision®)
	Colour rendering index Light colour Ra > 80, Ra > 90 3,000 K 4,000 K Tunable White
	Service life L80 = 50,000 h
	Luminaire colour <u>Lightpanel</u> black silver-grey white <u>Lightpanel with ConVision®</u> black with black limiter black with white limiter silver-grey with black limiter silver-grey with white limiter white with black limiter white with white limiter
	Operating mode switchable and DALI dimmable (ETDD) Bluetooth Low Energy (ETBLE) switchable (ET)
	Connectivity Casambi capable

CE IP20

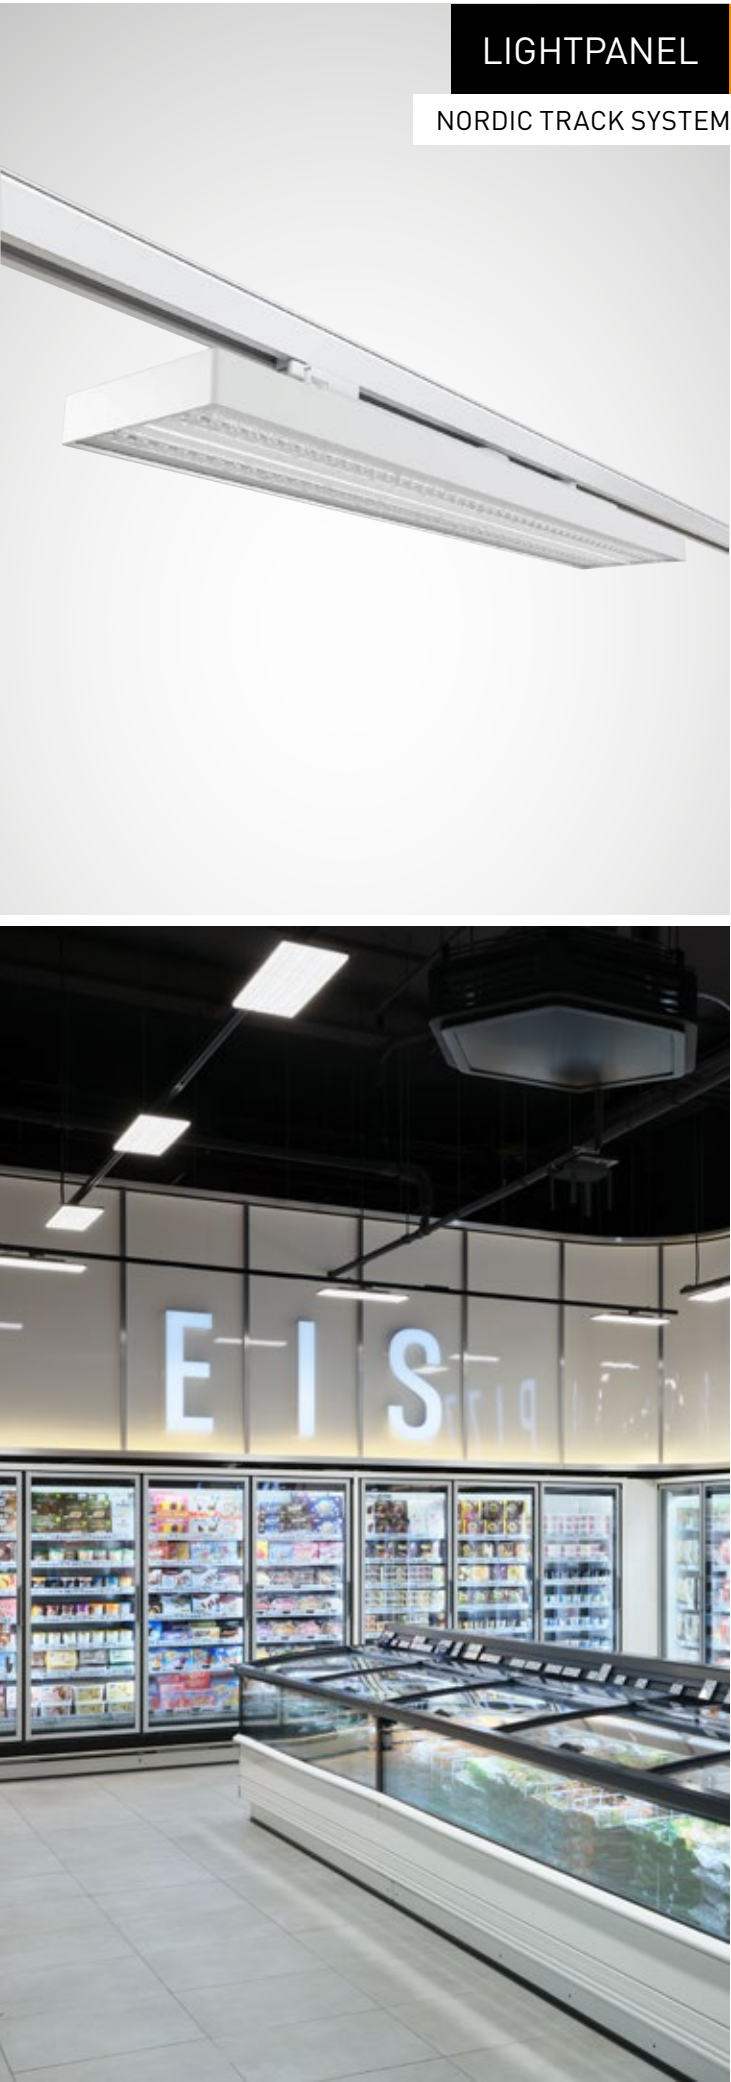

LIGHTPANEL

NORDIC TRACK SYSTEM

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.