



LUCEOS S. FLEXIBLE WITH INTELLIGENCE.

- The Luceos free-standing luminaire achieves standard-compliant illumination of the workplace even without supplementary ceiling lighting
- Despite the extremely flat luminaire head of just 23 mm, the direct and indirect components are separately controllable
- Thanks to flexible variants, double and four-person workstations can also be perfectly illuminated
- The luminaires are available in three intelligence levels: without sensor, with PIR sensor or with HF sensor and LiveLink Workplace control

www.trilux.com/luceos-stand





Detailed product information:
www.trilux.com/luceos-stand




Luceos S	
 Mounting type	Positioning
 Mounting location	Floor
 Beam characteristic	Indirect component: lambertian Direct component: asymmetric wide
 Luminaire luminous flux	8,300 - 30,600 lm
 Colour rendering index Light colour	Ra > 80 3,000 K 4,000 K
 Service life	L80 = 50,000 h
 Luminaire colour	black silver-grey white
 Operating mode	switchable and DALI dimmable (ETDS/ETDI/ETDD)
 Connectivity	LiveLink Workplace Networking via BLE network
 Additional equipment	Direct and indirect components separately controllable Three different versions: ETDD – without sensors ETDS – with daylight and presence sensors ETDI – with HF sensors
 Accessories	Wireless external push-button

CE UK IP20

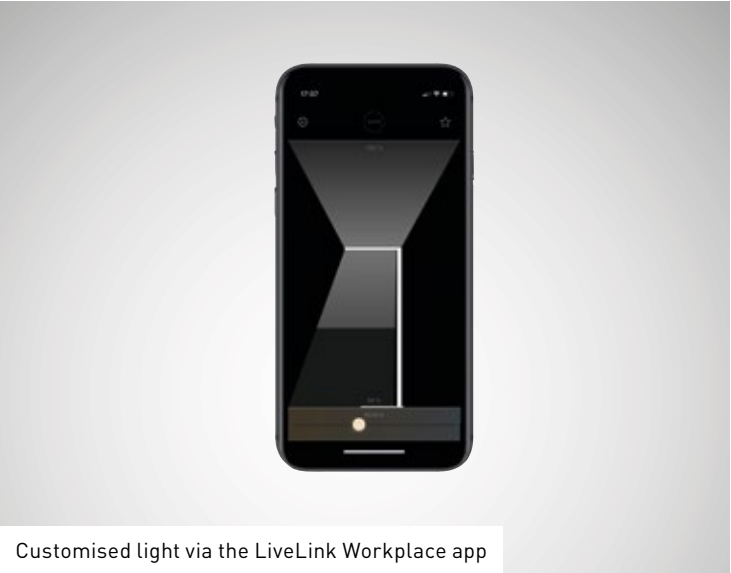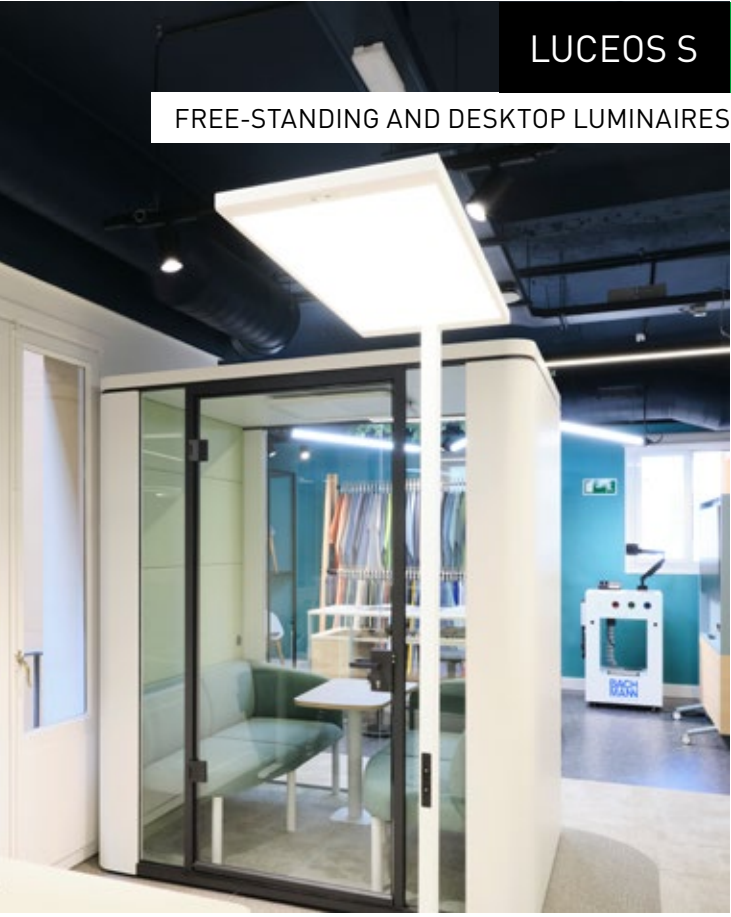

Customised light via the LiveLink Workplace app

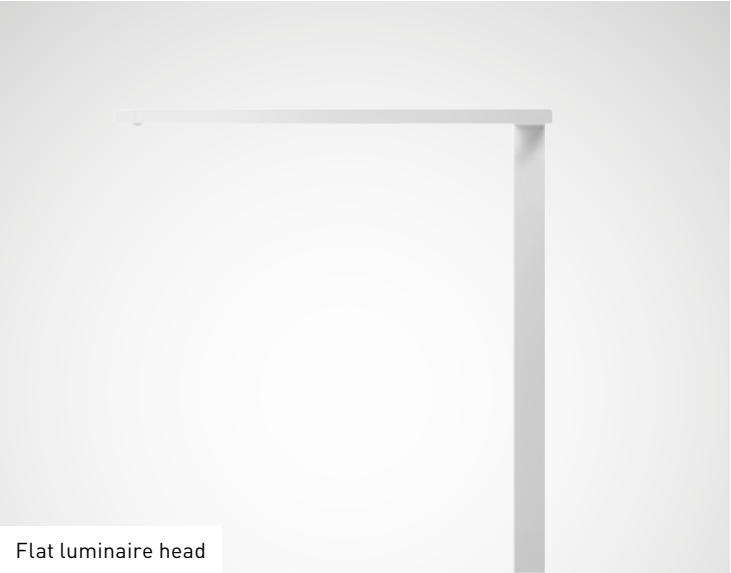

Flat luminaire head

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.