



OLISQ. GEOMETRIC LIGHT WITHOUT LIMITS.

- Three sizes, one design, all functionalities: Olisq, in round, square and linear designs, has a total of 9 sizes
- The wide range of mounting types and accessories ensure a flawless appearance and enable customised lighting concepts
- The click system enables quick installation as well as efficient 1:1 refurbishment of many existing solutions by reusing the existing drilling and feed points
- All components are removed from the box in mounting sequence – thus preventing damage and soiling

www.trilux.com/olisq

Detailed product information:
www.trilux.com/olisq



Olisq

Mounting type
Surface-mounted
Suspended

Mounting location
Ceiling
Wall

Beam characteristic
lambertian

Luminaire luminous flux
Olisq Q: 1,300 – 4,500 lm
Olisq R: 950 – 6,000 lm
Olisq L: 1,900 – 7,500 lm

Colour rendering index | Light colour
Ra > 80
3,000 K
4,000 K
Tunable White 2,700 K – 6,000K

Service life
L80 = 100,000 h


Luminaire colour
white

Operating mode
switchable and DALI dimmable (ETDD)
Bluetooth Low Energy (ETBLE)
switchable (ET)

Connectivity
LiveLink SwarmSens capable
Casambi capable

Additional equipment
Motion sensor
Single battery system, 3 hours

Accessories
Decorative attachments
Theft protection
Spare parts
Replacement diffusers
Semi-recessed housing
Mounting accessories
Suction pads
Wire suspensions

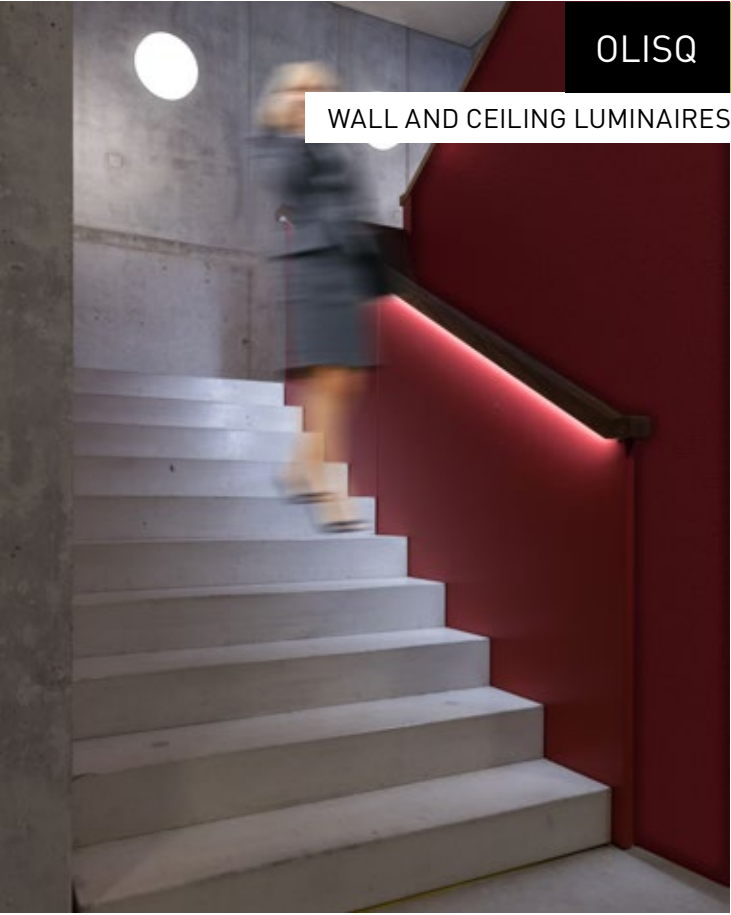

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.