



MONTIGO. THE EFFICIENT AND COST-OPTIMISED BASIC SOLUTION.

- Energy efficiency of 127 lm/W and a 35,000 hour service life ensure low operating costs and low maintenance requirements
- Available in three module lengths (600, 1,200, 1,500)
- Easy replacement thanks to same geometry as conventional diffuser luminaires
- Thanks to low investment costs, suitable for a quick and easy start with LED lighting

www.trilux.com/montigo

Detailed product information:
www.trilux.com/montigo




Montigo	
	Mounting type Surface-mounted
	Mounting location Ceiling
	Beam characteristic lambertian wide
	Luminaire luminous flux 1,400 - 3,400 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K
	Service life L80 = 35,000 h
	Luminaire colour white
	Operating mode switchable and DALI dimmable (ETDD) switchable (ET)

   IP40

MONTIGO

SURFACE-MOUNTED LUMINAIRES

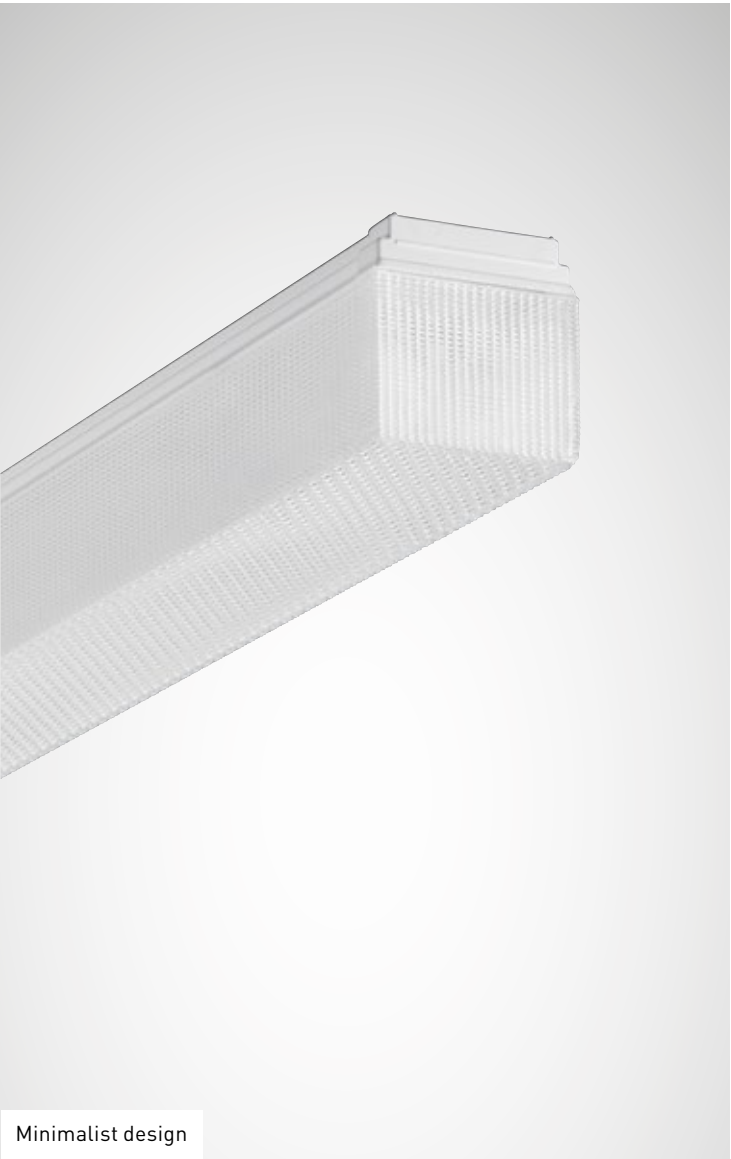

Minimalist design

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.