


Air quality at a glance – added value through CO₂ sensors



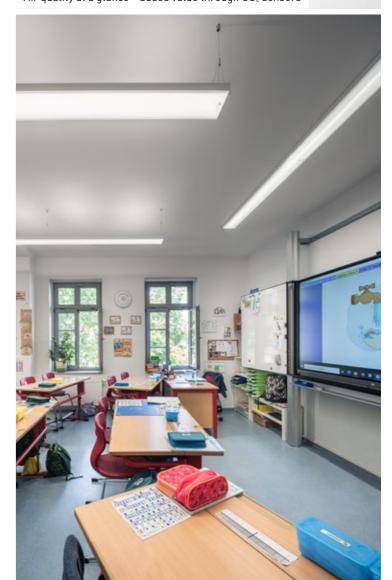

Mounting type Surface-mounted

& Mounting location Ceiling

🚡 Beam characteristic wide wallwasher

1,900 - 4,700 lm

∵Ö: Colour rendering index | Light colour Ra > 80

3,000 K 4,000 K Tunable White 2,700 K – 6,500 K

Service life L80 = 50,000 h

C Luminaire colour silver-grey white

♥ Operating mode switchable and DALI dimmable (ETDD)
Bluetooth Low Energy (ETBLE)
switchable (ET)

(1) Connectivity LiveLink integrated Casambi integrated

Additional equipment
LiveLink sensor IR Micro for daylightdependent control and presence detection Single battery system, 3 hours Multilumen

Accessories Diffusor removal tool ${\sf Blind\ modules}$ Through-wiring End caps Continuous-line couplings Ceiling spacers









- High-quality planar light for education and offices
- Rapid installation as continuous line due to throughwiring with only one power feed
- Asymmetric versions for blackboard lighting with the same external design as the general lighting
- Variants with integrated daylight and presence control or emergency light function
- Easy retroactive removal of the control gear unit if required

www.trilux.com/opendo-led



CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43