


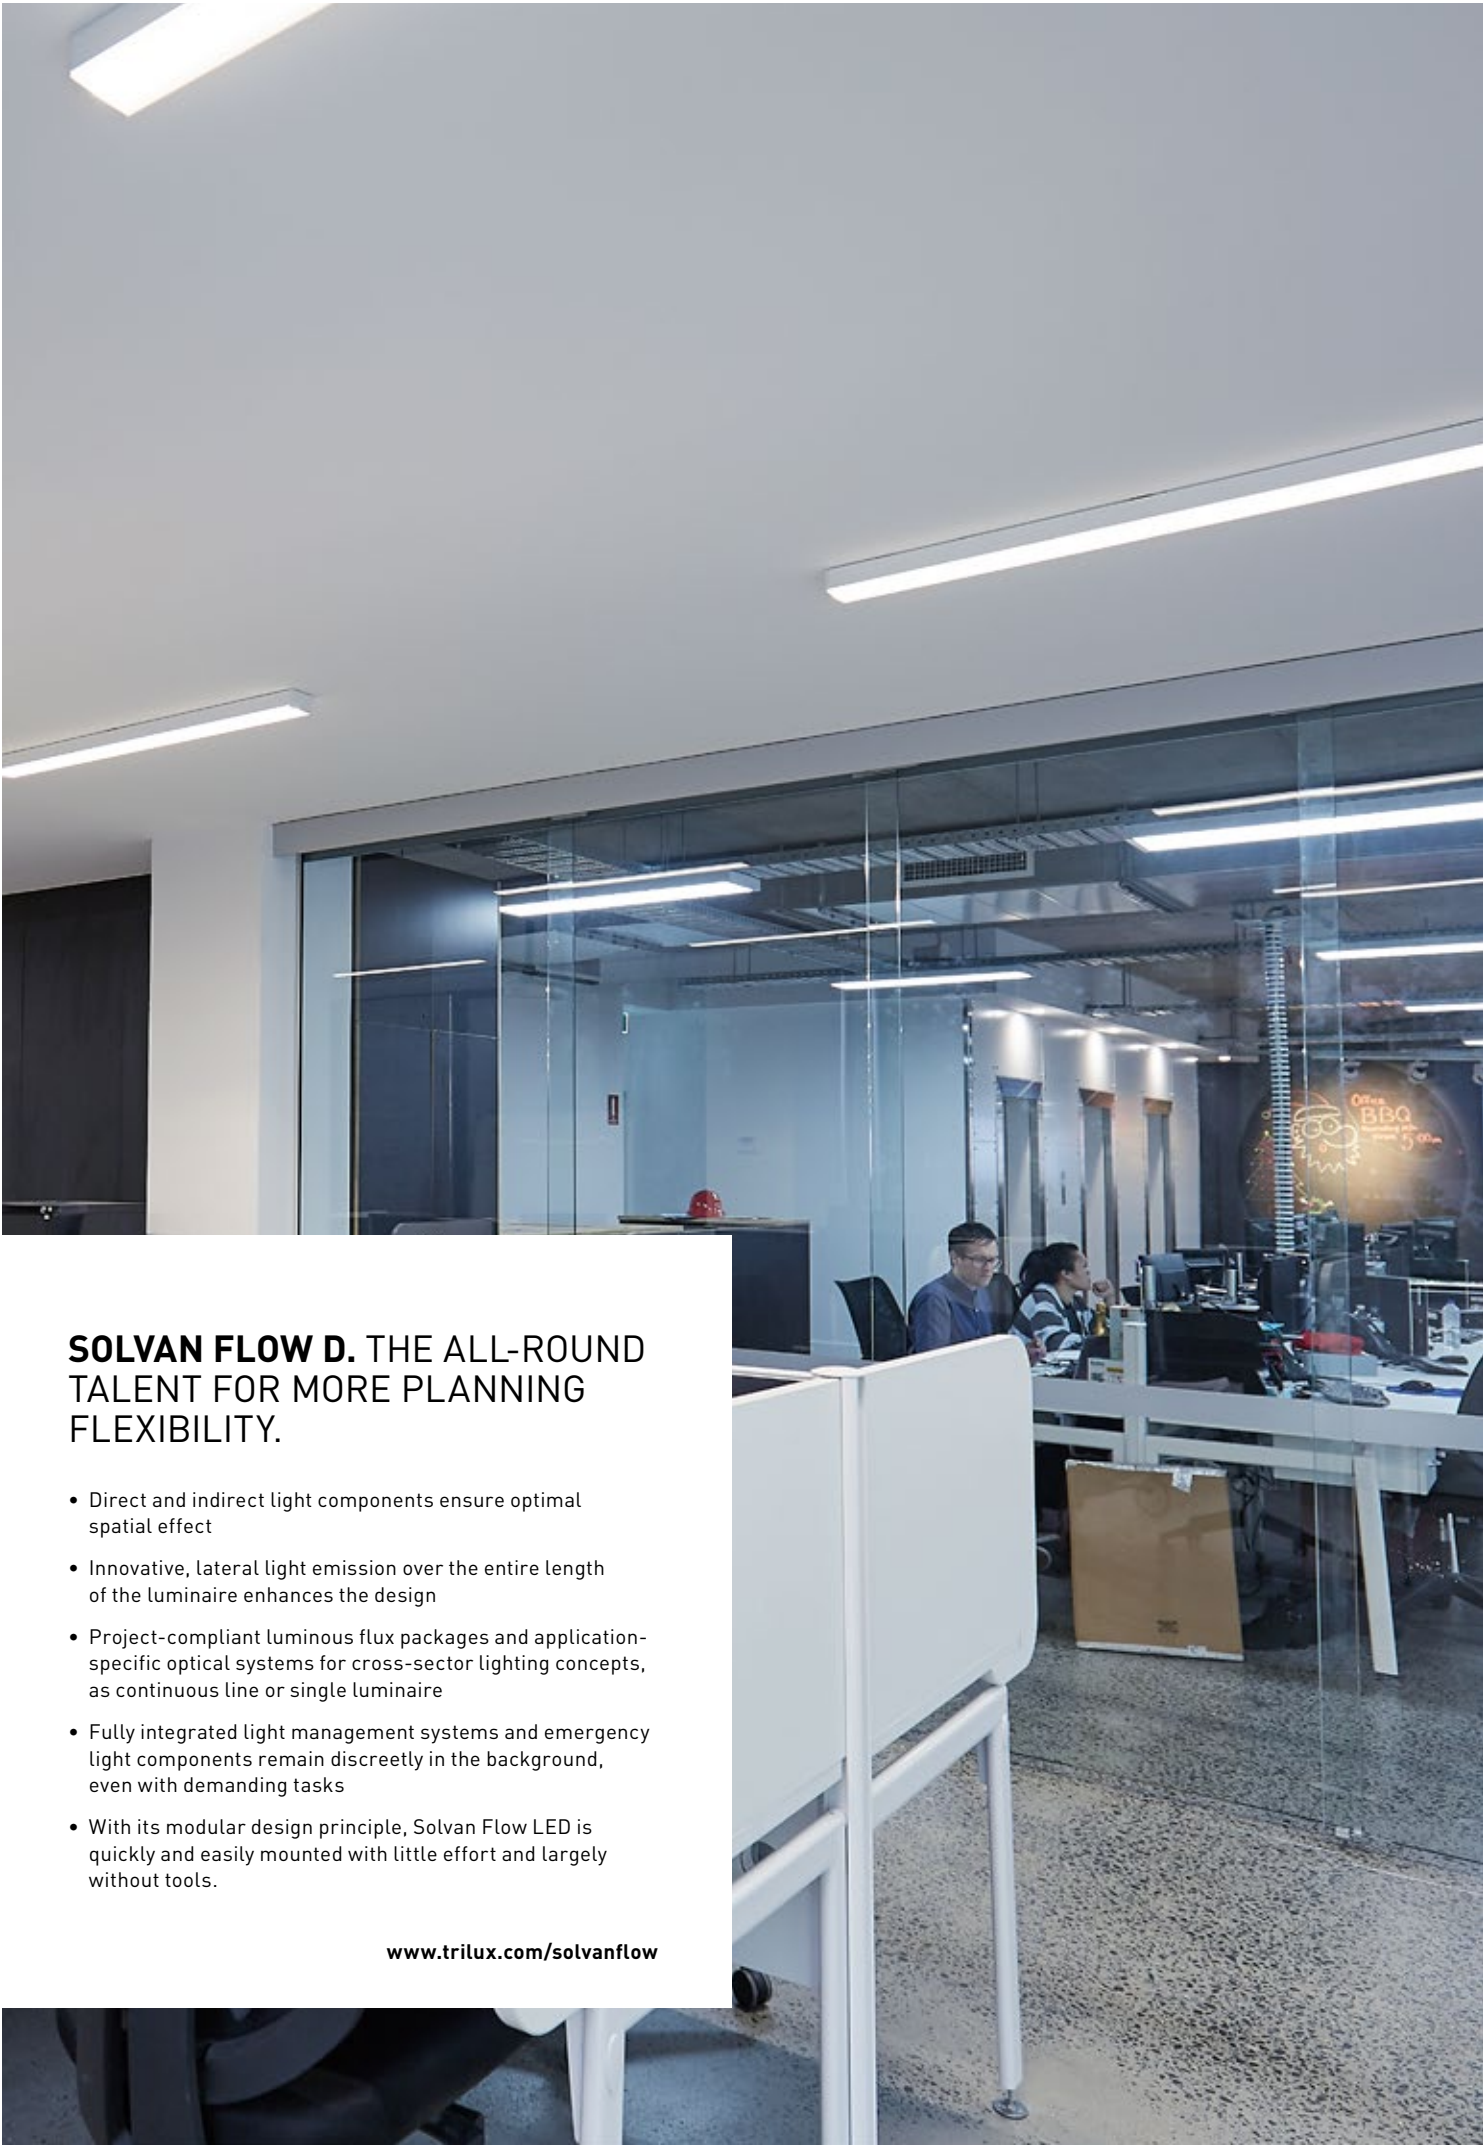

**SOLVAN FLOW D. THE ALL-ROUND TALENT FOR MORE PLANNING FLEXIBILITY.**

- Direct and indirect light components ensure optimal spatial effect
- Innovative, lateral light emission over the entire length of the luminaire enhances the design
- Project-compliant luminous flux packages and application-specific optical systems for cross-sector lighting concepts, as continuous line or single luminaire
- Fully integrated light management systems and emergency light components remain discreetly in the background, even with demanding tasks
- With its modular design principle, Solvan Flow LED is quickly and easily mounted with little effort and largely without tools.

[www.trilux.com/solvanflow](http://www.trilux.com/solvanflow)

Detailed product information:  
[www.trilux.com/solvanflow](http://www.trilux.com/solvanflow)



|                                                                                       |                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Solvan Flow D</b>                                                                  |                                                                                                                                                                                                        |
|    | <b>Mounting type</b><br>Surface-mounted<br>Suspended (via accessories)                                                                                                                                 |
|    | <b>Mounting location</b><br>Ceiling<br>Ceiling with strip system (using accessories)                                                                                                                   |
|    | <b>Beam characteristic</b><br>wide<br>medium-wide<br>wallwasher                                                                                                                                        |
|  | <b>Luminaire luminous flux</b><br>3,000 - 4,500 lm                                                                                                                                                     |
|  | <b>Colour rendering index   Light colour</b><br>Ra > 80<br>3,000 K<br>4,000 K<br>Tunable White 2,700 K – 6,500 K                                                                                       |
|  | <b>Service life</b><br>L80 = 50,000 h                                                                                                                                                                  |
|  | <b>Luminaire colour</b><br>silver-grey<br>white                                                                                                                                                        |
|  | <b>Operating mode</b><br>switchable and DALI dimmable (ETDD)<br>Bluetooth Low Energy (ETBLE)<br>switchable (ET)                                                                                        |
|  | <b>Connectivity</b><br>LiveLink integrated<br>Casambi integrated                                                                                                                                       |
|  | <b>Additional equipment</b><br>Single battery system, 3 hours<br>Switching relay for emergency power supply systems                                                                                    |
|  | <b>Accessories</b><br>Connection cables<br>Ceiling roses<br>Through-wiring<br>Installation accessory for panel ceilings<br>End caps<br>Continuous-line couplings<br>Wire suspensions<br>Blind elements |

     IP20



SOLVAN FLOW D

SURFACE-MOUNTED LUMINAIRES

# CONTACTS

## **TRILUX GmbH & Co. KG**

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

[www.trilux.com/en](http://www.trilux.com/en)

## **SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.**

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

[www.endalight.com](http://www.endalight.com)

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.