


VARITURA SUSPENDED LUMINAIRES



VARITURA. UNDERLINING DESIGN.

- A translucent luminaire, an eye-catcher in the room and simultaneously a functional, standard-compliant workstation luminaire with diffuse wide distribution optic, optional indirect light component and UGR ≤19.
- With its IP54 housing, Varitura is just as suitable for offices and educational facilities as for ancillary rooms and technical areas.
- Flexible fixing points on the rear of the luminaire allow existing drilling or suspension points to be reused perfect for refurbishment projects.
- Durable with a service life of L80 50,000h and efficient with up to 160 lm/W, and thanks to a modular design it can also be retrofitted and repaired – all this makes Varitura a sustainable lighting solution.

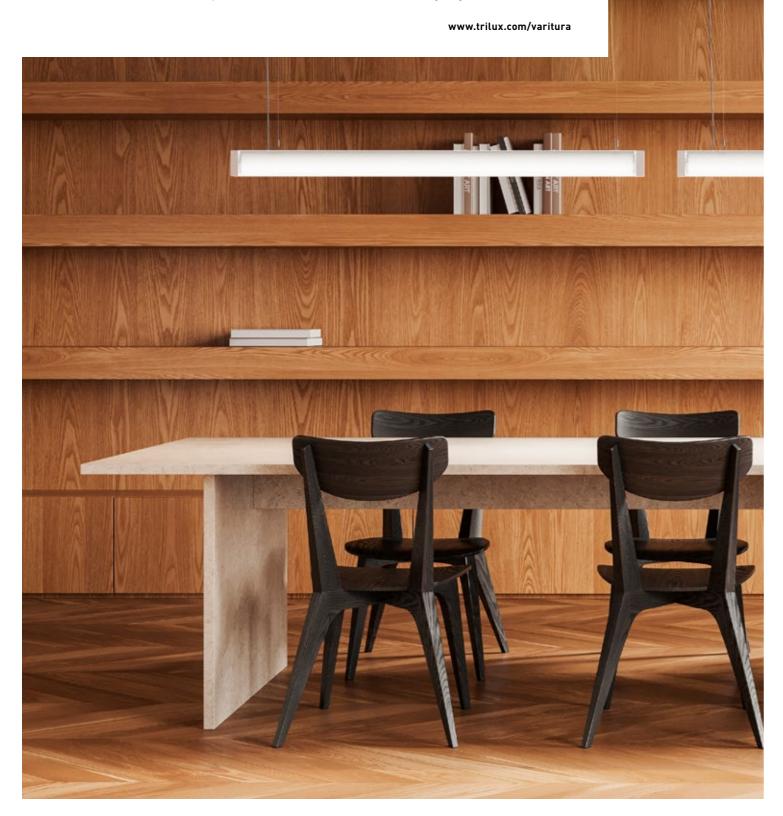

Varitura

Mounting type

Surface-mounted Suspended

& Mounting location

Ceiling

Size

linear

🚡 Beam characteristic

wide UGR \leq 19 direct-indirect

3,700 - 6,000 lm

-Ò- Colour rendering index | Light colour

Ra > 80 3,000 K 4,000 K

Service life

L80 = 50,000 h

C Luminaire colour

white

♥ Operating mode

switchable and DALI dimmable (ETDD)

((†)) Connectivity on demand

Accessories

Connection cables

Ceiling roses Ceiling roses with LiveLink Replacement parts End caps Mounting accessories
Wire suspensions





CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43