




PARELIA. LIGHT IN LINE WITH THE ARCHITECTURE.

- Especially suitable for building axis-parallel lighting concepts in line with the architecture
- No reflected glare due to the partitioned direct light component even if mounted centrally above the desk, ideal for new media
- Glare-free light due to high indirect component of up to 80%
- An attractive design with a lateral light line

www.trilux.com/parelia-led

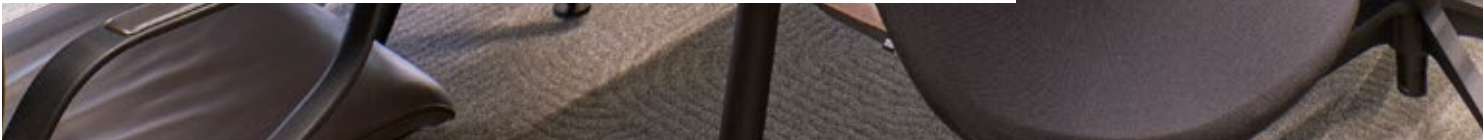

Detailed product information:
www.trilux.com/parelia-led



Parelia	
	Mounting type Suspended
	Mounting location Ceiling
	Size linear
	Beam characteristic wide direct-indirect
	Luminaire luminous flux Single luminaire: 13,700 lm Continuous-line centre: 12,200 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K Tunable White 2,700 K – 6,500 K
	Service life L80 = 50,000 h
	Luminaire colour silver-grey white
	Operating mode switchable and DALI dimmable (ETDD)
	Connectivity LiveLink capable Casambi capable
	Additional equipment LiveLink sensor IR Micro for daylight-dependent control and presence detection
	Accessories Ceiling roses Ceiling roses with LiveLink

    IP20 



PARELIA

SUSPENDED LUMINAIRES



CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.