



POLARON IQ H. PERFECT DESIGN FOR MAXIMUM OPTIONS.

- The filigree, perfectly proportioned ring blends harmoniously into the interior design
- The suspended luminaire has no separate supply cable – power supply is via the filigree wire suspensions
- The luminaire is available optionally as a recessed, semi-recessed, surface-mounted or suspended luminaire, with direct/indirect or only indirect light emission, and can be installed as a wall or ceiling luminaire

www.trilux.com/polaroniq



Detailed product information:
www.trilux.com/polaroniq




Polaron IQ H	
	Mounting type Suspended
	Beam characteristic Lambertian direct-indirect
	Luminaire luminous flux 1,700 - 2,000 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K
	Service life L80 = 70,000 h
	Luminaire colour white
	Operating mode switchable and DALI dimmable (ETDD) switchable (ET)
	Accessories Fixing accessories

    IP40




POLARON IQ H

SUSPENDED LUMINAIRES

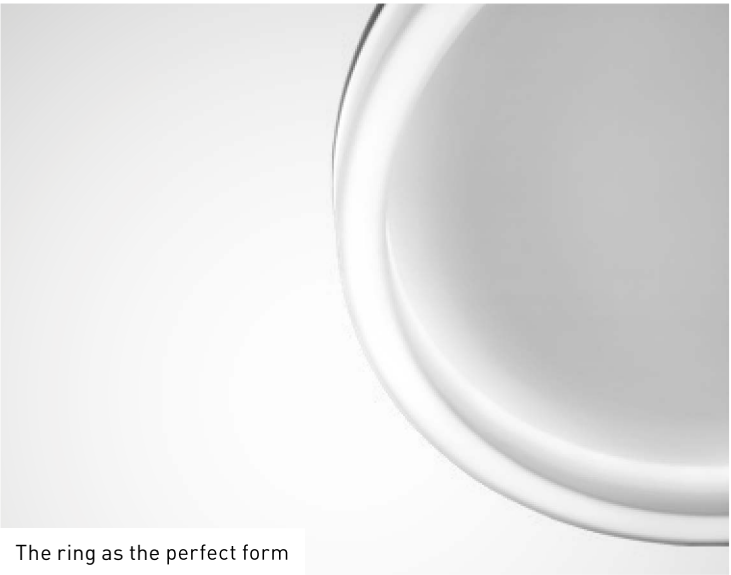

The ring as the perfect form

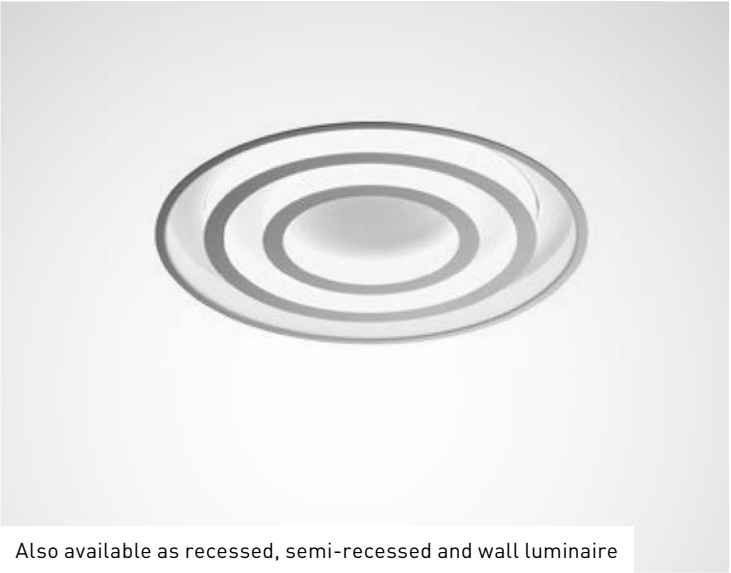

Also available as recessed, semi-recessed and wall luminaire

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.