




Planar light thanks to CDP-I optic



Also available as recessed and surface-mounted version

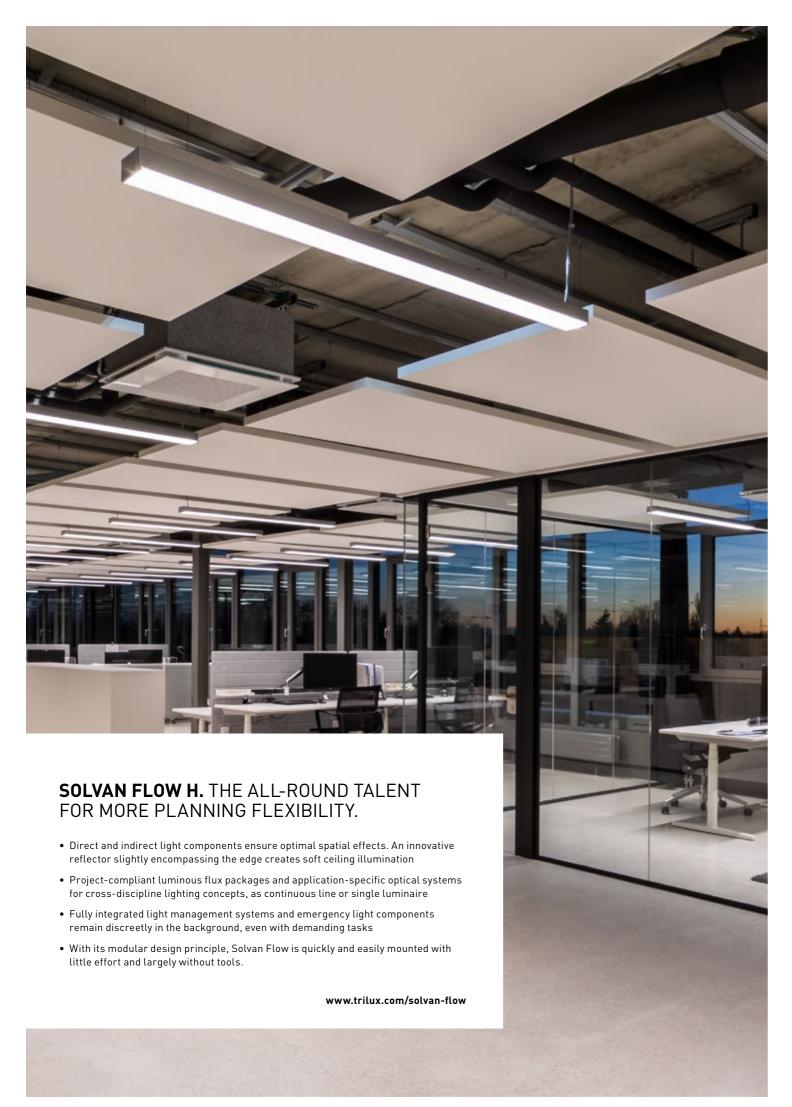

## Solvan Flow H

## Mounting type Suspended

### Mounting location Ceiling

Size linear

## Beam characteristic

medium-wide wallwasher direct-indirect

## ○ Luminaire luminous flux 5,300 - 6,400 lm

⊹Ö: Colour rendering index | Light colour

Ra > 80 3,000 K 4,000 K Tunable White 2,700 K – 6,500 K

## Service life L80 = 50,000 h

C Luminaire colour silver-grey

white

Operating mode
switchable and DALI dimmable (ETDD)
Bluetooth Low Energy (ETBLE) switchable (ET)

## (()) Connectivity

LiveLink integrated Casambi integrated

### 🌣 Additional equipment LiveLink LLWM, LLWS

Single battery system, 3 hours Switching relay for emergency power supply systems

## Accessories

Removal tool Connection cables Ceiling roses Through-wirings End caps Continuous-line couplings Wire suspensions Blind elements



# **CONTACTS**

## TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

## SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43