


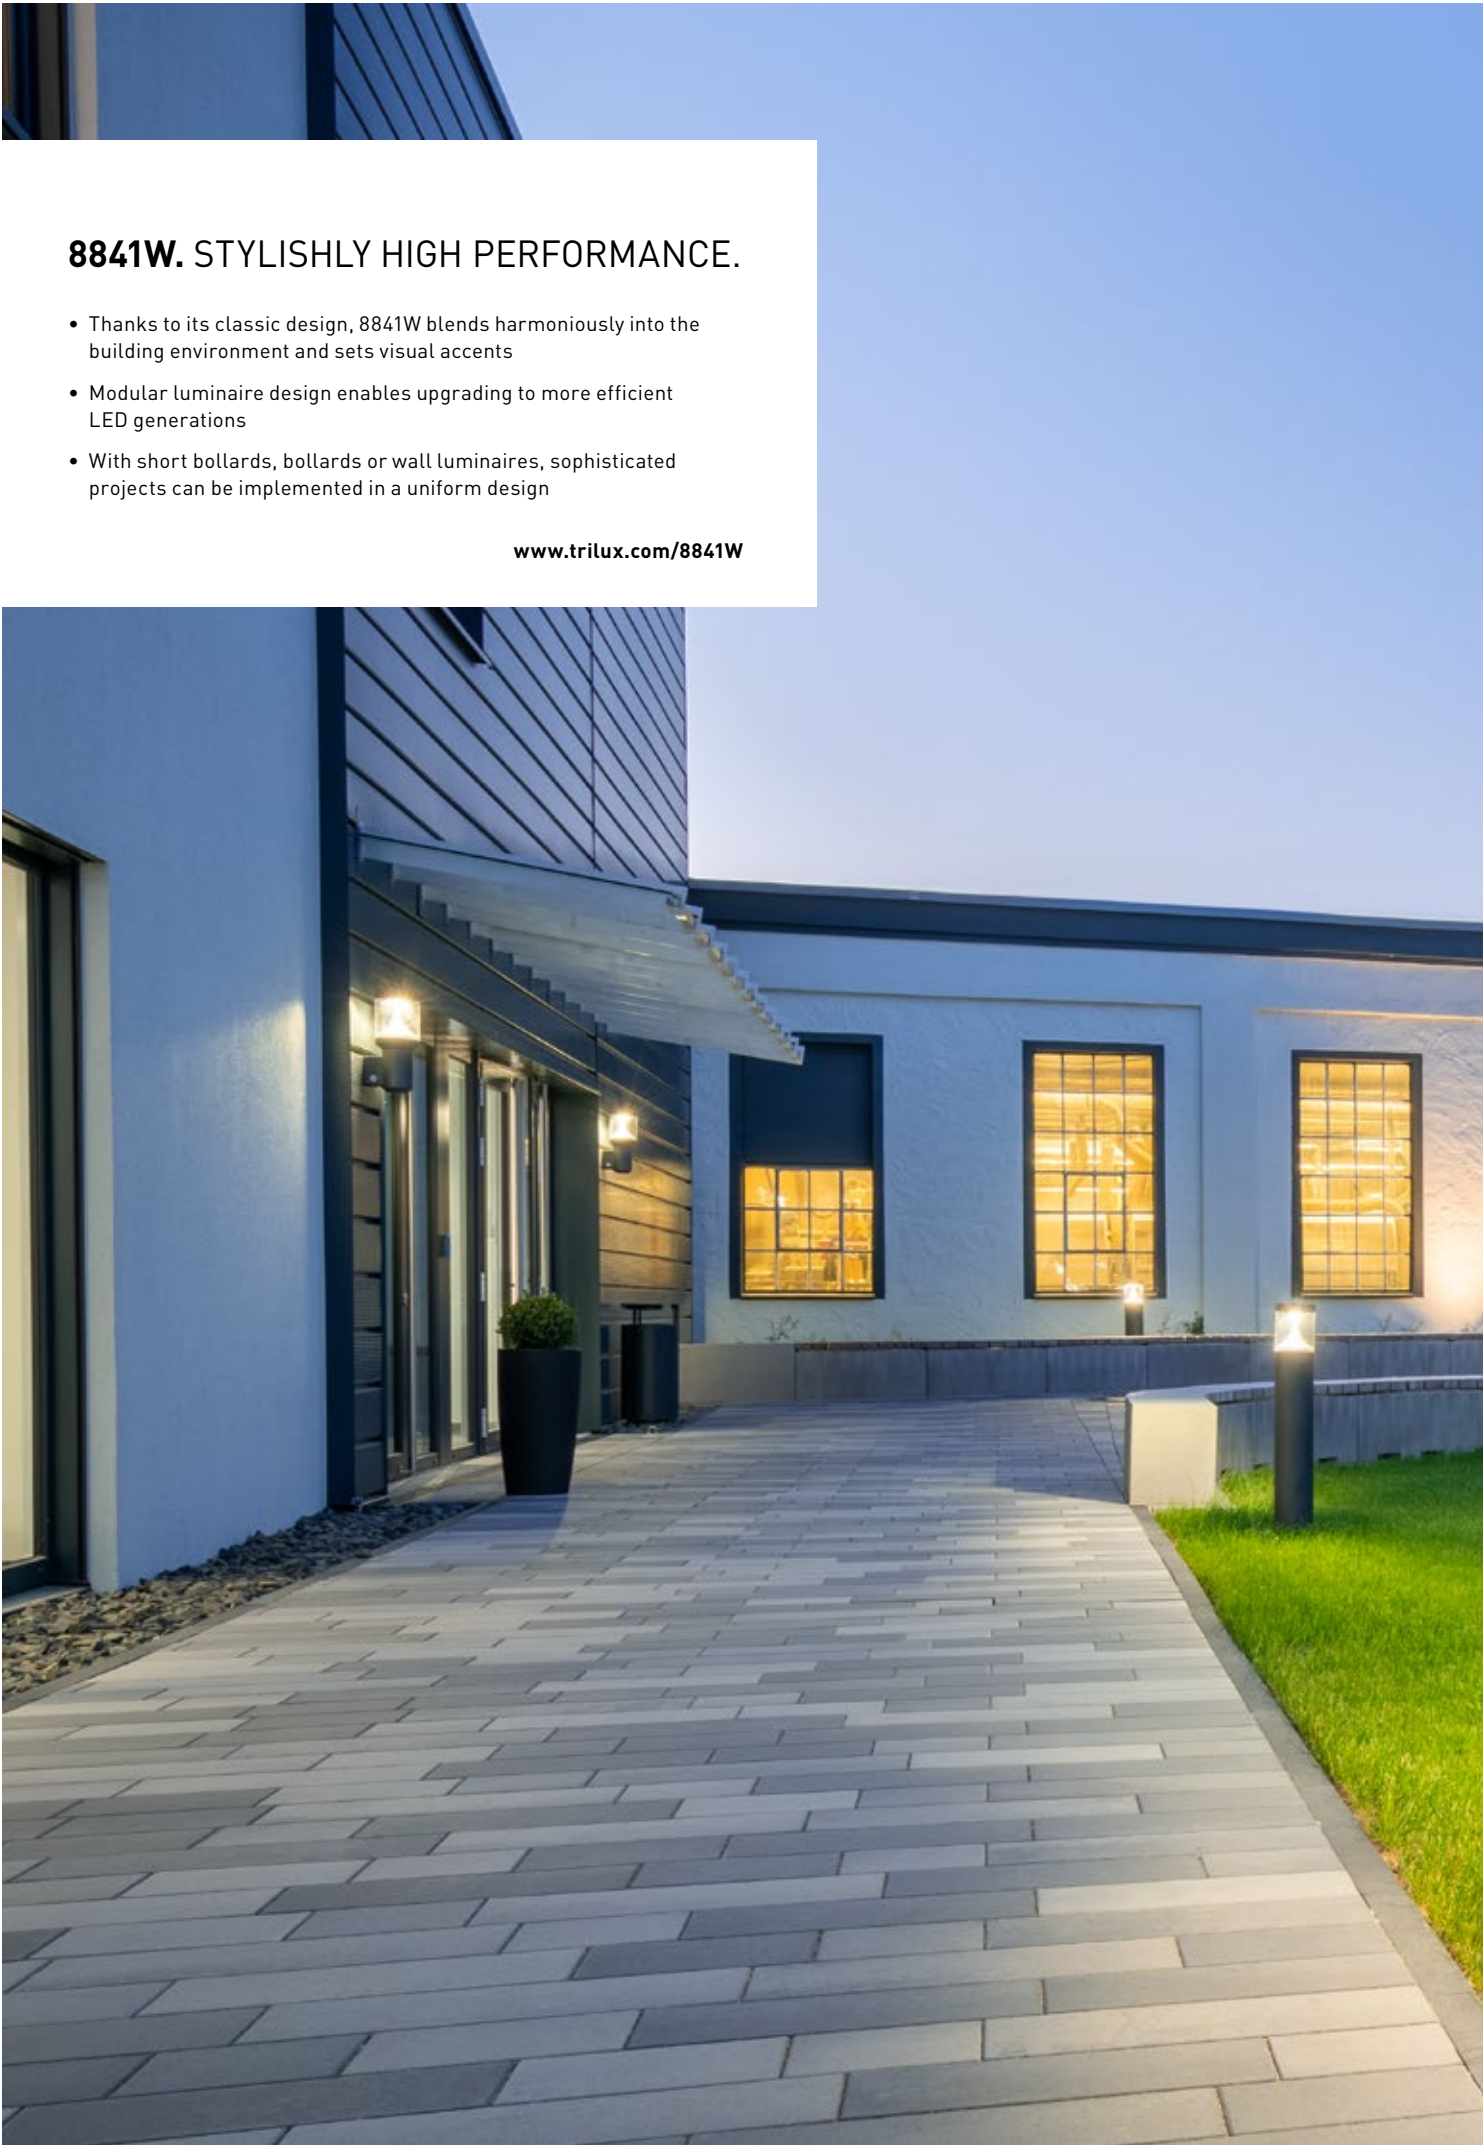

8841W. STYLISHLY HIGH PERFORMANCE.

- Thanks to its classic design, 8841W blends harmoniously into the building environment and sets visual accents
- Modular luminaire design enables upgrading to more efficient LED generations
- With short bollards, bollards or wall luminaires, sophisticated projects can be implemented in a uniform design

www.trilux.com/8841W

Detailed product information:
www.trilux.com/8841W



8841W

WALL AND CEILING LUMINAIRES

8841W	
	Mounting type Surface-mounted
	Mounting location Outdoor wall
	Beam characteristic asymmetric wide
	Luminaire luminous flux 1,100 - 1,150 lm
	Colour rendering index Light colour Ra > 70 3,000 K 4,000 K
	Service life L80 = 50,000 h
	Luminaire colour anthracite
	Operating mode switchable (ET)

CE UK IP65



Complete range

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.