



ALTIGO WD. LIGHT LINE FOR ILLUMINATING PATHS AND FACADES.

- Diverse uses thanks to various lengths, selectable optics and several mounting options
- Slender, flat design for installation in difficult-to-access locations with low mounting space
- Robust and durable due to selected materials and high-quality workmanship

www.trilux.com/altigog2

Detailed product information:
www.trilux.com/altigog2




Altigo WD	
	Mounting type Surface-mounted Recessed
	Mounting location Outdoor ceiling Outdoor wall
	Beam characteristic symmetric narrow rotationally symmetric wide rotationally symmetric narrow rotationally symmetric medium wide
	Luminaire luminous flux 300 - 4,000 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K
	Service life L80 = 50,000 h
	Luminaire colour anthracite
	Accessories Connectors Control gear Mounting accessories

CE UK IP65

ALTIGO WD

WALL AND CEILING LUMINAIRES

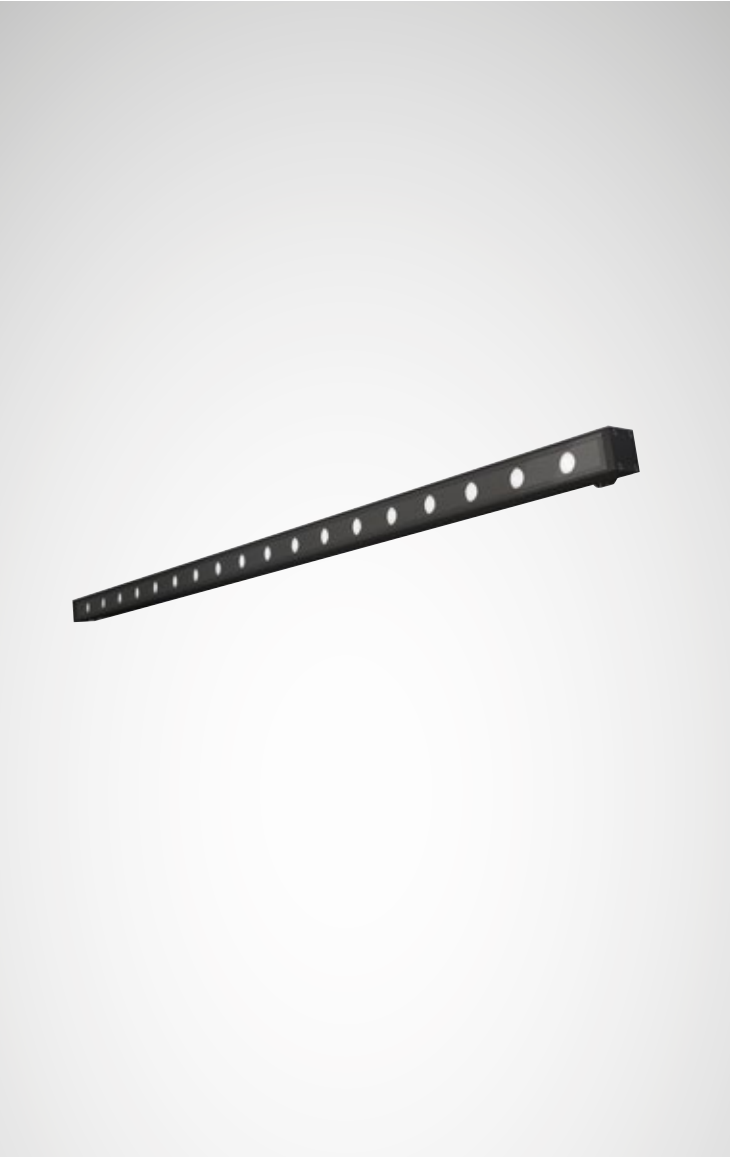

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.