


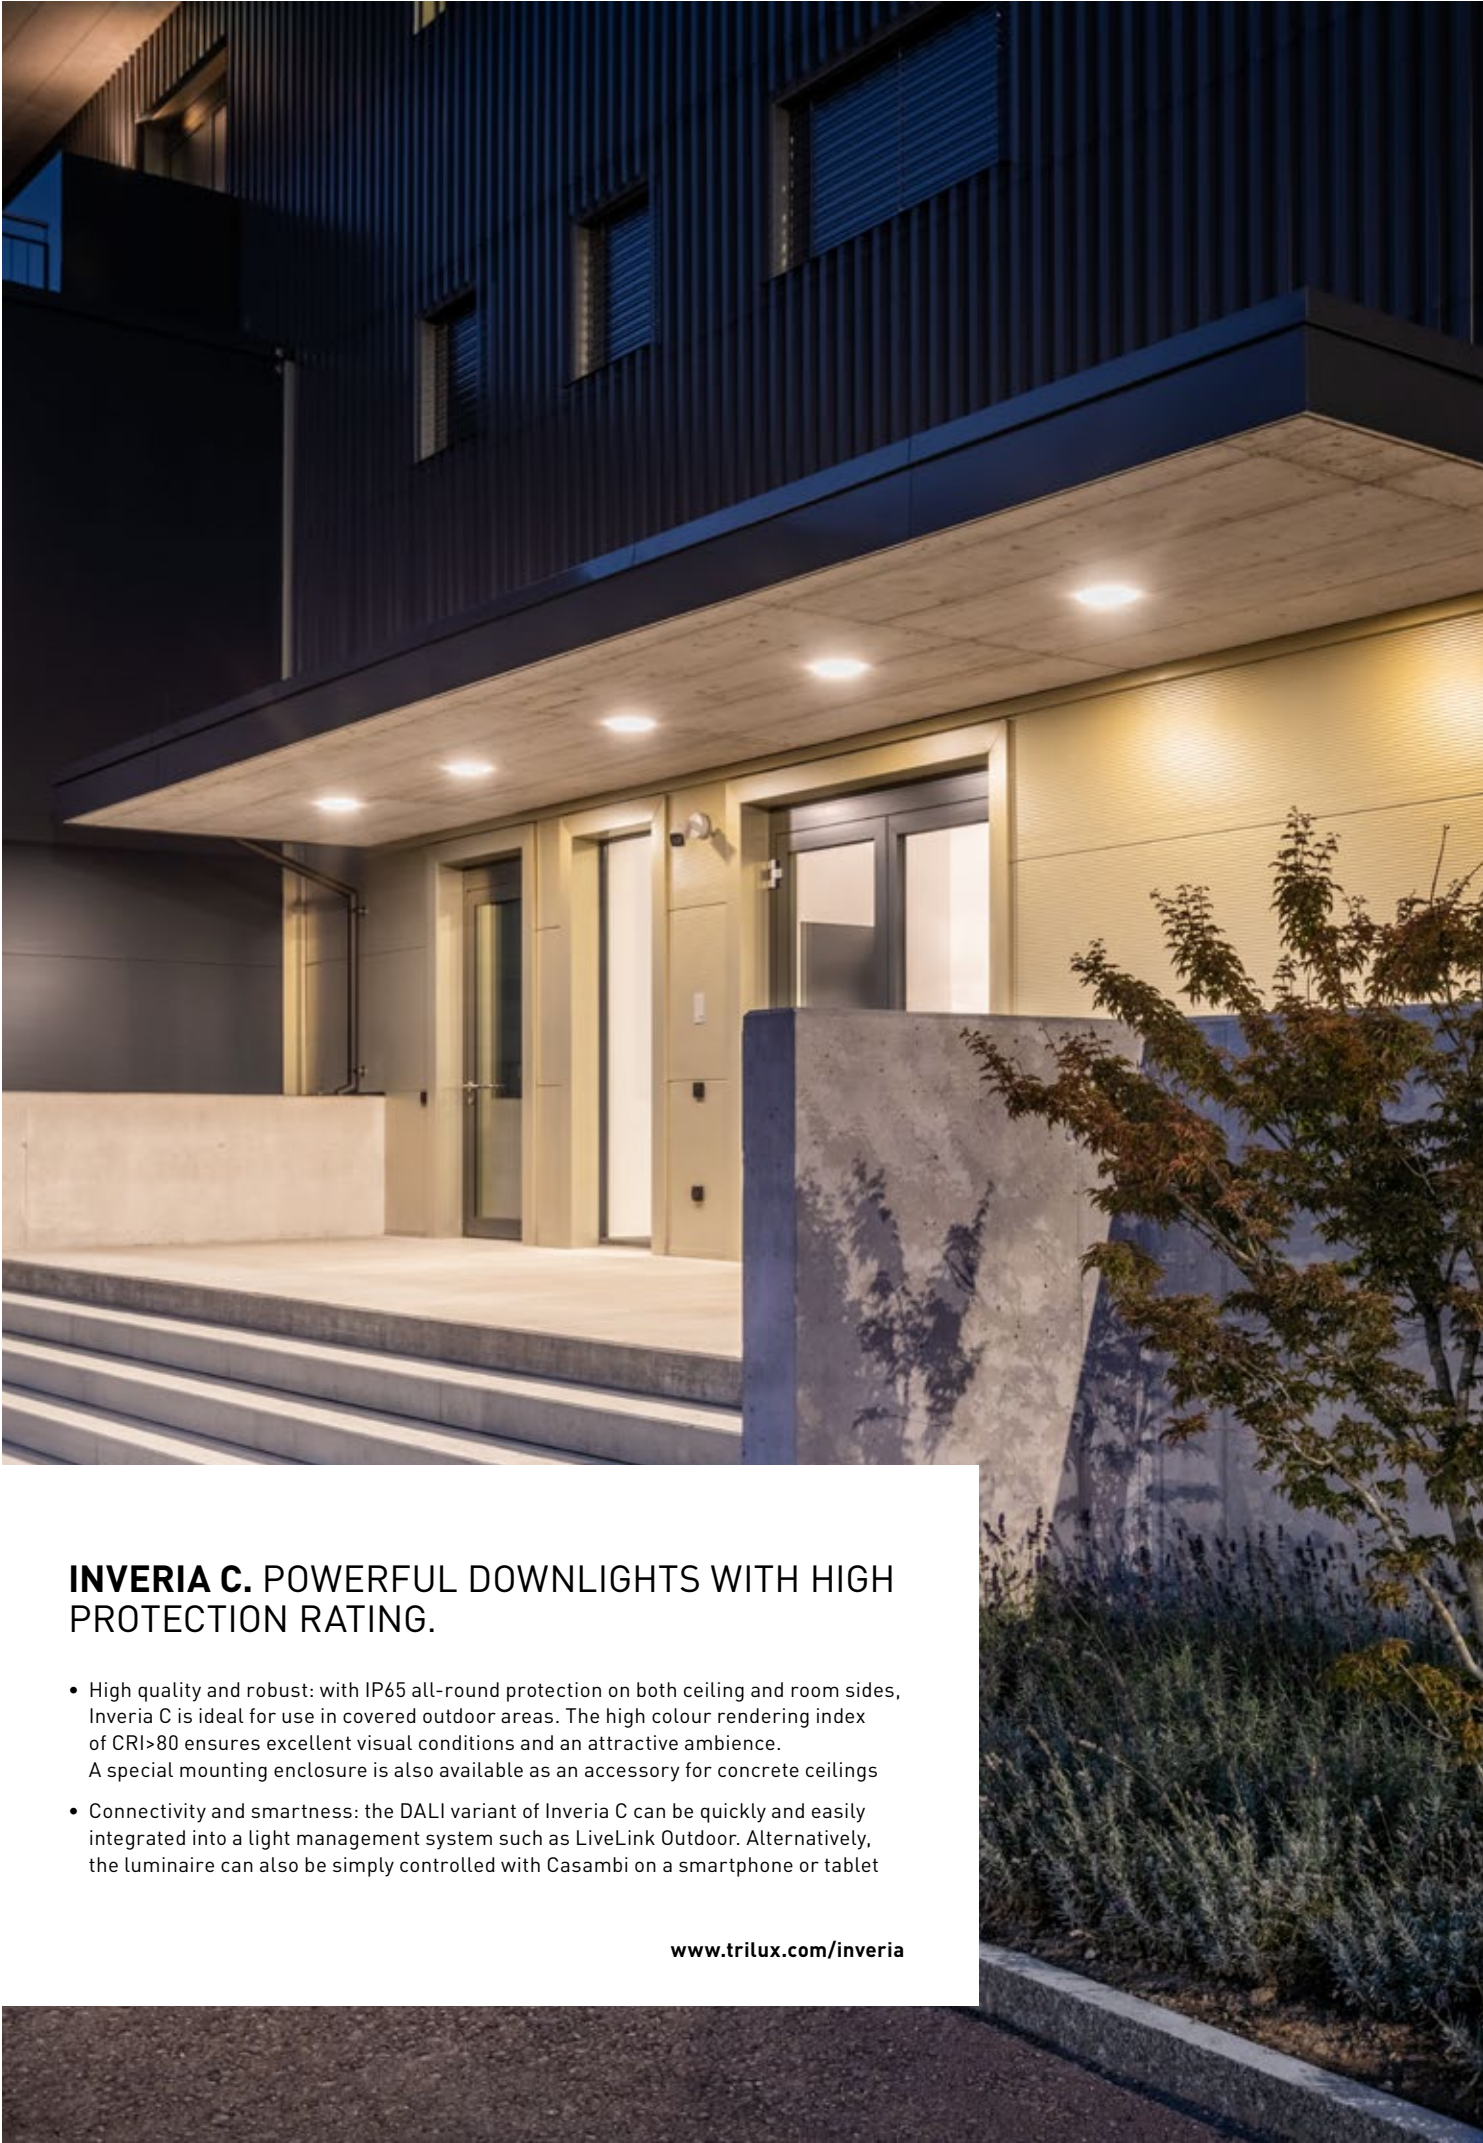

**INVERIA C. POWERFUL DOWNLIGHTS WITH HIGH PROTECTION RATING.**

- High quality and robust: with IP65 all-round protection on both ceiling and room sides, Inveria C is ideal for use in covered outdoor areas. The high colour rendering index of CRI>80 ensures excellent visual conditions and an attractive ambience. A special mounting enclosure is also available as an accessory for concrete ceilings
- Connectivity and smartness: the DALI variant of Inveria C can be quickly and easily integrated into a light management system such as LiveLink Outdoor. Alternatively, the luminaire can also be simply controlled with Casambi on a smartphone or tablet

[www.trilux.com/inveria](http://www.trilux.com/inveria)

Detailed product information:  
[www.trilux.com/inveria](http://www.trilux.com/inveria)



| Inveria                                                                               |                                                                                                                                                            |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Mounting type</b><br>Recessed                                                                                                                           |
|  | <b>Mounting location</b><br>Outdoor ceiling                                                                                                                |
|  | <b>Beam characteristic</b><br>rotationally symmetric wide<br>asymmetric medium-wide<br>rotationally symmetric narrow<br>rotationally symmetric medium wide |
|  | <b>Luminaire luminous flux</b><br>900 - 3,900 lm                                                                                                           |
|  | <b>Colour rendering index   Light colour</b><br>Ra > 80<br>3,000 K<br>4,000 K                                                                              |
|  | <b>Service life</b><br>L80 = 60,000 h                                                                                                                      |
|  | <b>Luminaire colour</b><br>black                                                                                                                           |
|  | <b>Operating mode</b><br>switchable and DALI dimmable (ETDD)<br>Bluetooth Low Energy (ETBLE)<br>switchable (ET)                                            |
|  | <b>Connectivity</b><br>Casambi capable                                                                                                                     |
|  | <b>Accessories</b><br>Concrete casting box<br>Spare parts<br>Drop safety device                                                                            |

CE UK IP65

INVERIA

WALL AND CEILING LUMINAIRES



# CONTACTS

## **TRILUX GmbH & Co. KG**

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

[www.trilux.com/en](http://www.trilux.com/en)

## **SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.**

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

[www.endalight.com](http://www.endalight.com)

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.