


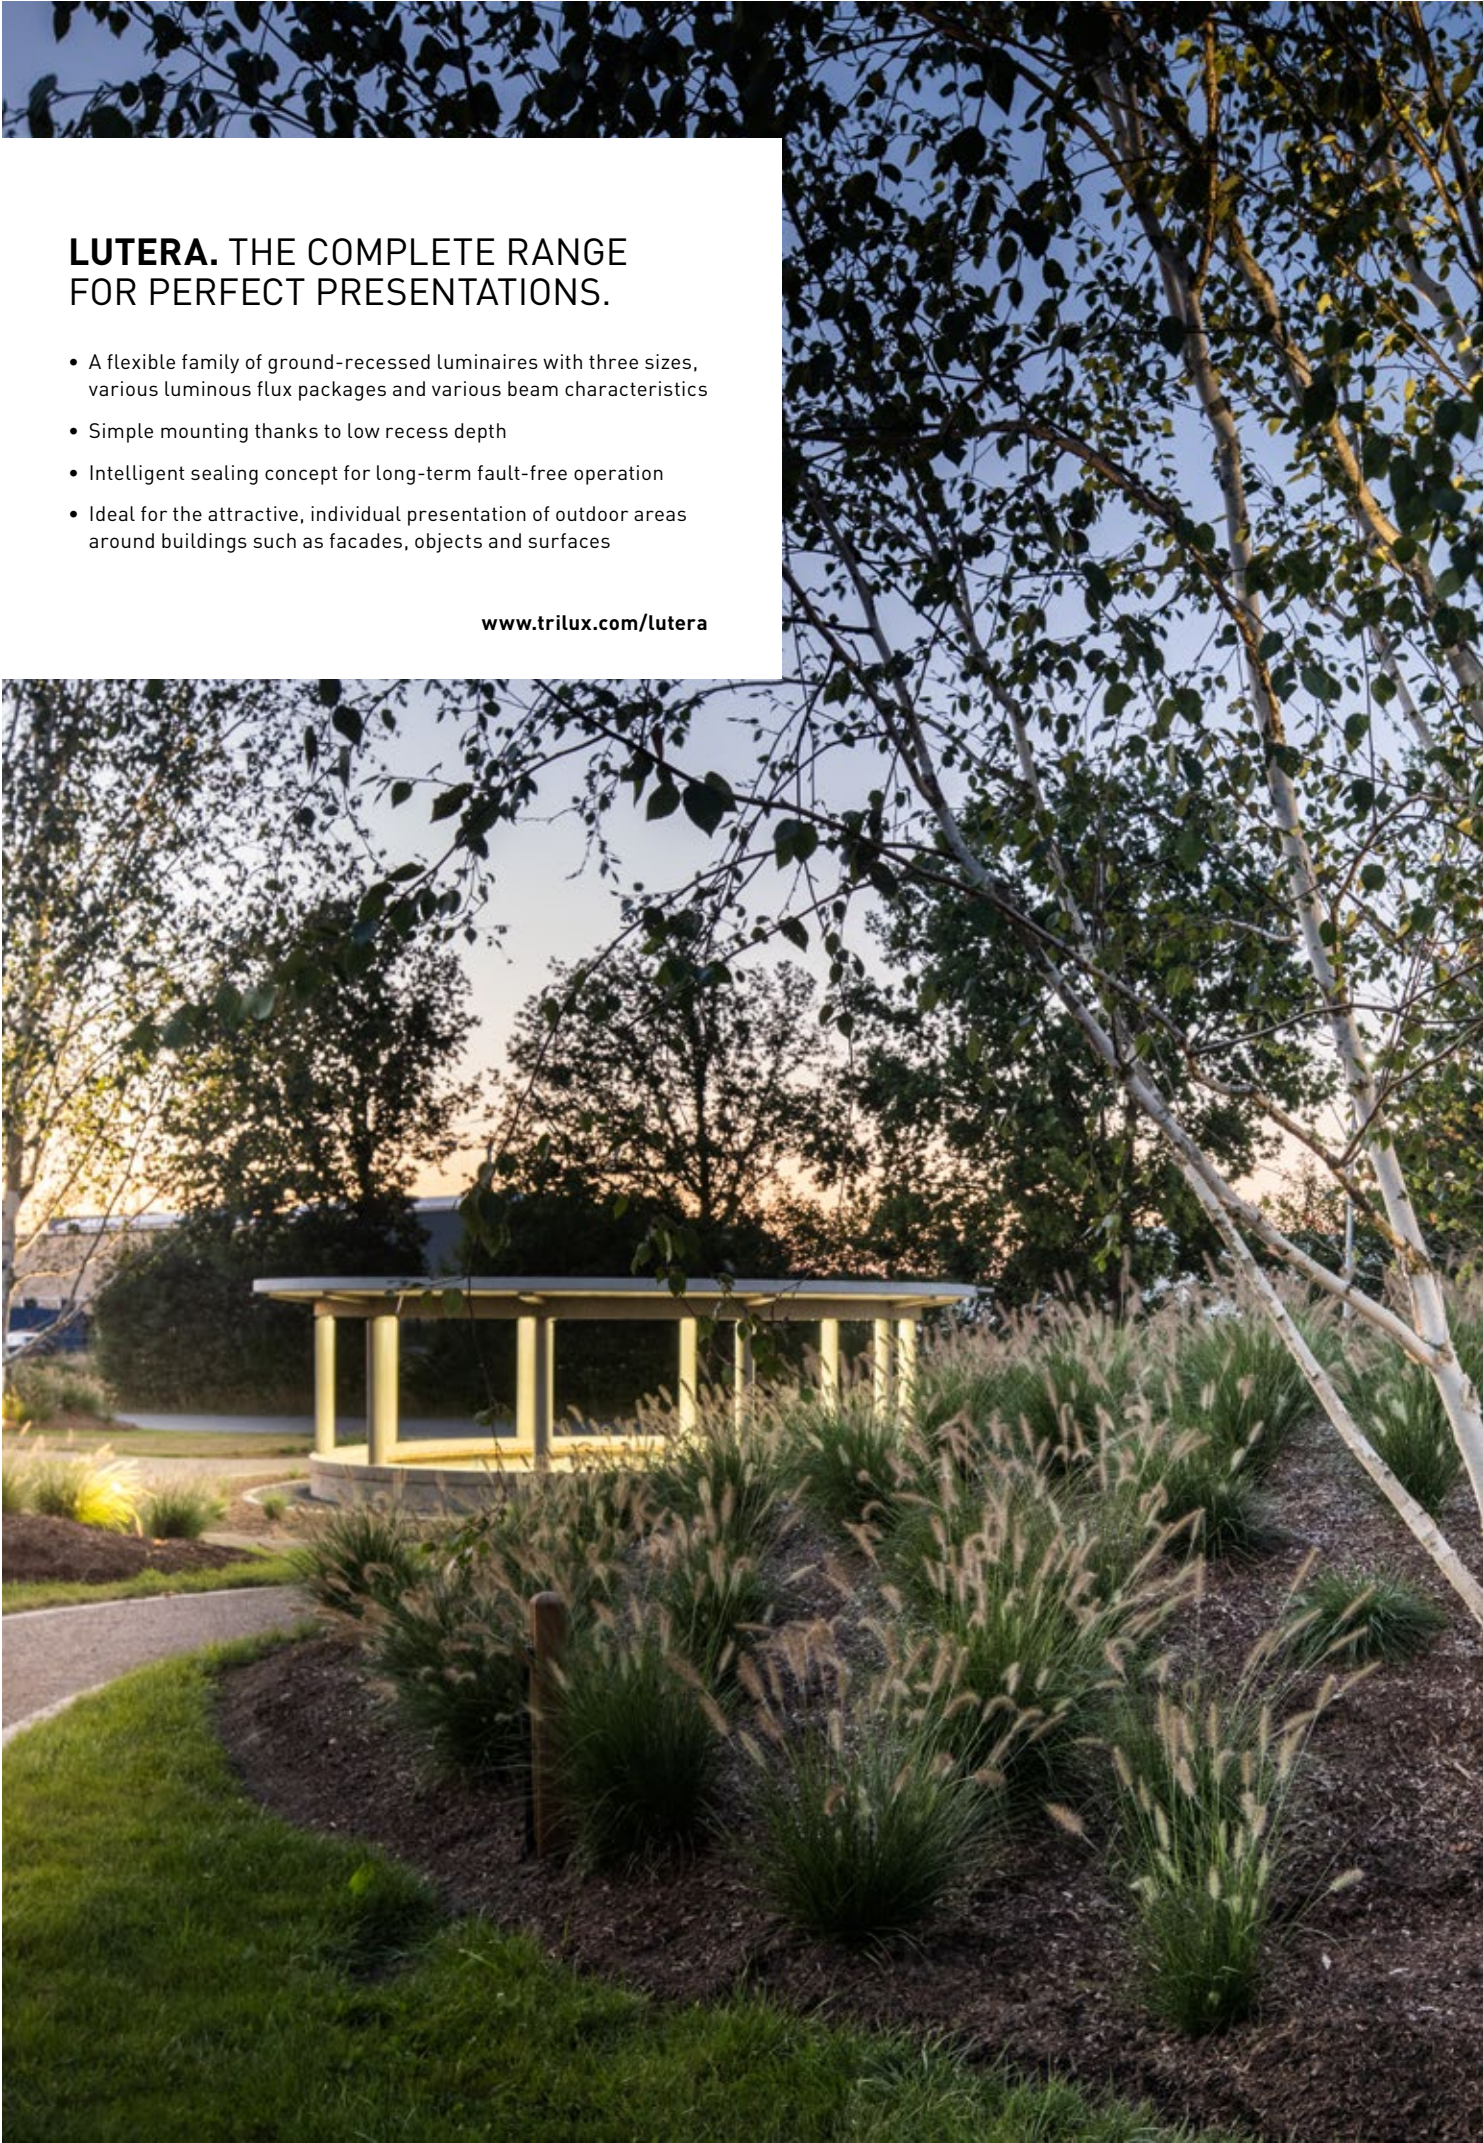

LUTERA. THE COMPLETE RANGE
FOR PERFECT PRESENTATIONS.

- A flexible family of ground-recessed luminaires with three sizes, various luminous flux packages and various beam characteristics
- Simple mounting thanks to low recess depth
- Intelligent sealing concept for long-term fault-free operation
- Ideal for the attractive, individual presentation of outdoor areas around buildings such as facades, objects and surfaces


www.trilux.com/lutera

Detailed product information:
www.trilux.com/lutera



Lutera	
	Mounting type Outdoor ground-recessed
	Mounting location Outdoor ground
	Beam characteristic rotationally symmetric wide rotationally symmetric narrow rotationally symmetric medium wide asymmetric
	Luminaire luminous flux 120 - 2,900 lm
	Colour rendering index Light colour Ra > 80 3,000 K 4,000 K amber blue green red
	Service life L80 = 50,000 h
	Luminaire colour black
	Operating mode switchable and DALI dimmable forward phase control (ETD) switchable (ET)
	Accessories Cover glasses Cover plates Ground mounting enclosure Sealings Filters Connections

CE   IP68

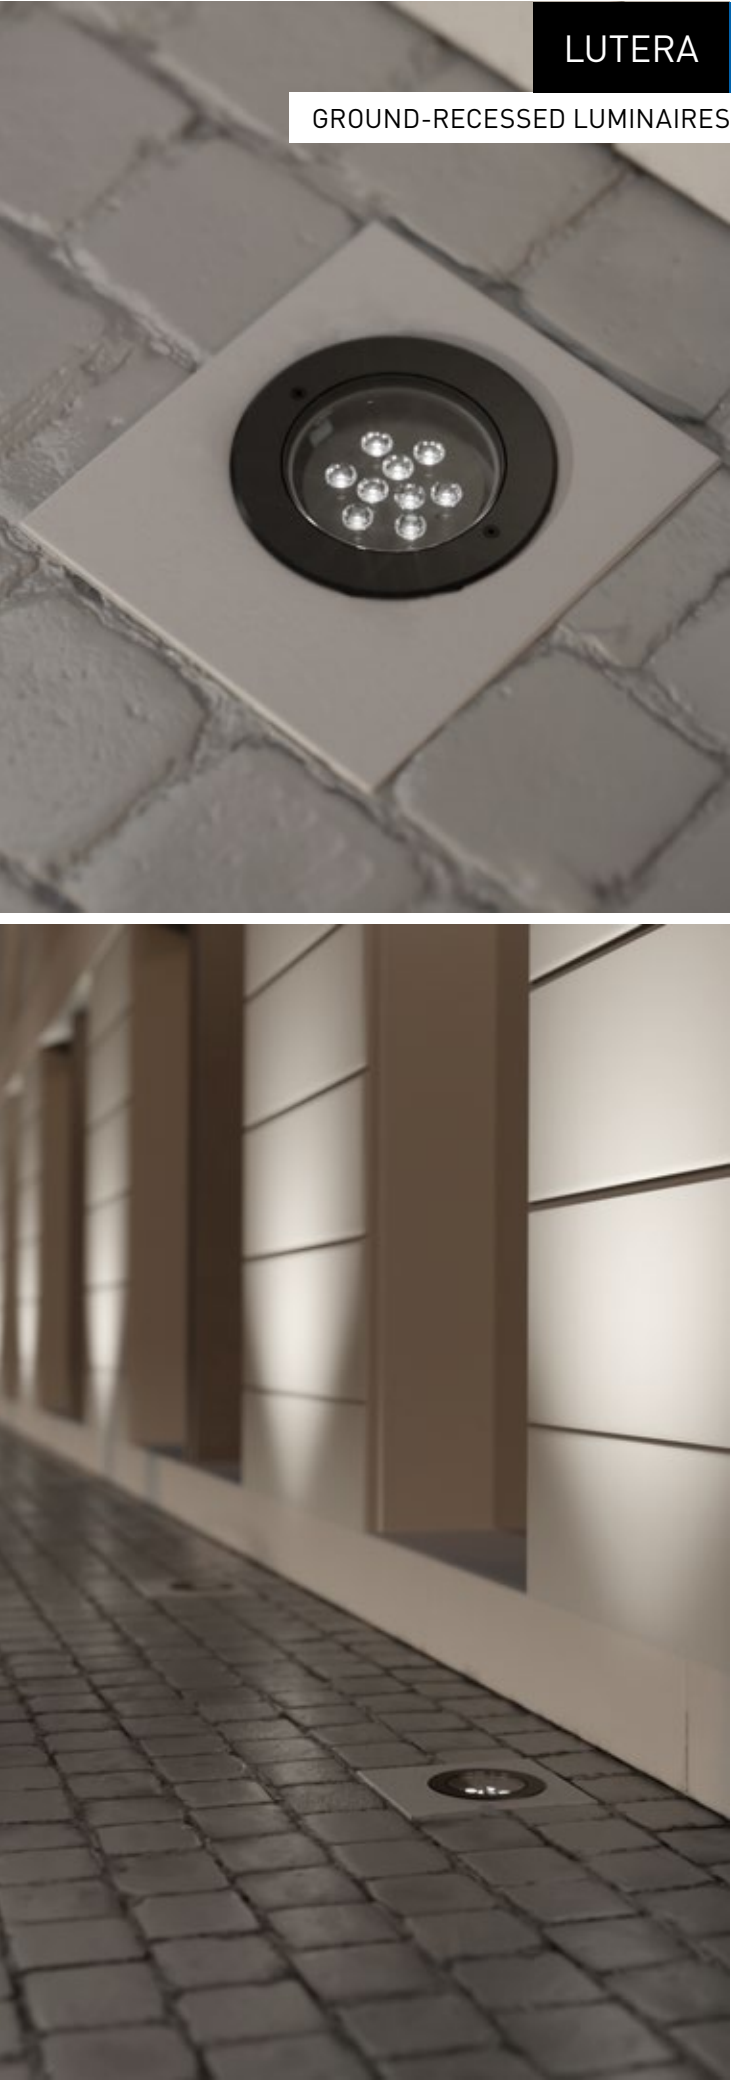

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.