


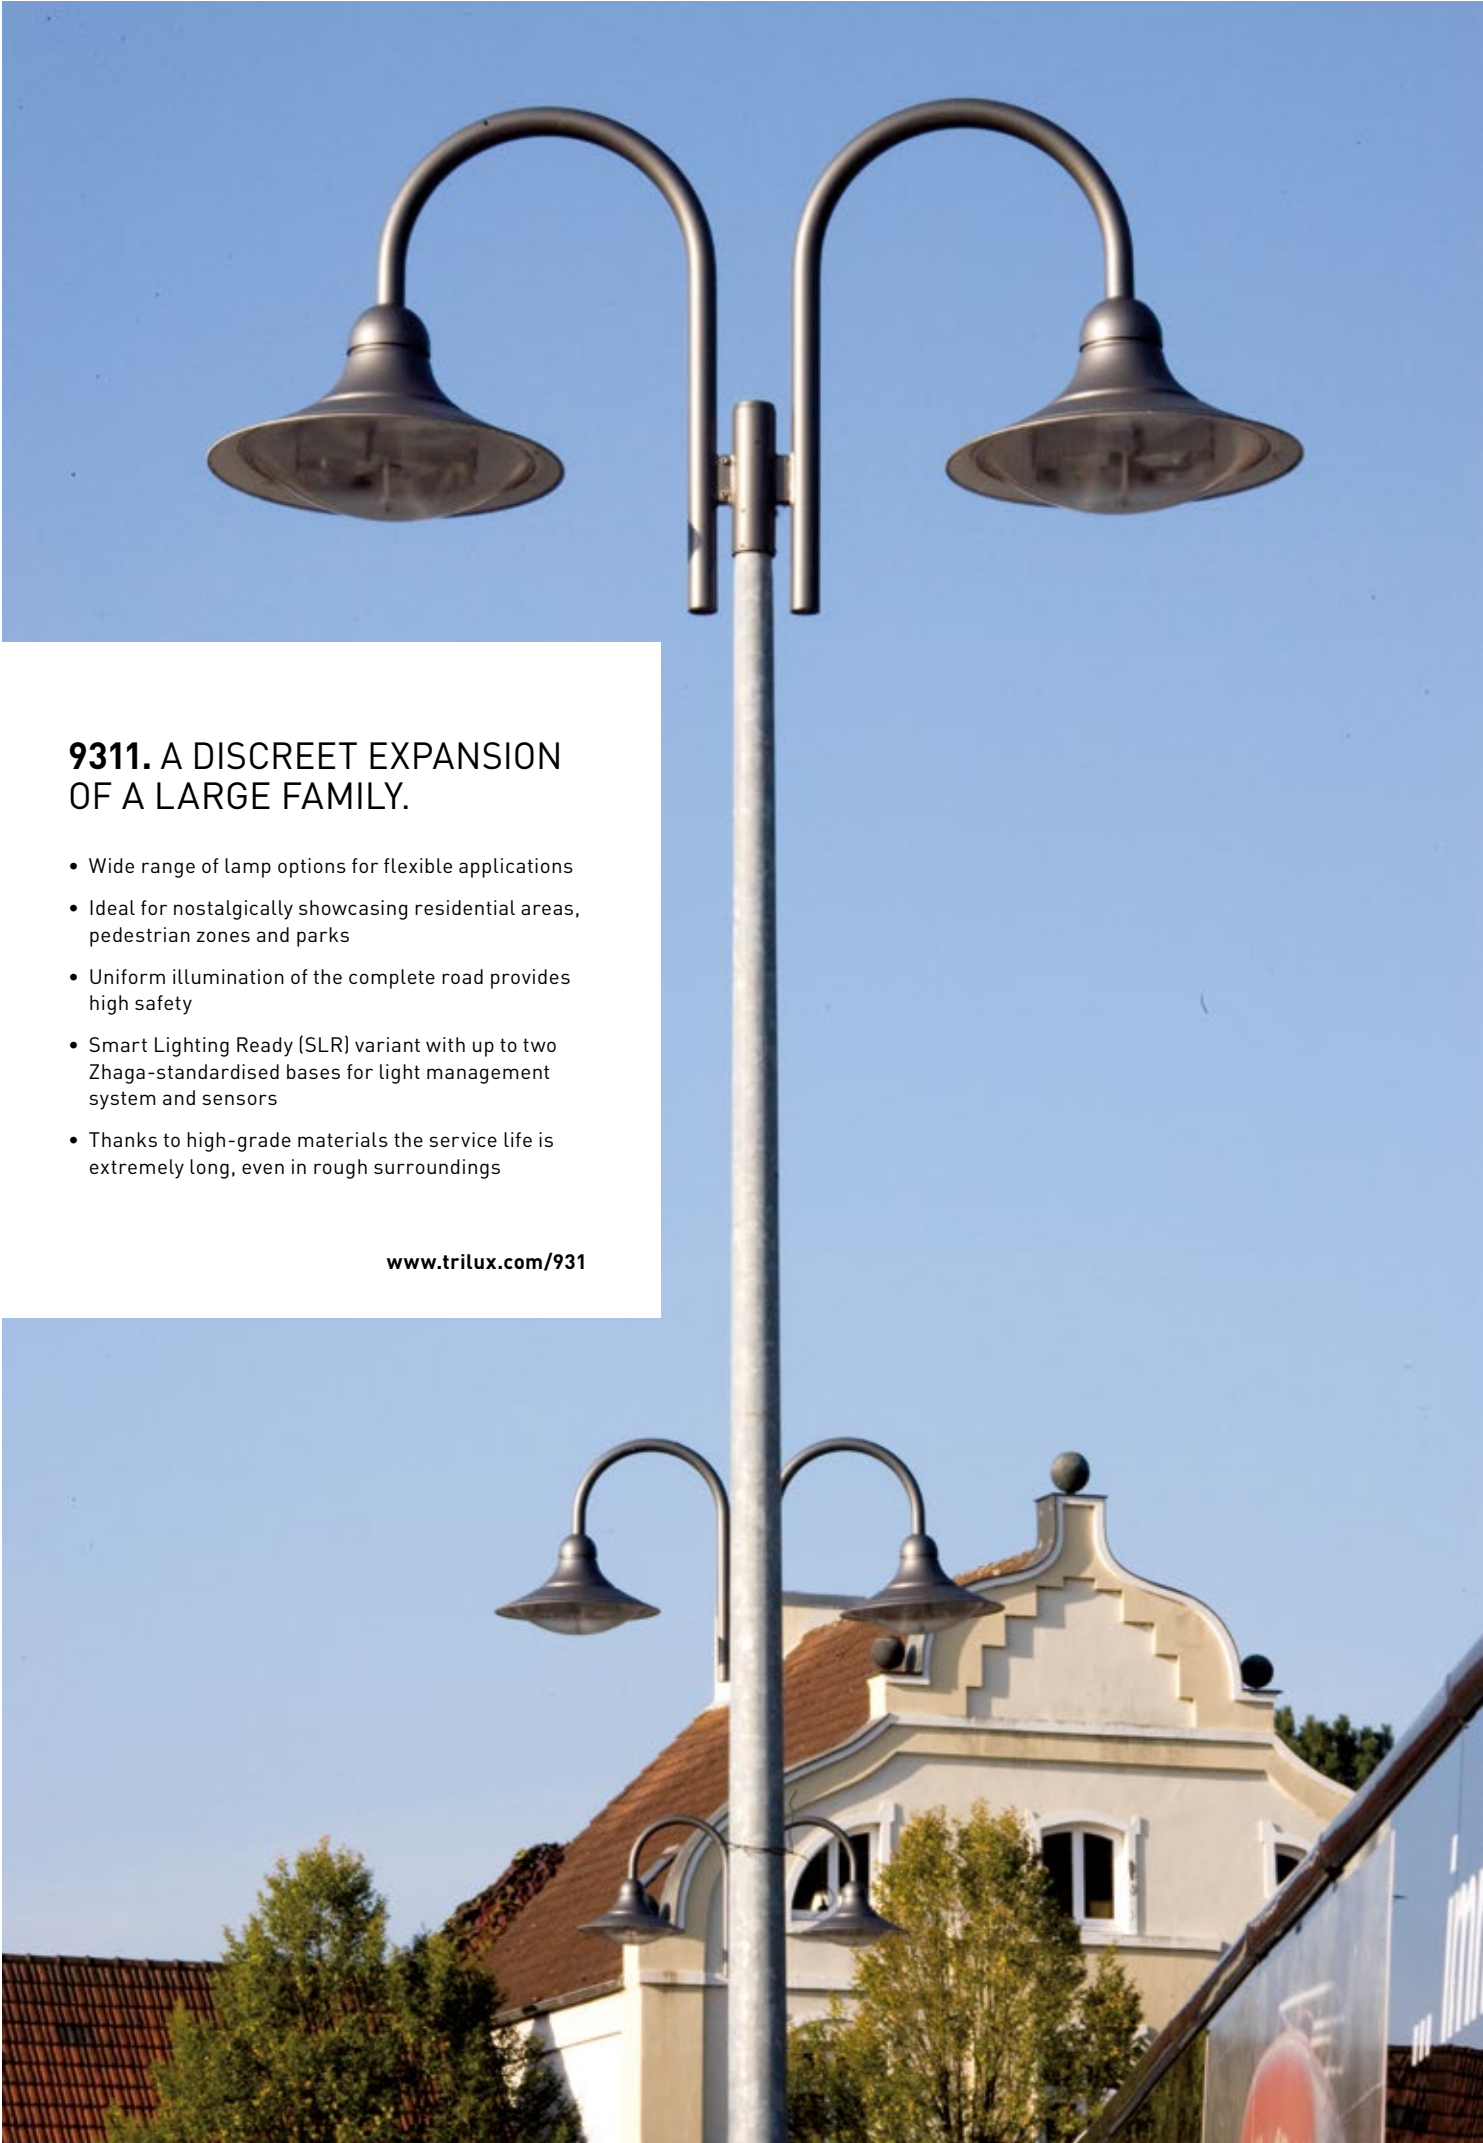

**9311. A DISCREET EXPANSION
OF A LARGE FAMILY.**

- Wide range of lamp options for flexible applications
- Ideal for nostalgically showcasing residential areas, pedestrian zones and parks
- Uniform illumination of the complete road provides high safety
- Smart Lighting Ready (SLR) variant with up to two Zhaga-standardised bases for light management system and sensors
- Thanks to high-grade materials the service life is extremely long, even in rough surroundings

www.trilux.com/931

Detailed product information:
www.trilux.com/931



9311	
	Mounting type Post-top-mounted Surface-mounted
	Light point height 3 - 6 m
	Mounting location Outdoor posts Outdoor wall
	Design Curved post
	Beam characteristic asymmetric wide
	Luminaire luminous flux 3,500 - 4,600 lm
	Colour rendering index Light colour Ra > 70 3,000 K 4,000 K
	Service life L80 = 100,000 h
	Luminaire colour black
	Operating mode switchable (ET)
	Connectivity Smart Lighting Ready (SLR)
	Additional equipment Power reduction, control phase (LR) Power reduction, self-sufficient (LRA) Constant Light Output (CLO)
	Accessories Shieldings Post mounting elements Wall mountings

    IP65



9311

POST LUMINAIRES

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg

Postfach 19 60 • D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.