**POST LUMINAIRES** 





Detailed product information: www.trilux.com/lumantix





### Mounting type

Post-top-mounted

# $\overline{\bigwedge}$ Light point height 3 - 6 m

🚨 Mounting location Outdoor posts

### riangle Design

Cylinder Classic Lantern Conical

## 🚡 Beam characteristic

asymmetric wide rotationally symmetric wide symmetric wide

#### 1,000 - 3,800 lm

#### 🤅 Colour rendering index | Light colour Ra > 70

3,000 K 4,000 K

# ① Service life L80 = 100,000 h

#### C Luminaire colour anthracite

□ Operating mode

switchable and DALI dimmable (ETDD) switchable (ET)

('(j') Connectivity
Smart Lighting Ready (SLR)


#### 🌣 Additional equipment

Power reduction, control phase (LR) Power reduction, self-sufficient (LRA)
Multilumen (ML)
Constant Light Output (CLO)

#### Accessories

Shieldings Junction boxes Post mounting elements Reduction pieces



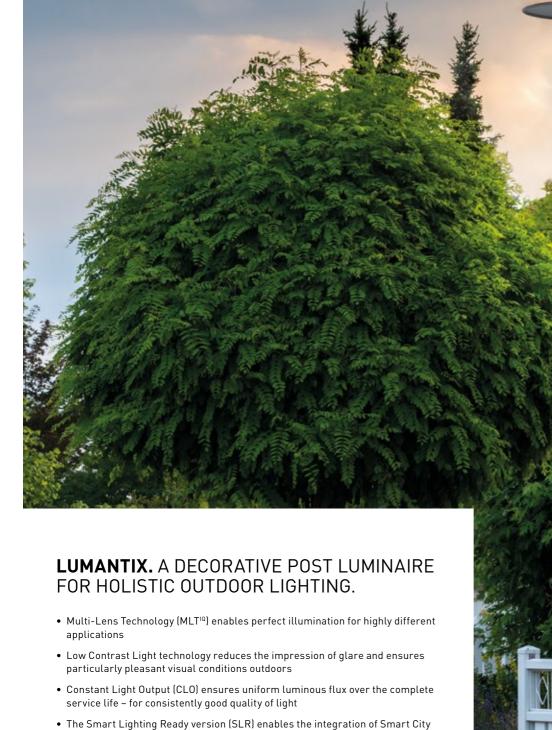

functions via the Zhaga-standardised base

• Blends harmoniously into modern and traditional surroundings

www.trilux.com/lumantix



# **CONTACTS**

#### TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

#### SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43