


PUBLISCA P1/P2/P3 POST LUMINAIRES



PUBLISCA P1/P2/P3. THE PUBLIC'S FAVOURITE WITH RELIABLE TECHNOLOGY.

- Various light colours, mounting heights, luminous flux levels, beam characteristics and designs provide perfect light for paths, residential roads, squares and inner city zones
- The modular design enables all photometric parameters to be precisely modified to the application
- Multi-lens technology (MLT¹⁰) enables Publisca P3 luminaires to be individually adapted to customer-specific lighting tasks
- The Smart Lighting Ready (SLR) version of the Publisca P3 luminaire can be retrofitted with a light management system and various sensors

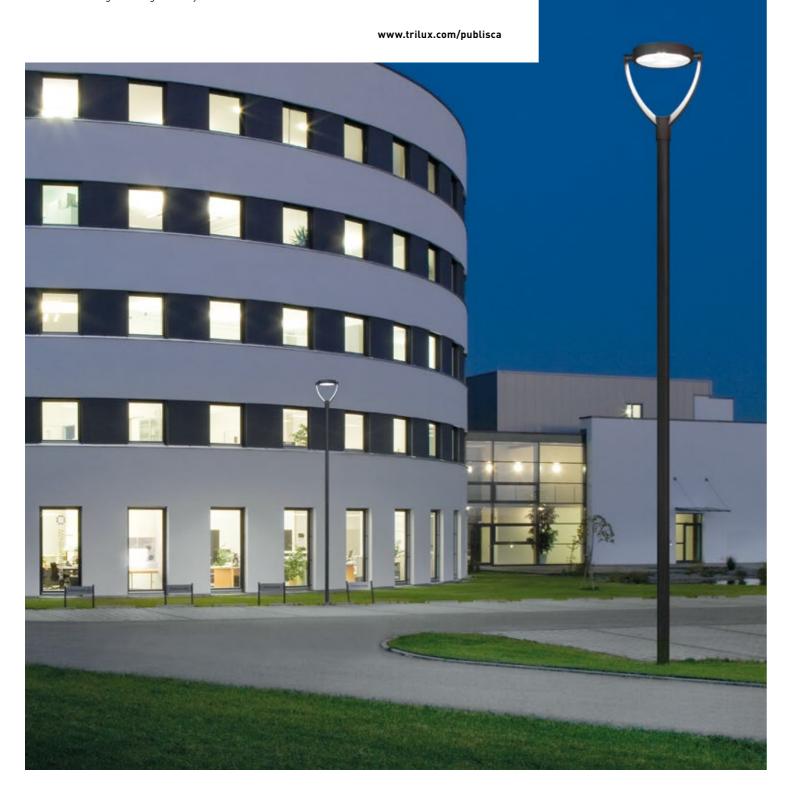



Mounting type
Post-top-mounted

This is a second second with the second seco

& Mounting location

Outdoor posts

Design
Publisca P1/P2
curved
trapezoidal
Publisca P3
round

Beam characteristic

asymmetric wide rotationally symmetric wide symmetric wide

Q Luminaire luminous flux 800 - 6,800 lm

Colour rendering index | Light colour Ra > 70
 3,000 K
 4,000 K

Service life L80 = 100,000 h

C Luminaire colour anthracite

♥ Operating mode switchable and DALI dimmable (ETDD) switchable (ET)

(1) Connectivity
Publisca P3
Smart Lighting Ready (SLR)

Additional equipment

Power reduction, control phase (LR)

Power reduction, self-sufficient (LRA)

Constant Light Output (CLO)

Publisca P3

Multilumen (ML)

Accessories
Shieldings
Reduction pieces
Canopy

图 (€ 院 🕸 🗆 IP66

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase • D-59759 Arnsberg
Postfach 19 60 • D-59753 Arnsberg
GERMANY
Tel. +49 2932 301-0
www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.Ş.

Şerifali Mah. Barbaros Cad. No 18 34775 Ümraniye Istanbul TURKEY

Tel: +90 (216) 499 46 64 www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.

www.trilux.com 252-GB-int. 104 295 43